



6079

COLOR NUMBER

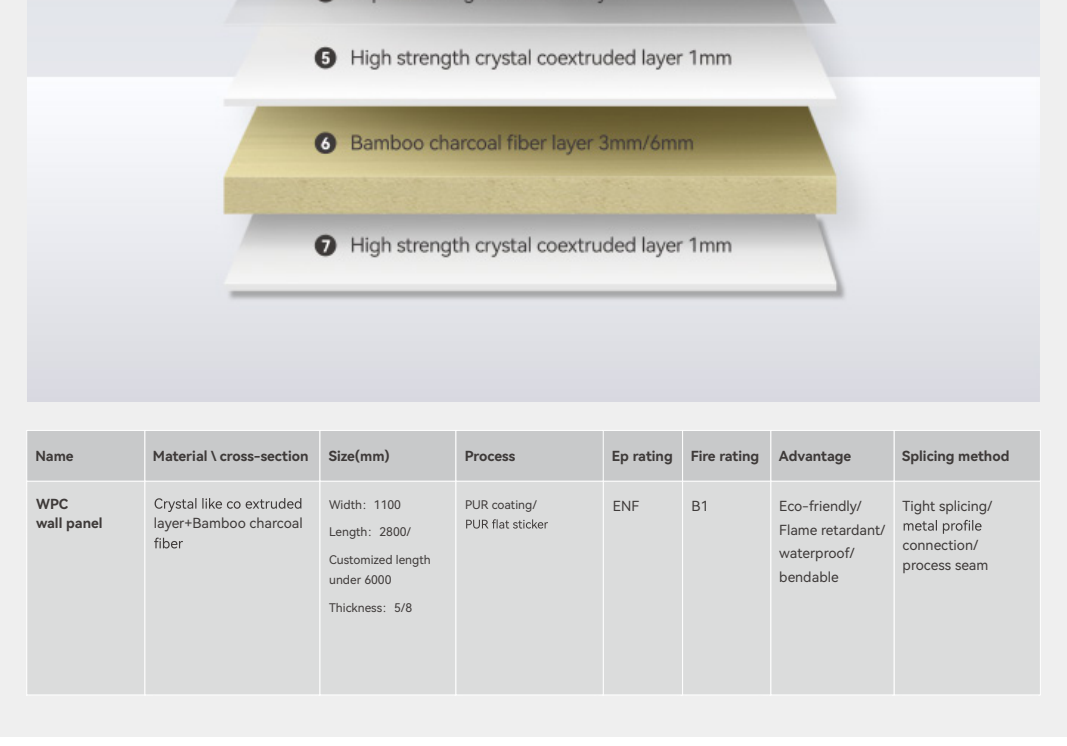


PRODUCT INFORMATION

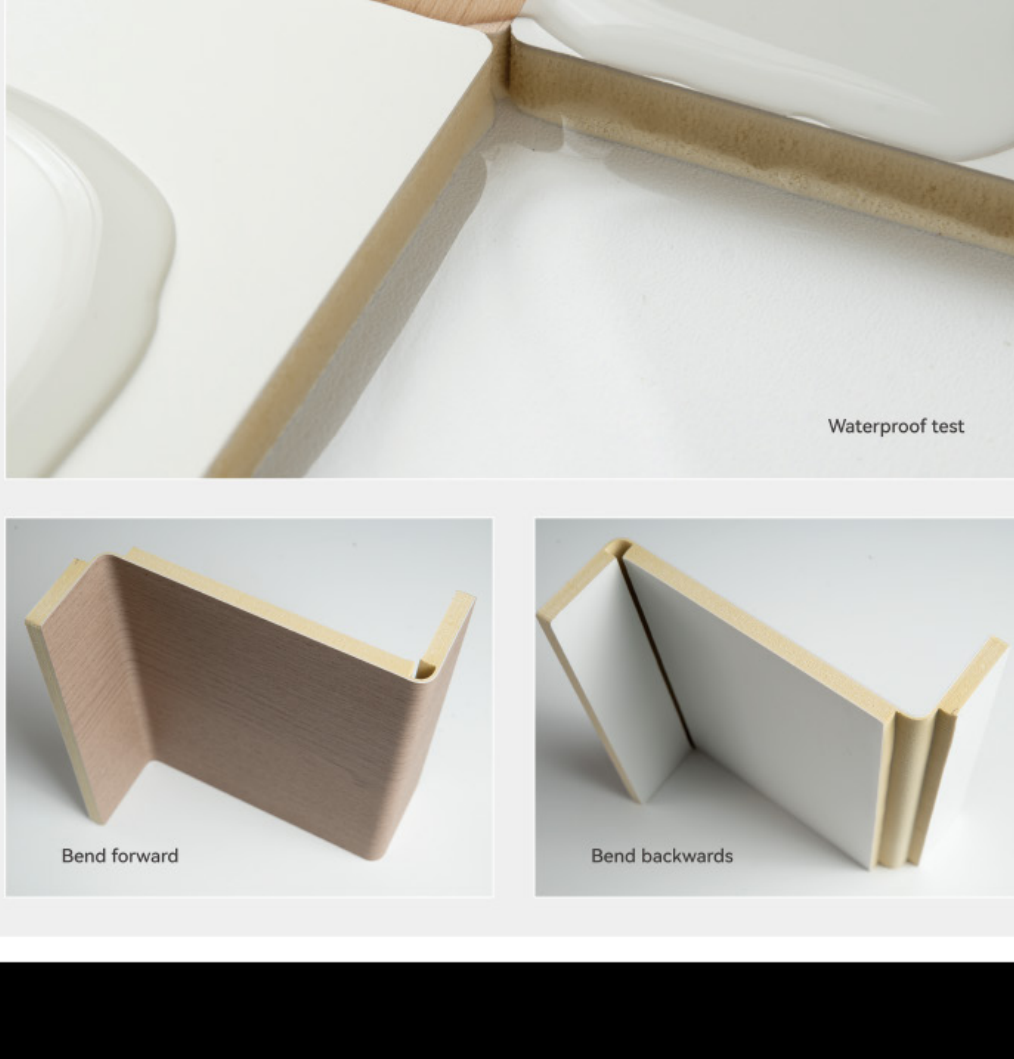


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer-Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT




EP LEVEL



FIRE RATING




WATERPROOF




BENDABLE


MORE CLOTH GRAIN COLORS

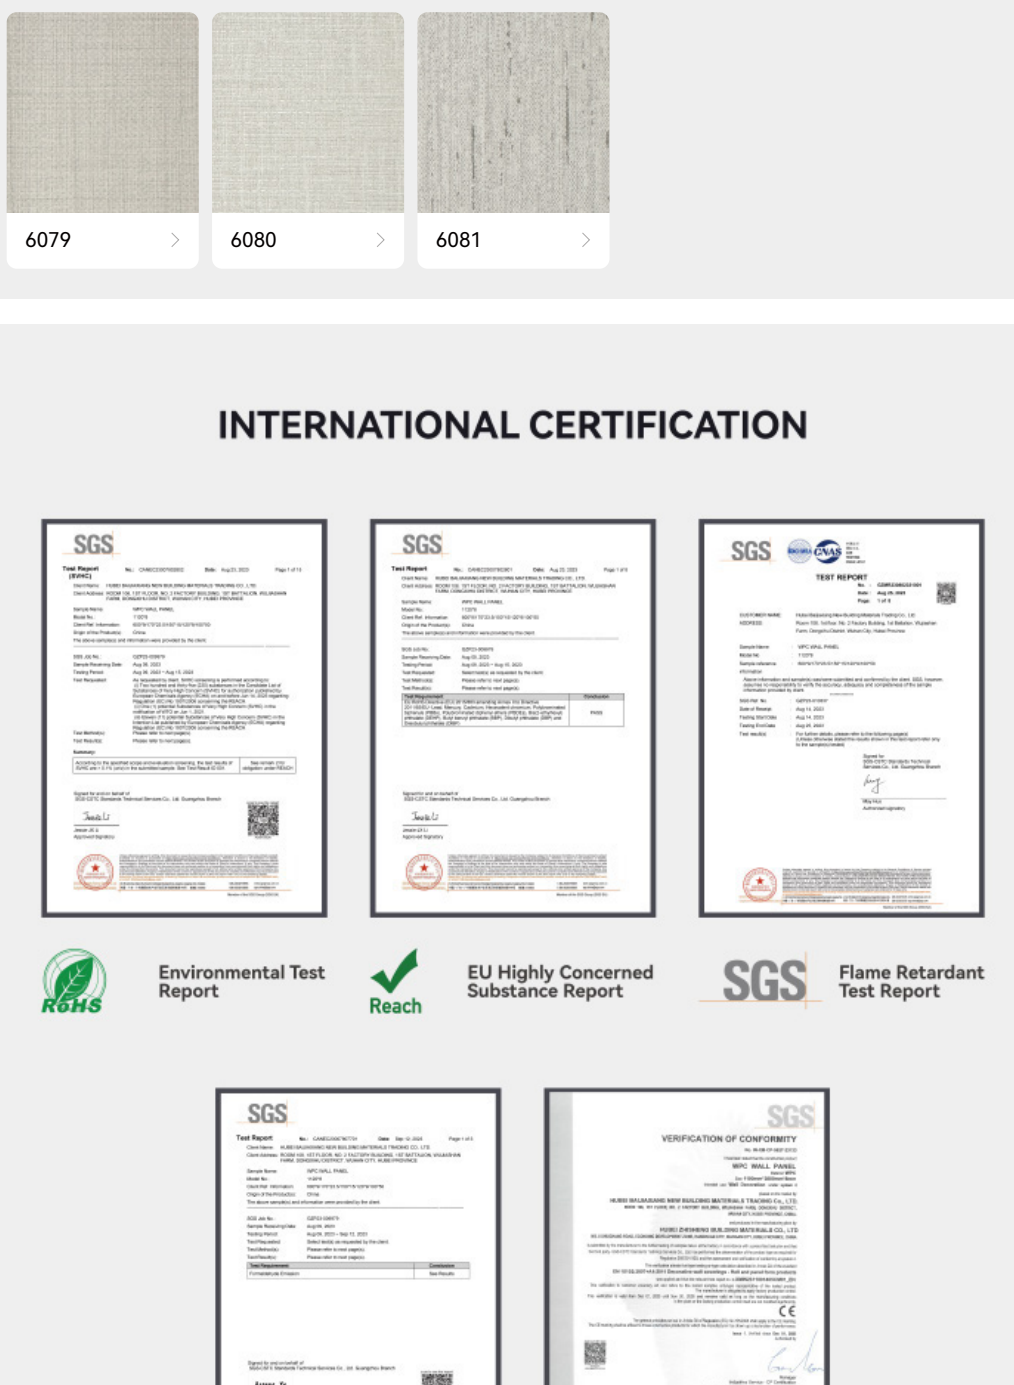


INTERNATIONAL CERTIFICATION

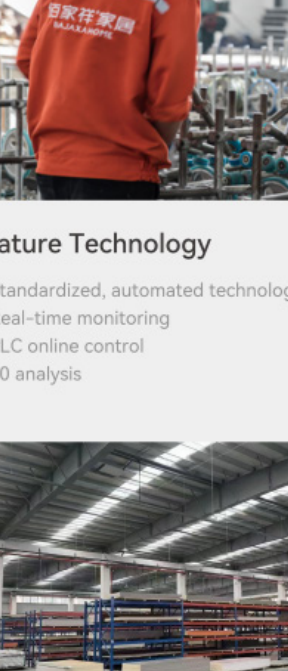


SGS Environmental Test Report

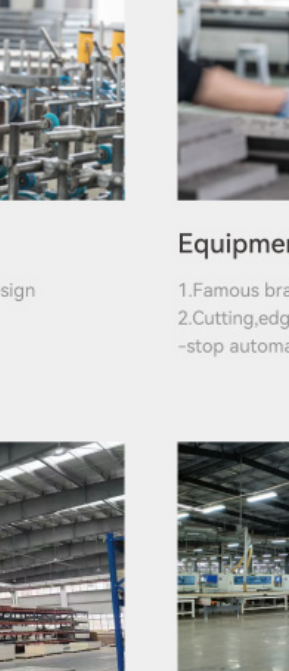


SGS EU Highly Concerned Substance Report

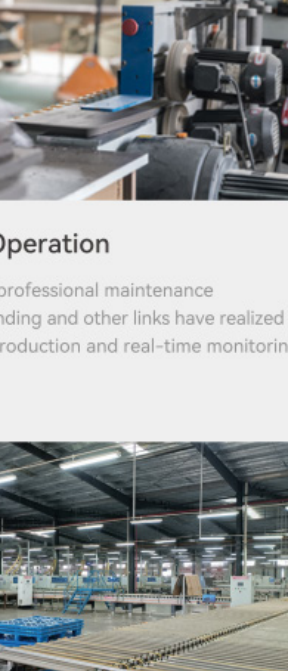

SGS Flame Retardant Test Report

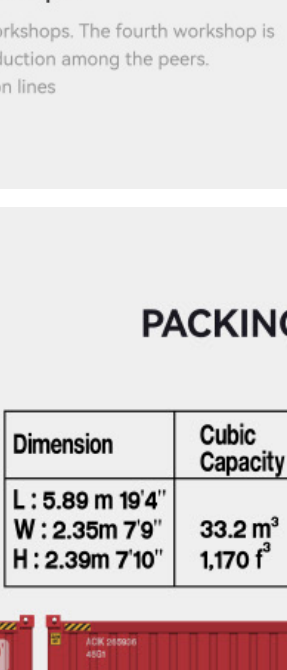


SGS Formaldehyde Test Report

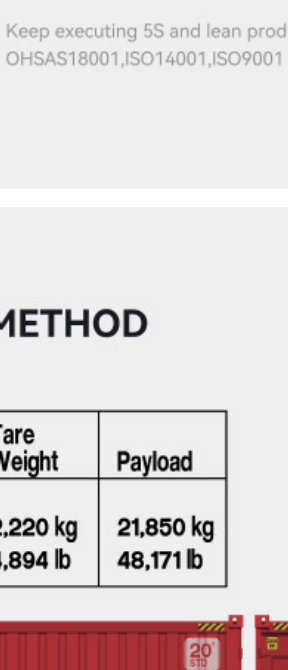


CE Eu Safety Certification

FACTORY STRENGTH

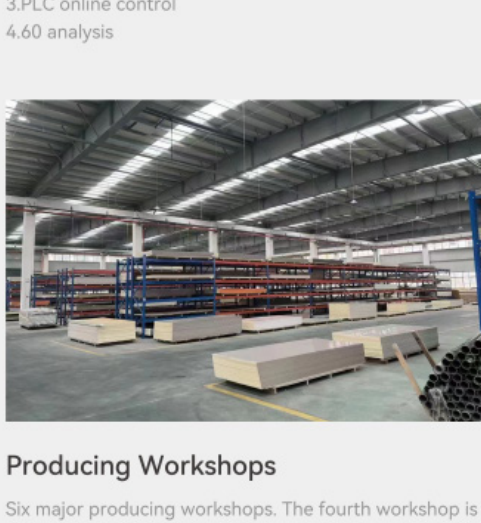


Mature Technology

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 6D analysis

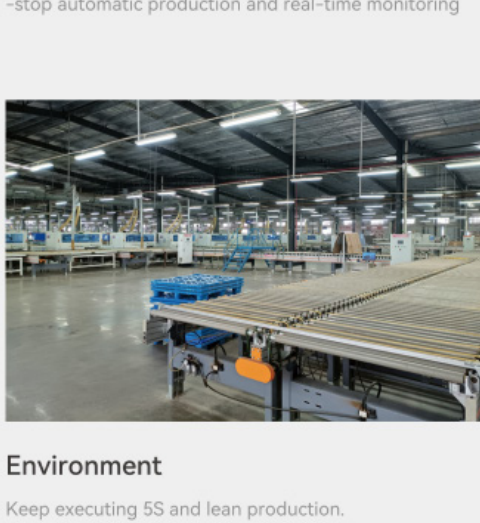


Equipment Operation

1. Famous brands, professional maintenance
2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

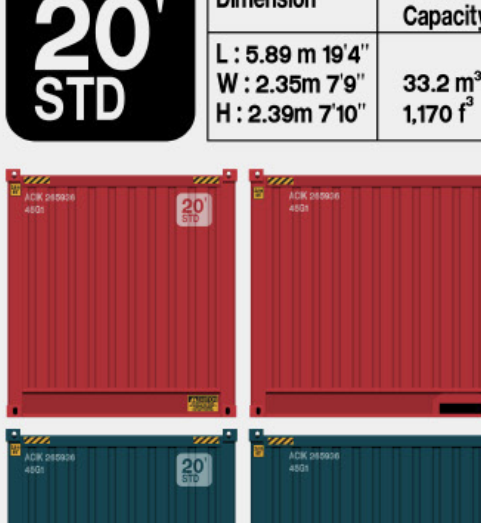

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers. 20 intelligent production lines

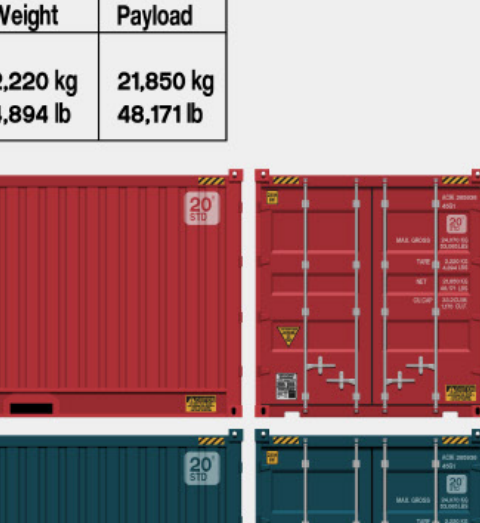

Environment

Keep executing 5S and lean production. OHSAS18001, ISO14001, ISO9001

PACKING METHOD



20'正常装货货柜尺寸



40'正常装货货柜尺寸