



- CLOTH GRAIN -

**6001**  
COLOR NUMBER




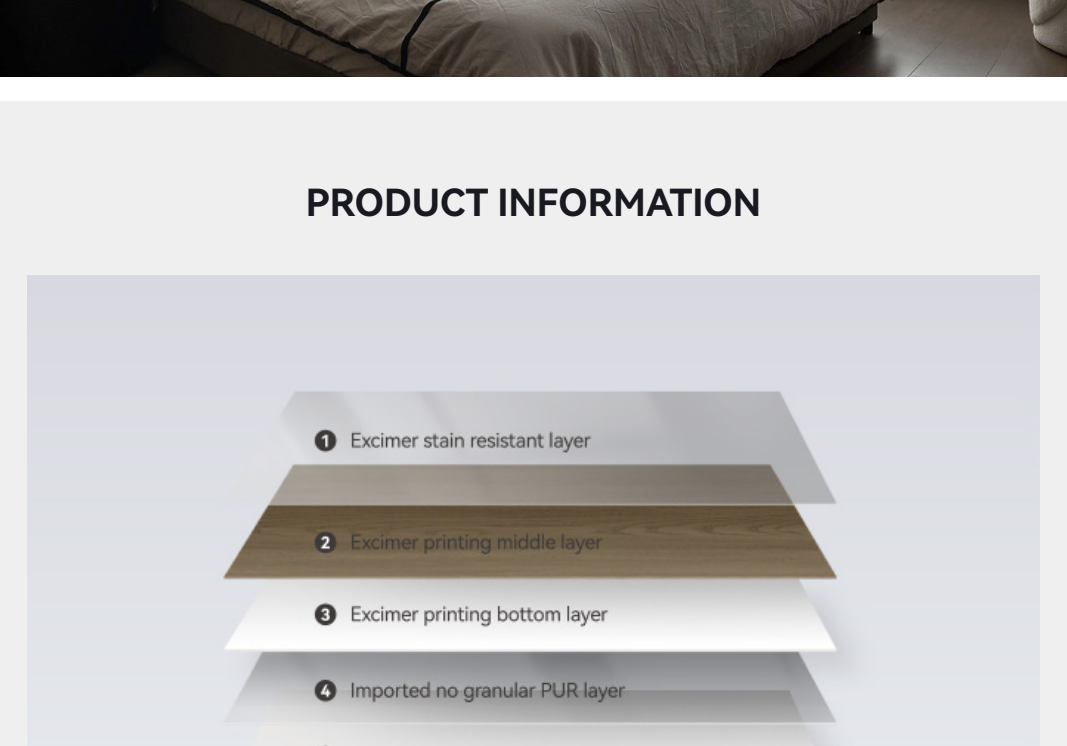


## PRODUCT INFORMATION




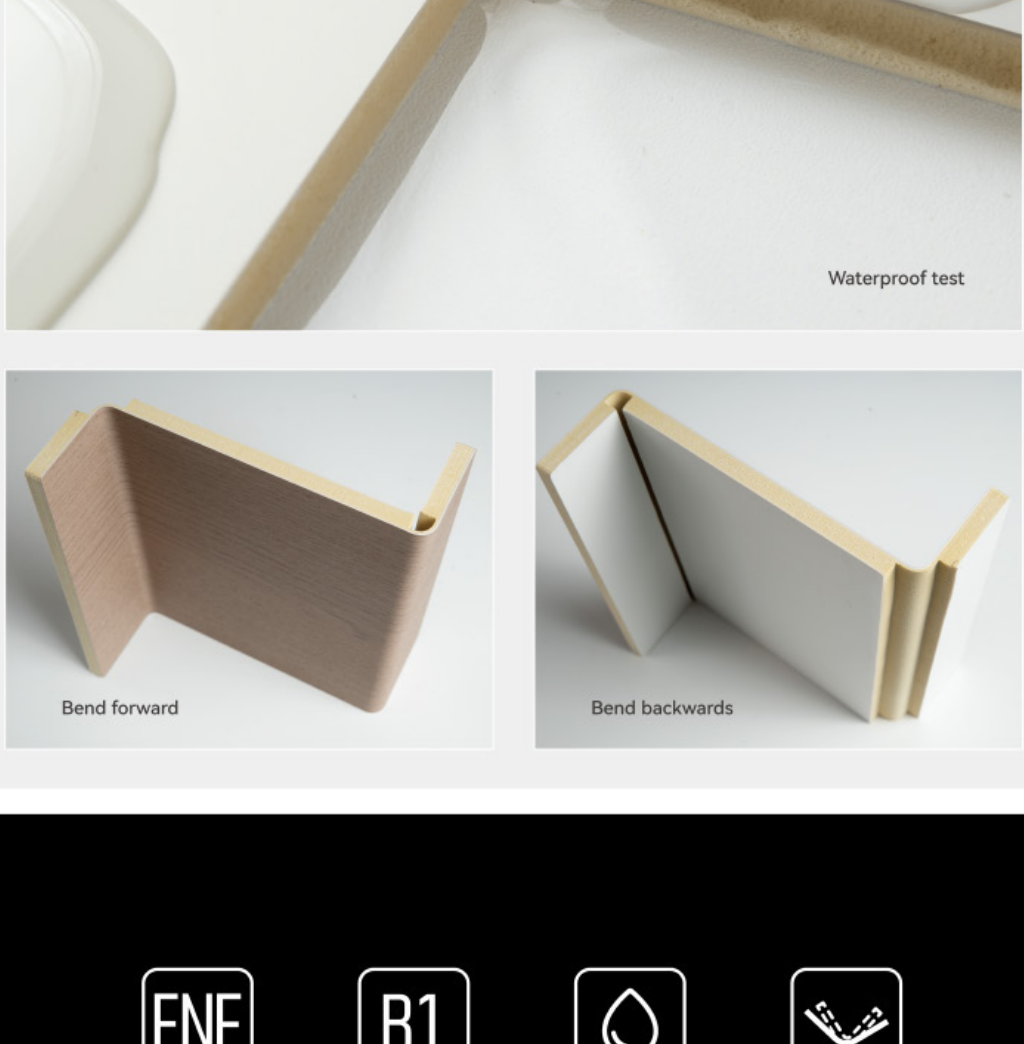


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer-Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile/ connection/ process seam




## PRODUCT PERFORMANCE REAL SHOT

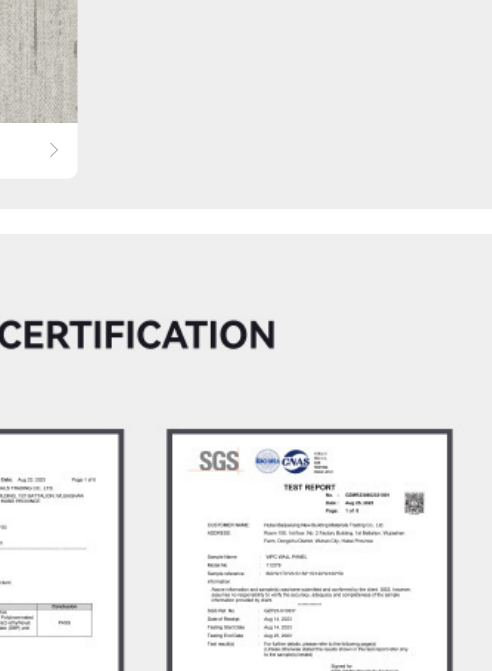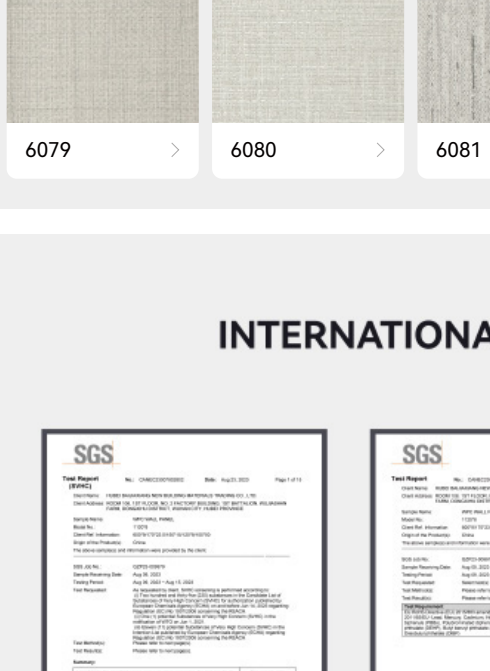


## MORE CLOTH GRAIN COLORS

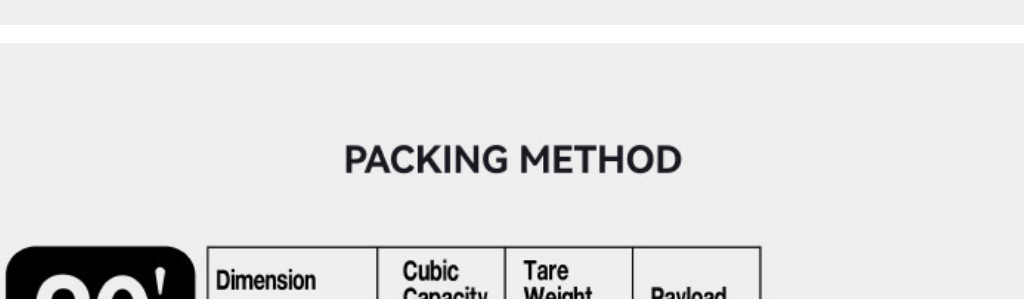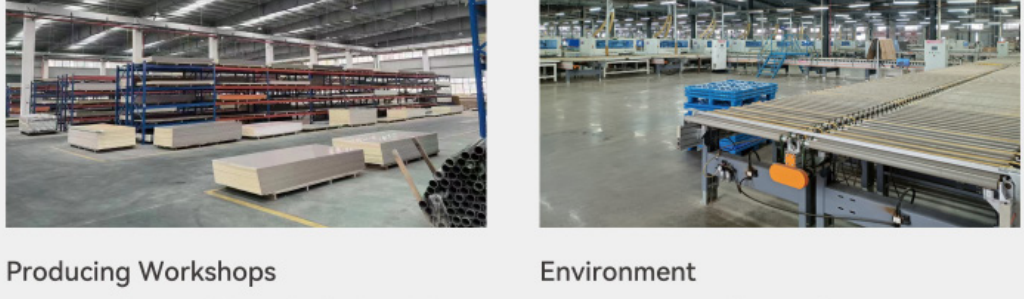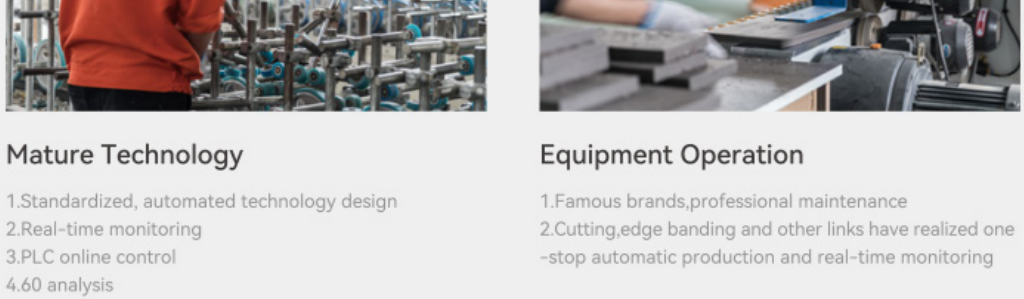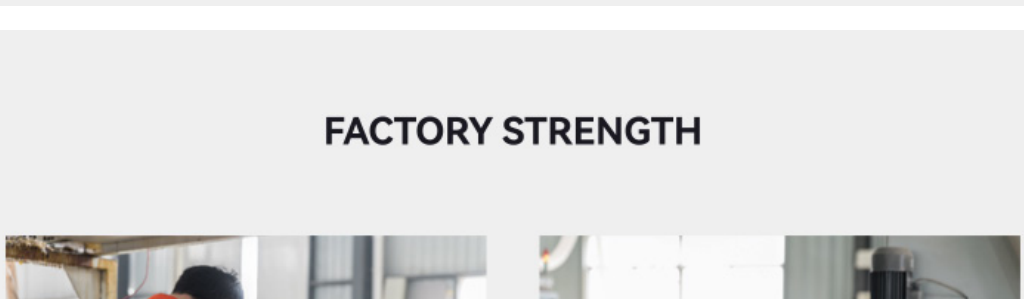


## INTERNATIONAL CERTIFICATION

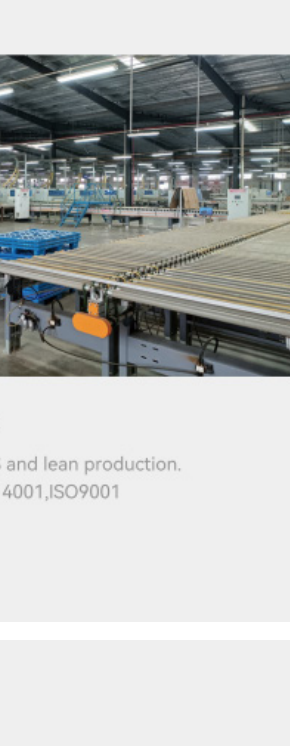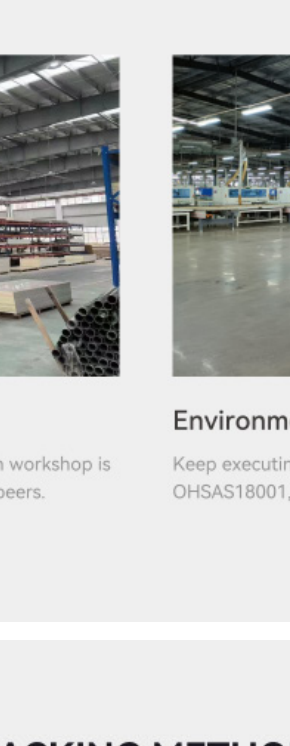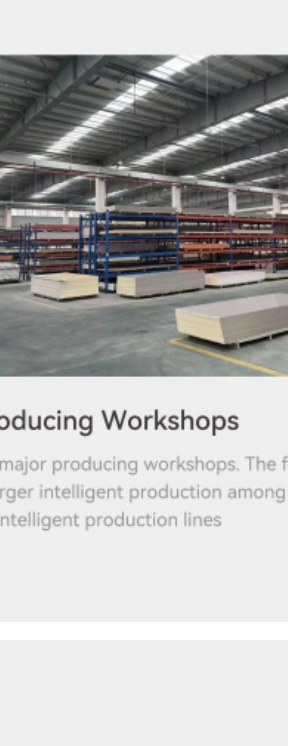


Environmental Test Report



EU Highly Concerned Substance Report



Flame Retardant Test Report


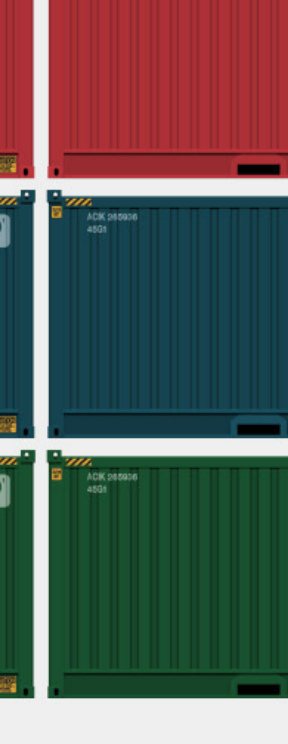


Formaldehyde Test Report



Eu Safety Certification

## FACTORY STRENGTH

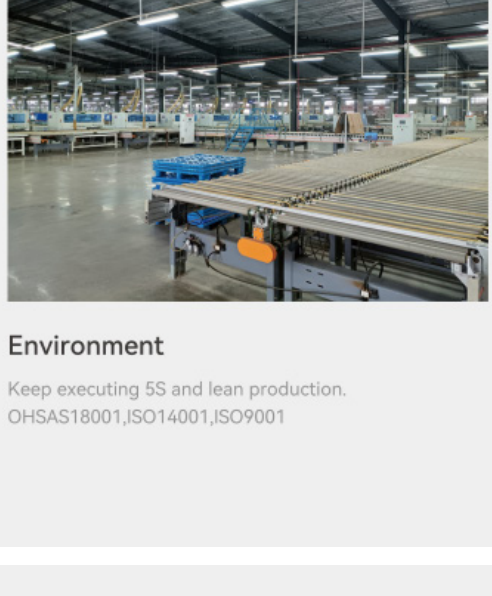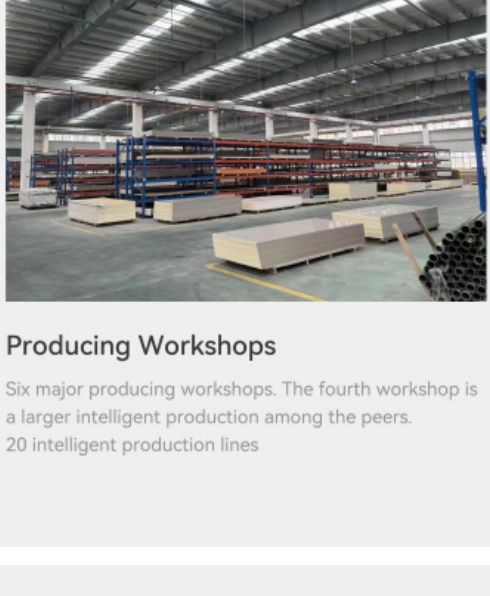

### Mature Technology

1.Standardized, automated technology design

2.Real-time, automated

3.PLC online control


4.6D analysis

### Equipment Operation

1.Famous brands,professional maintenance

2.Cutting,edge banding and other links have realized one

-stop automatic production and real-time monitoring

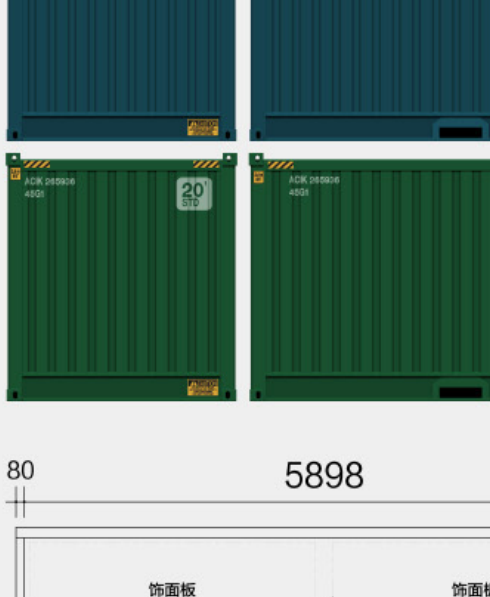

### Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines



### Environment

Keep executing 5S and lean production.

OHSAS18001,ISO14001,ISO9001

## PACKING METHOD

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 5.89 m 19'4"			
	W : 2.35m 7'9"	33.2 m³	2,220 kg	21,850 kg
	H : 2.39m 7'10"	1,170 f³	4,894 lb	48,171 lb



20正常装货货柜尺寸



40正常装货货柜尺寸