

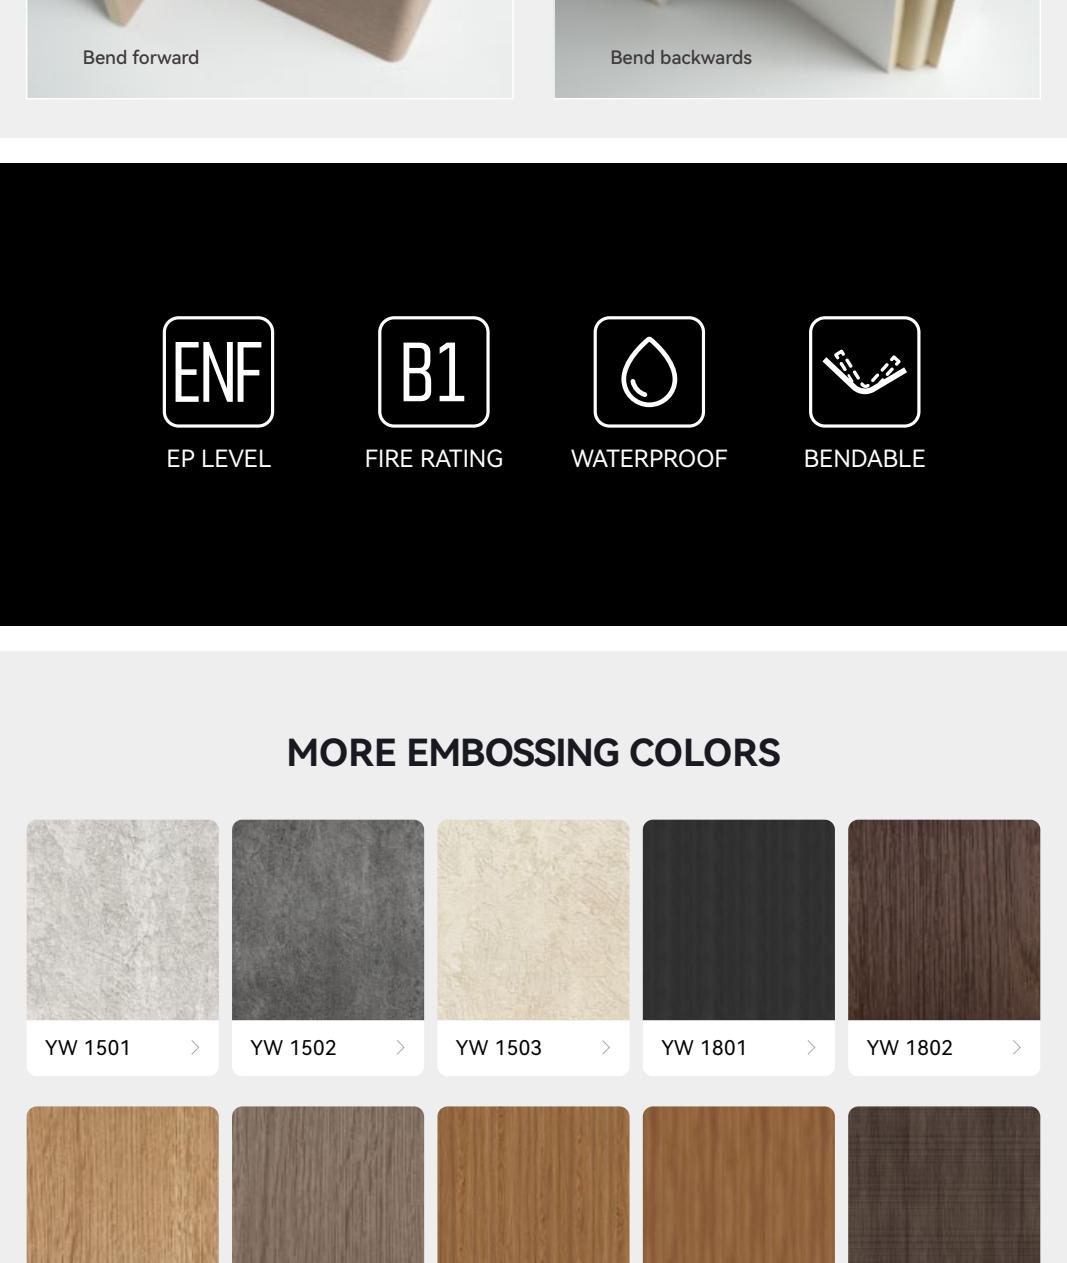
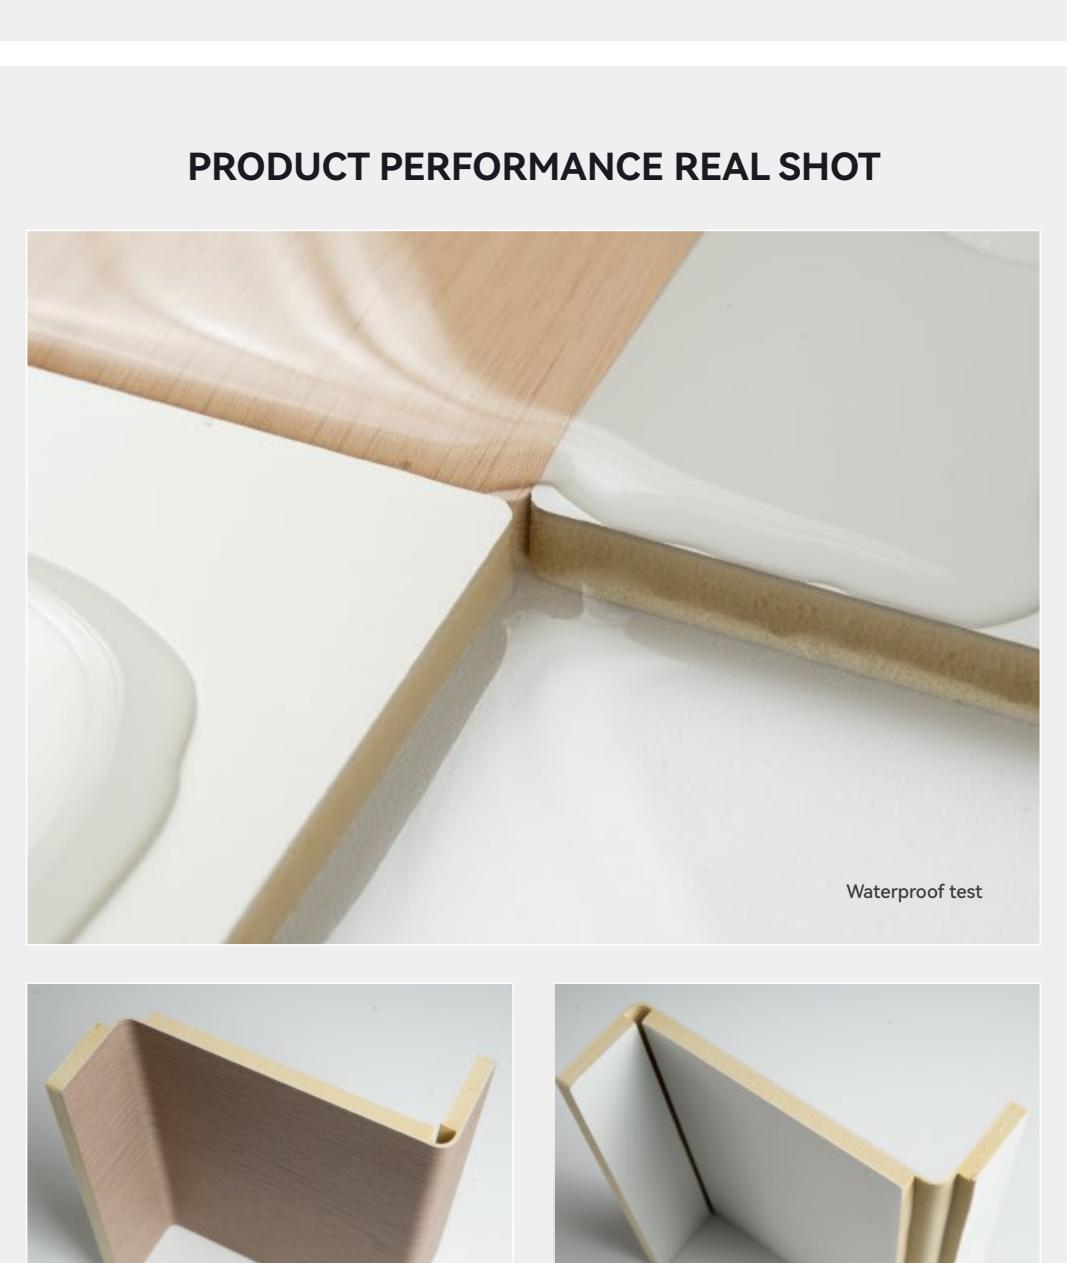


YW 1802

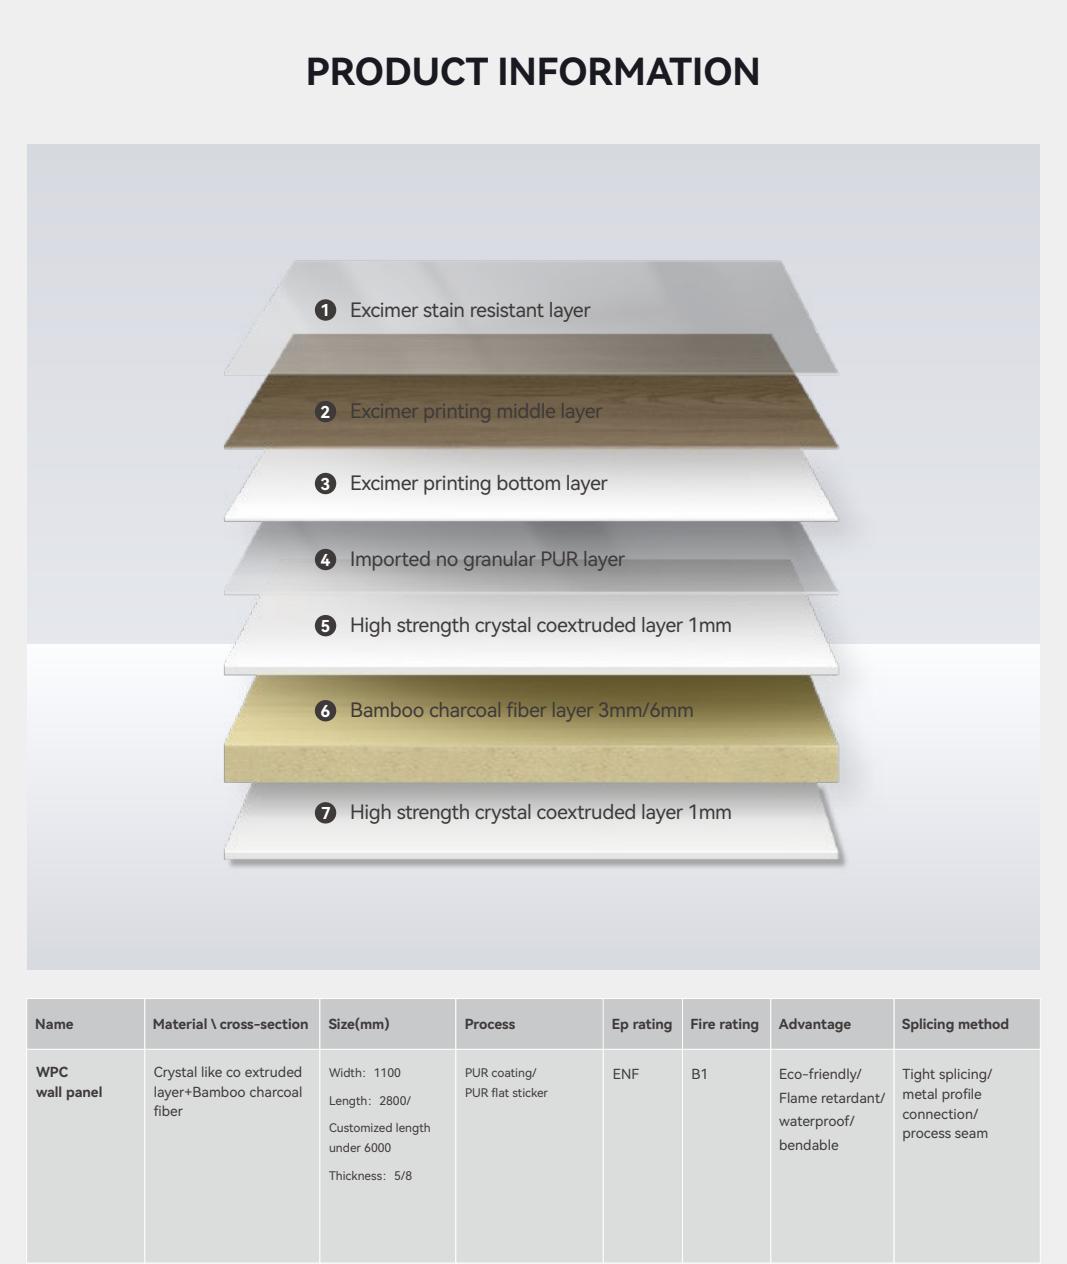


PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

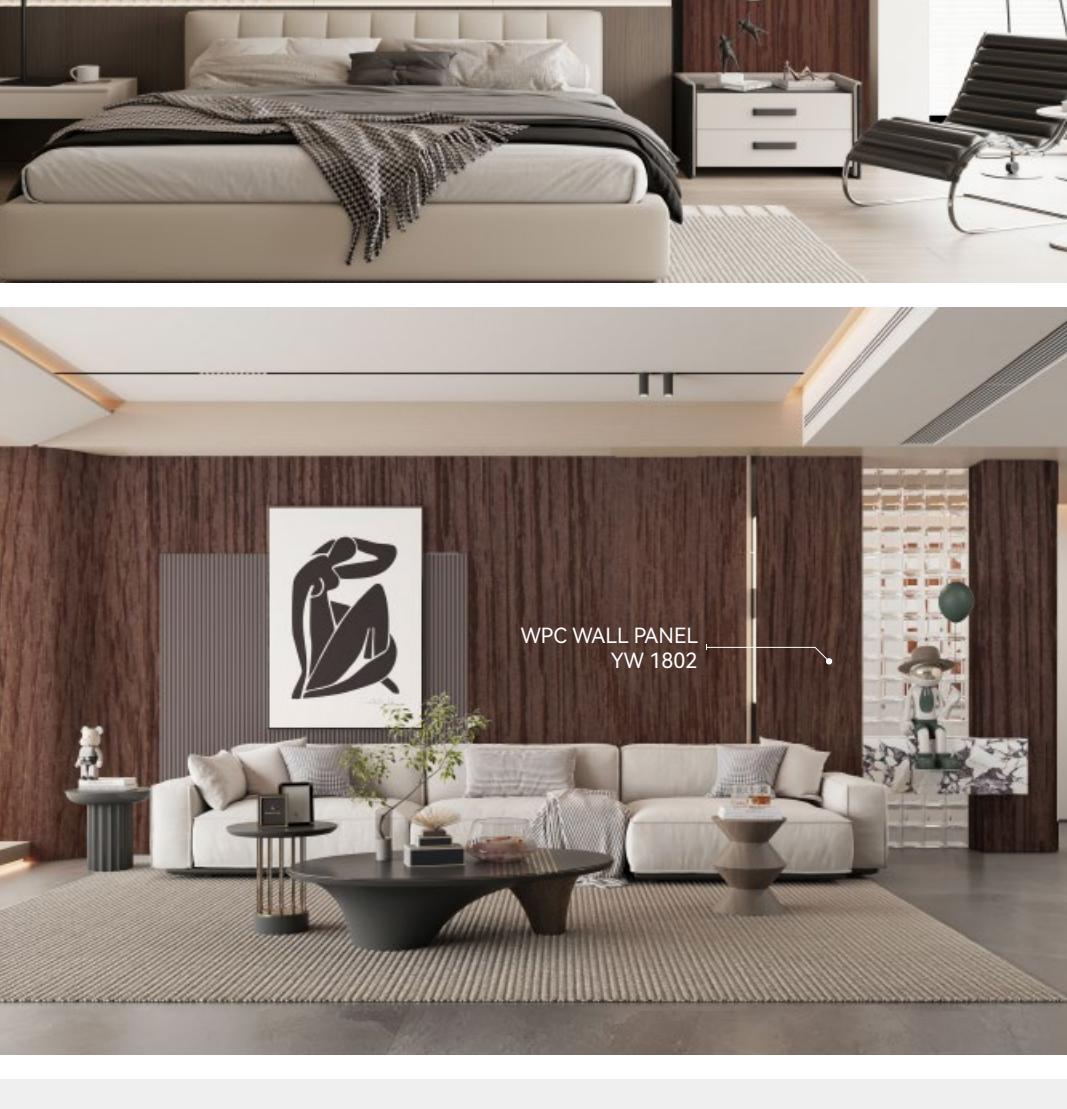

PRODUCT INFORMATION

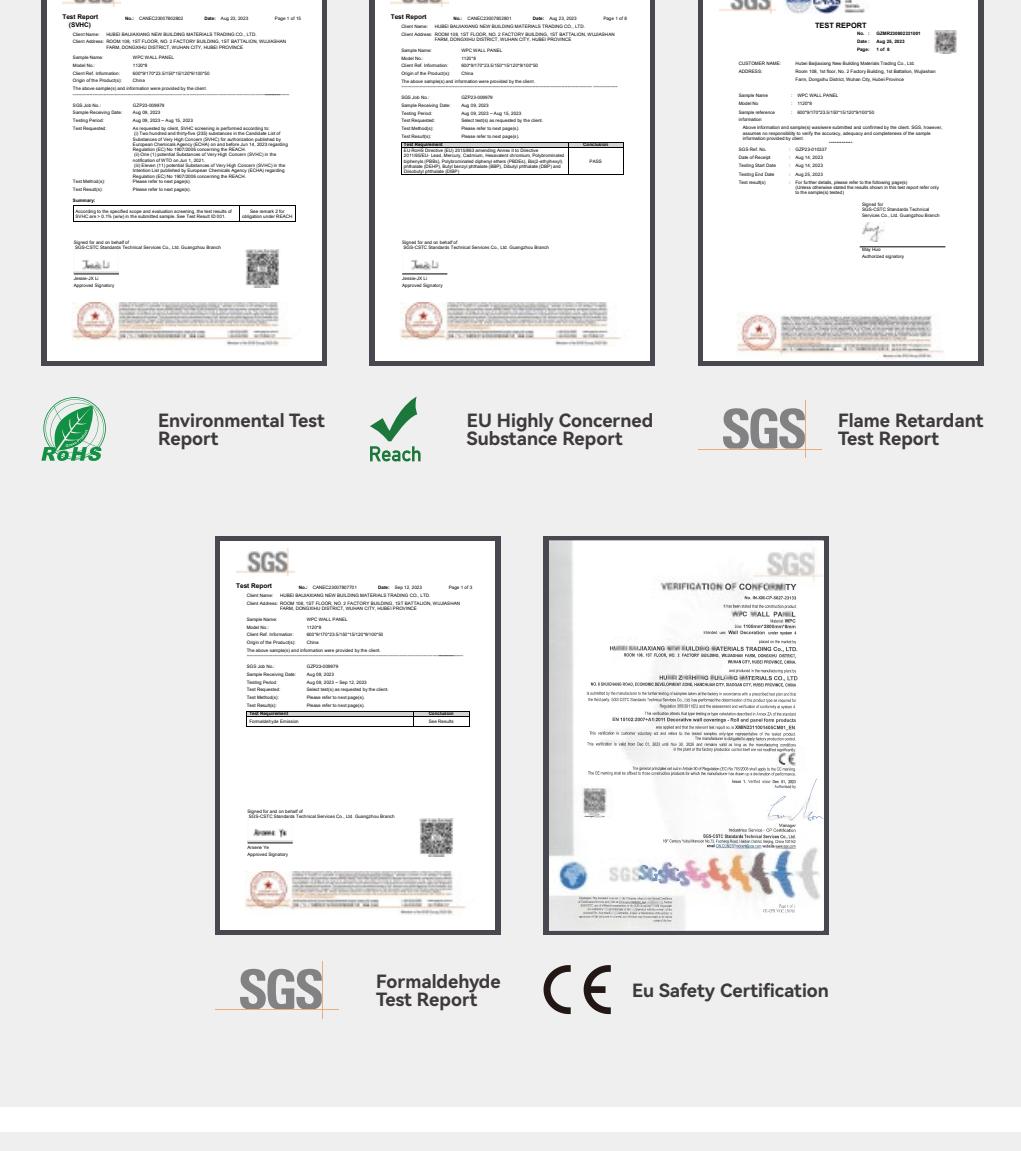

Name	Material/cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

20' STD

Dimension

Cubic Capacity

Tare Weight


Payload

L : 5.89m 19'4"
W : 2.35m 7'9"
H : 2.39m 7'10"

33.2 m³
1,170 f³

2,220 kg
4,894 lb

21,850 kg
48,171 lb

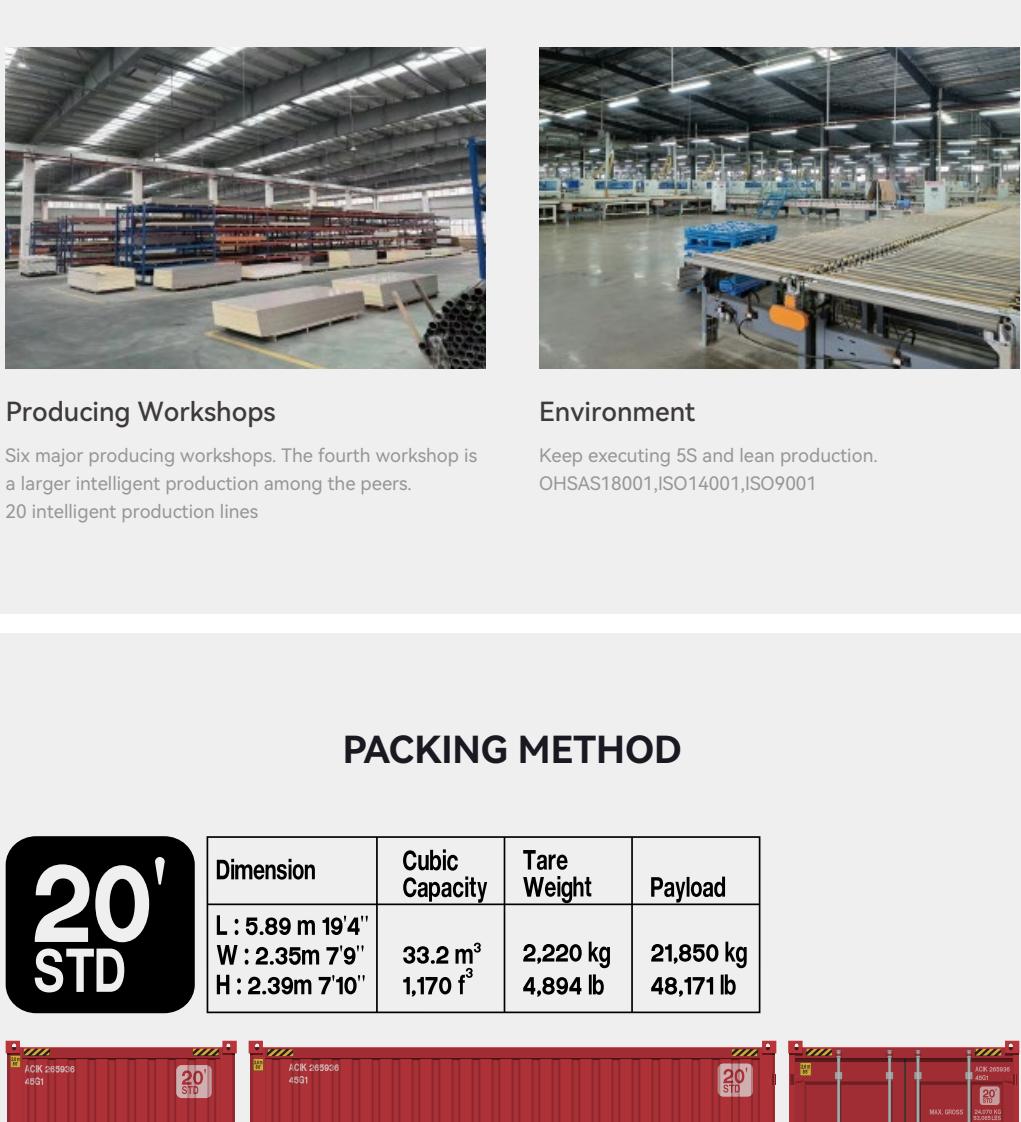

80	5898	80	43	2352	43
饰面板	托盘	饰面板	托盘	饰面板	托盘
托盘	托盘	托盘	托盘	托盘	托盘
饰面板	托盘	饰面板	托盘	饰面板	托盘

20正常装货柜尺寸

40' STD

Dimension

Cubic Capacity

Tare Weight


Payload

L : 12.03m 39'6"
W : 2.35m 7'9"
H : 2.39m 7'10"

67.7 m³
8,245 f³

3,740 kg
8,245 lb

26,760 kg
58,996 lb

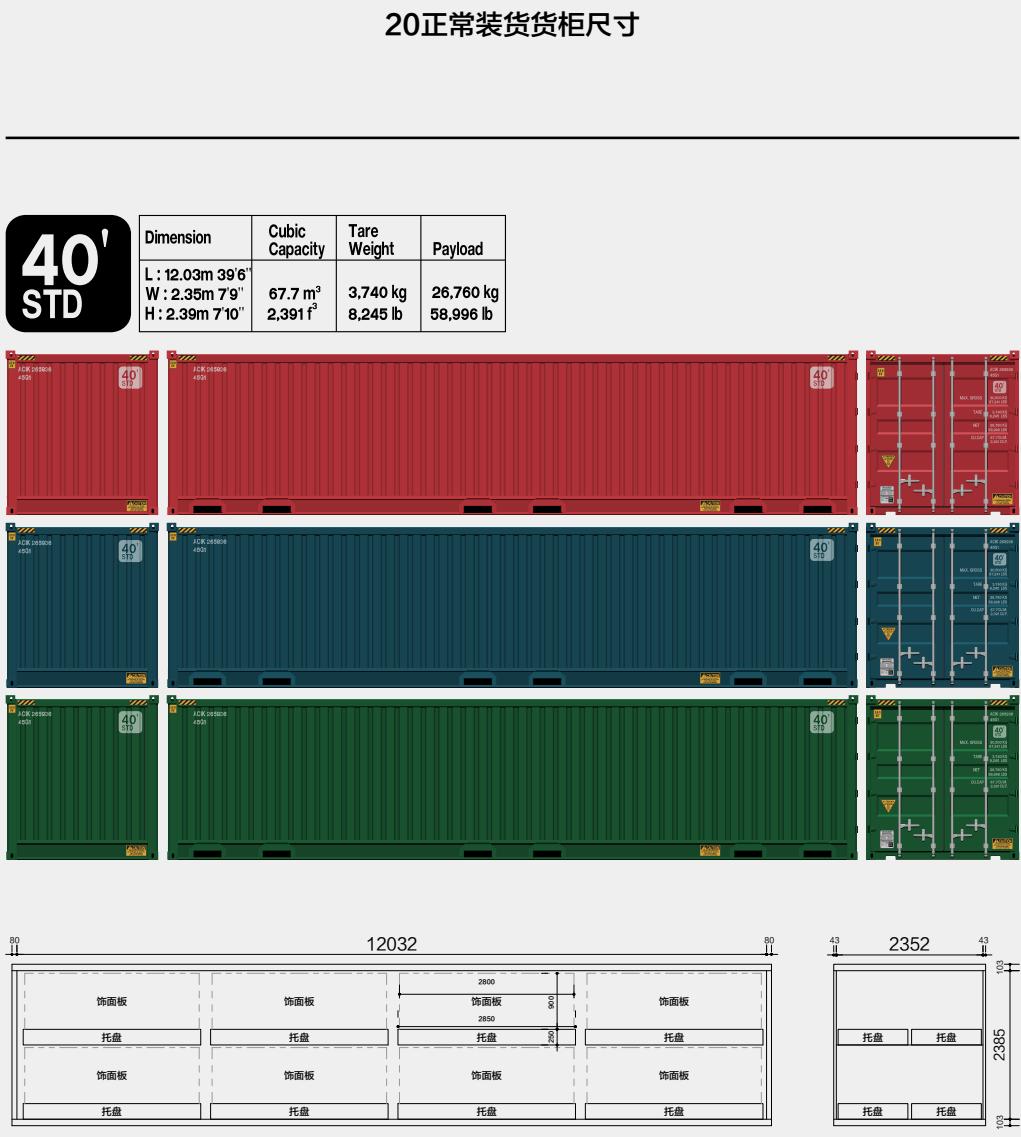

40正常装货柜尺寸

40' STD

Dimension

Cubic Capacity

Tare Weight

Payload

L : 12.03m 39'6"
W : 2.35m 7'9"
H : 2.39m 7'10"

67.7 m³

3,740 kg

26,760 kg

40正常装货柜尺寸