

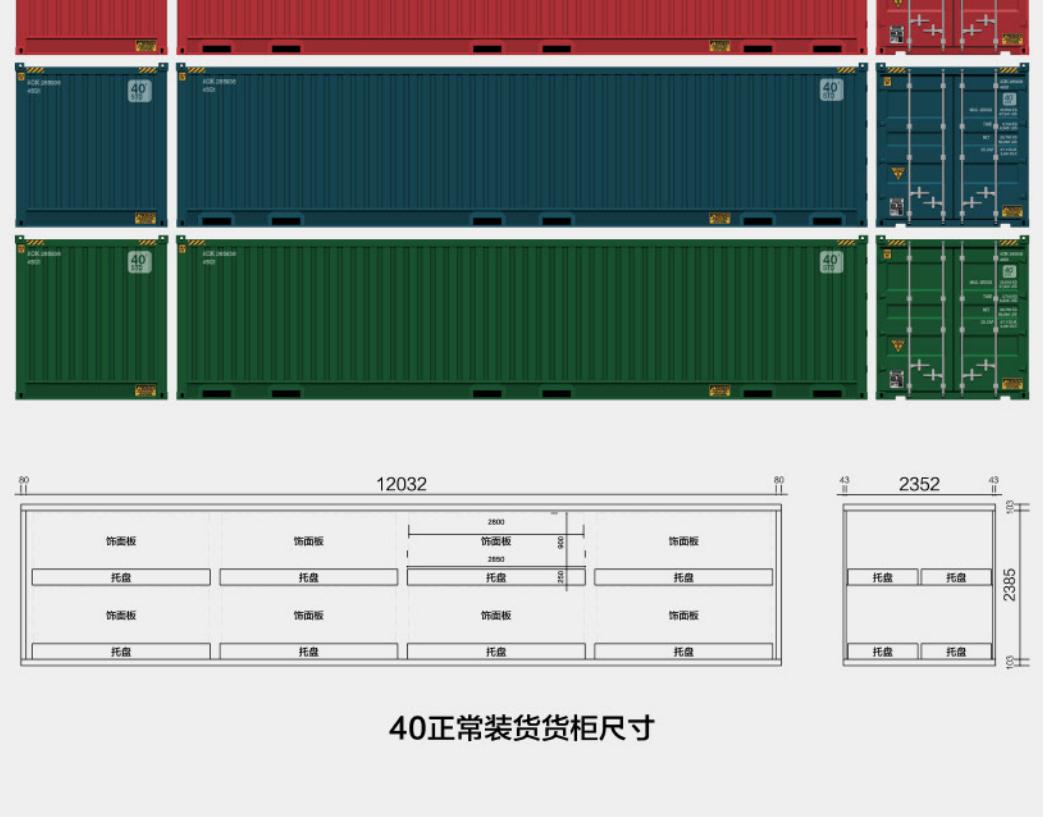
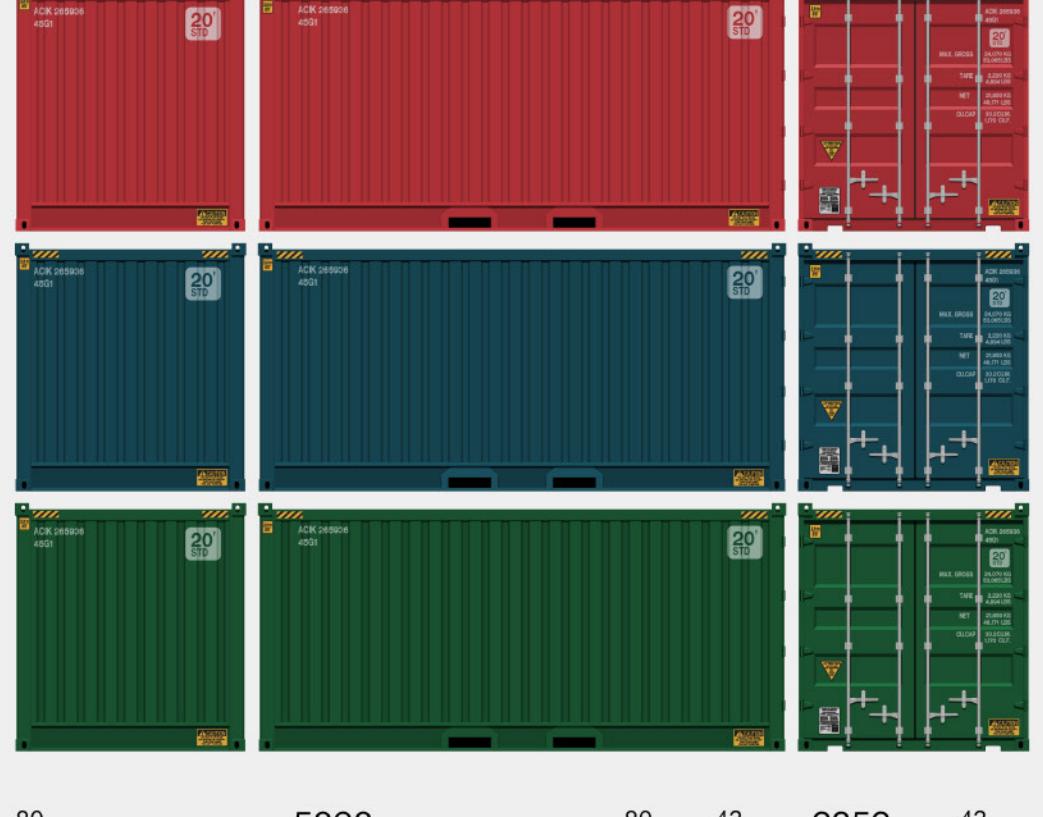
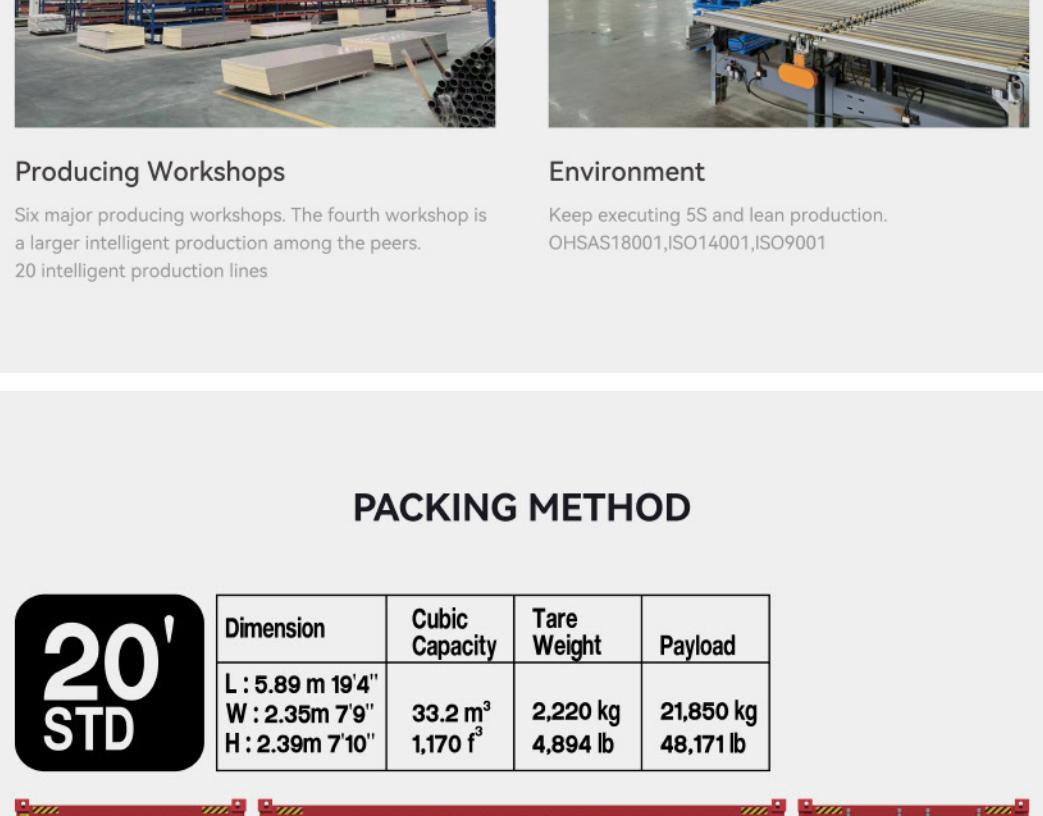
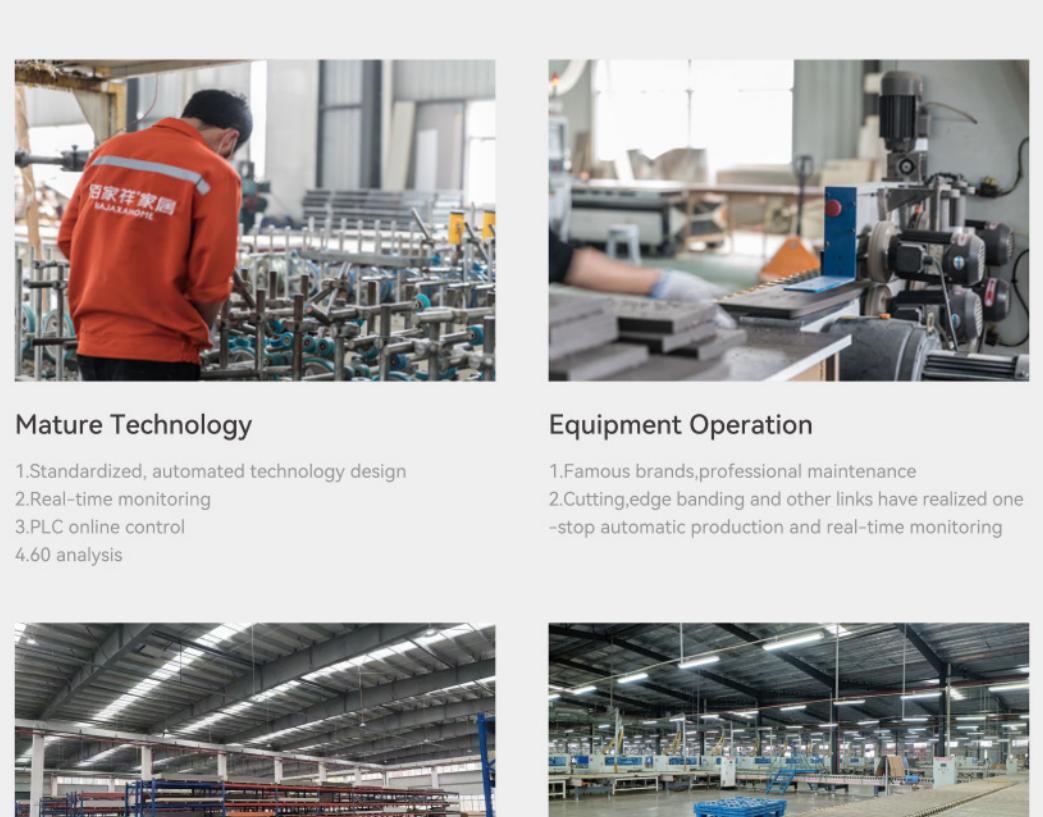
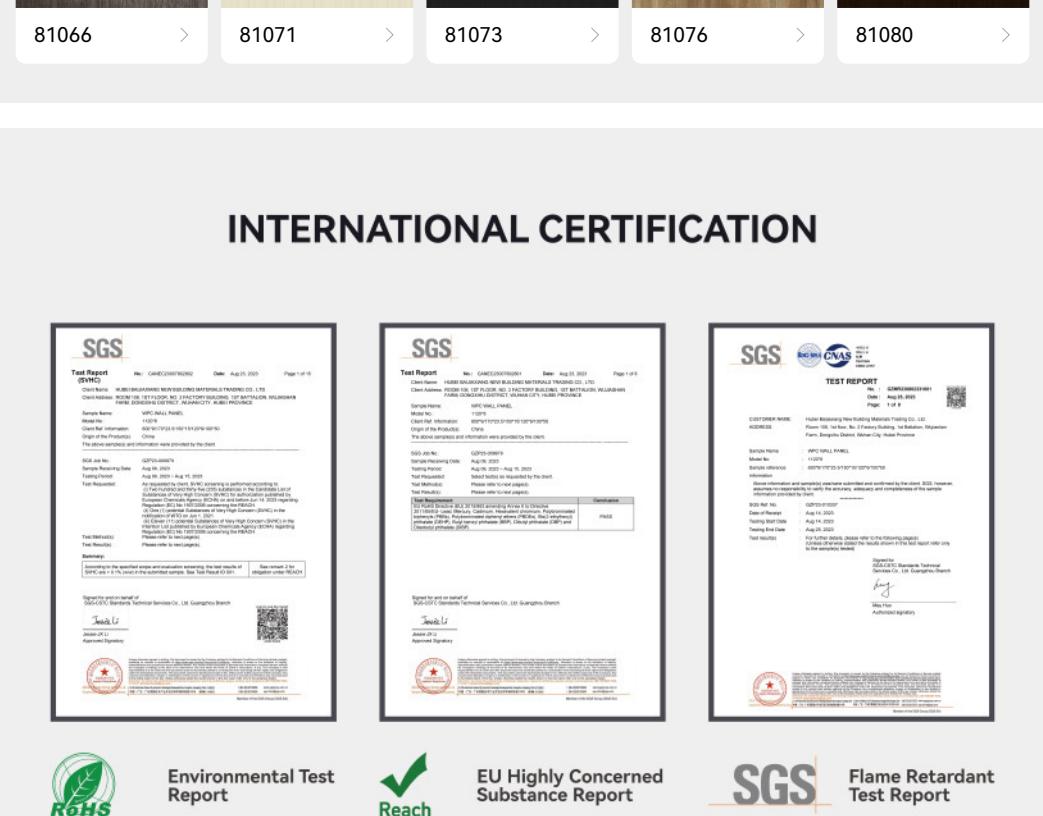
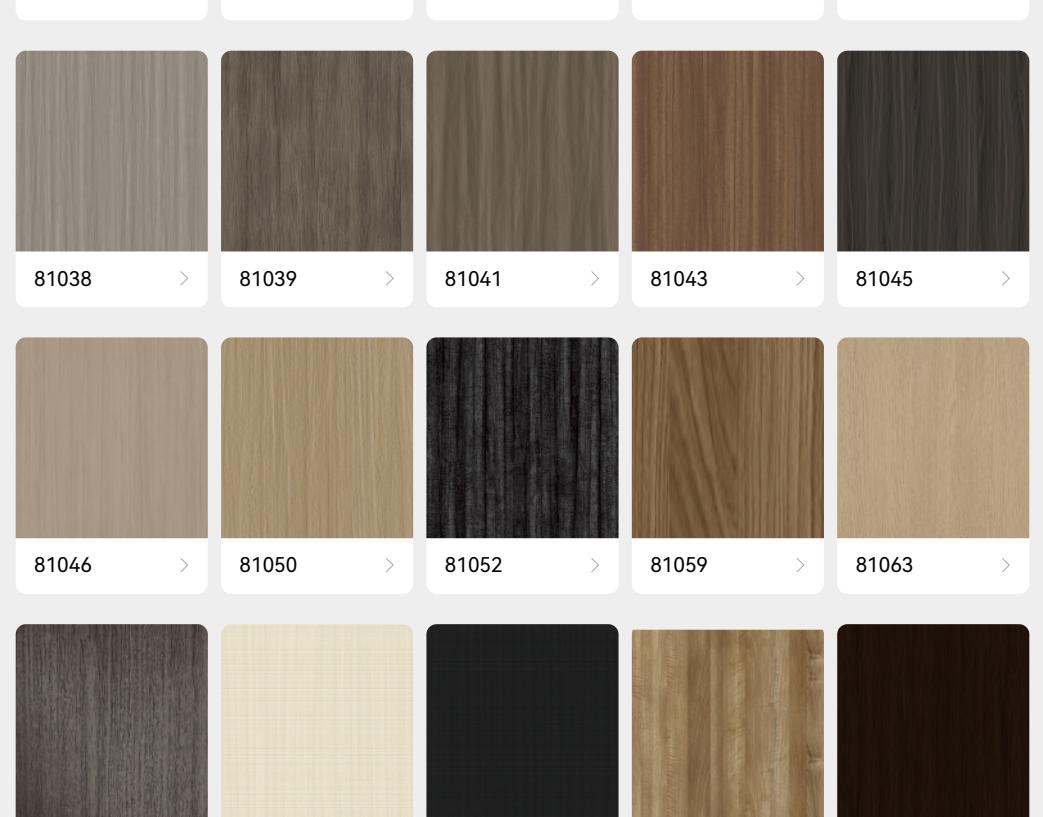
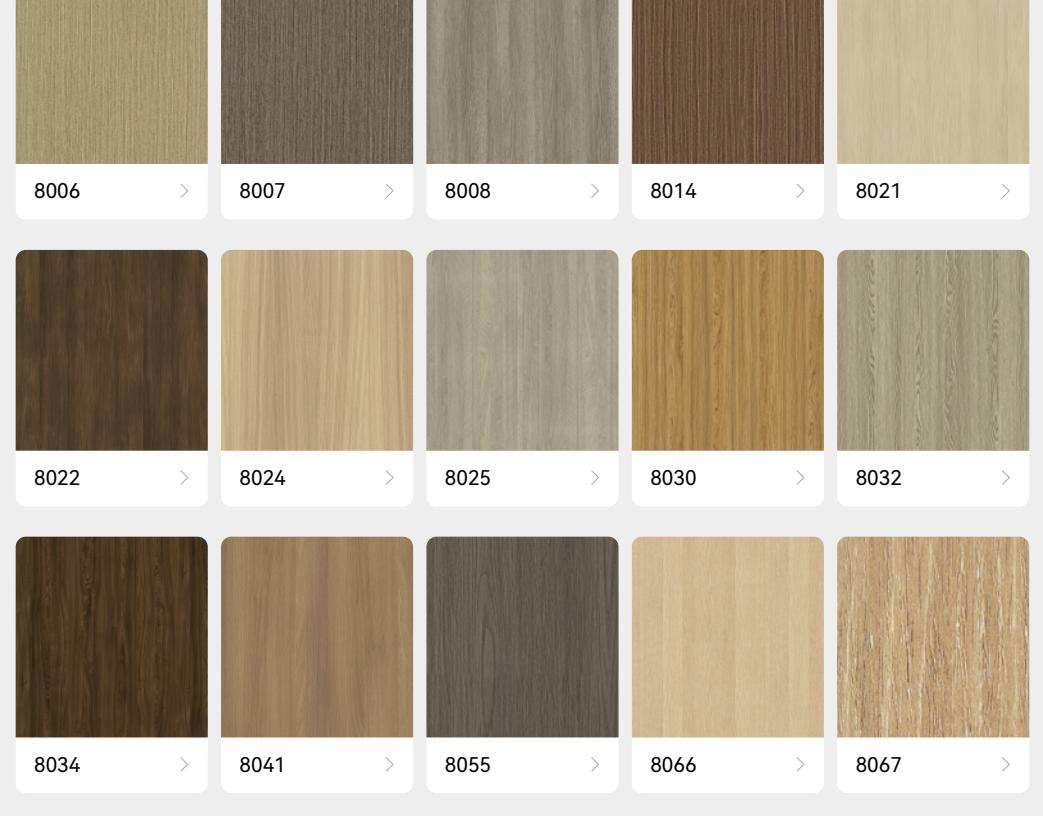
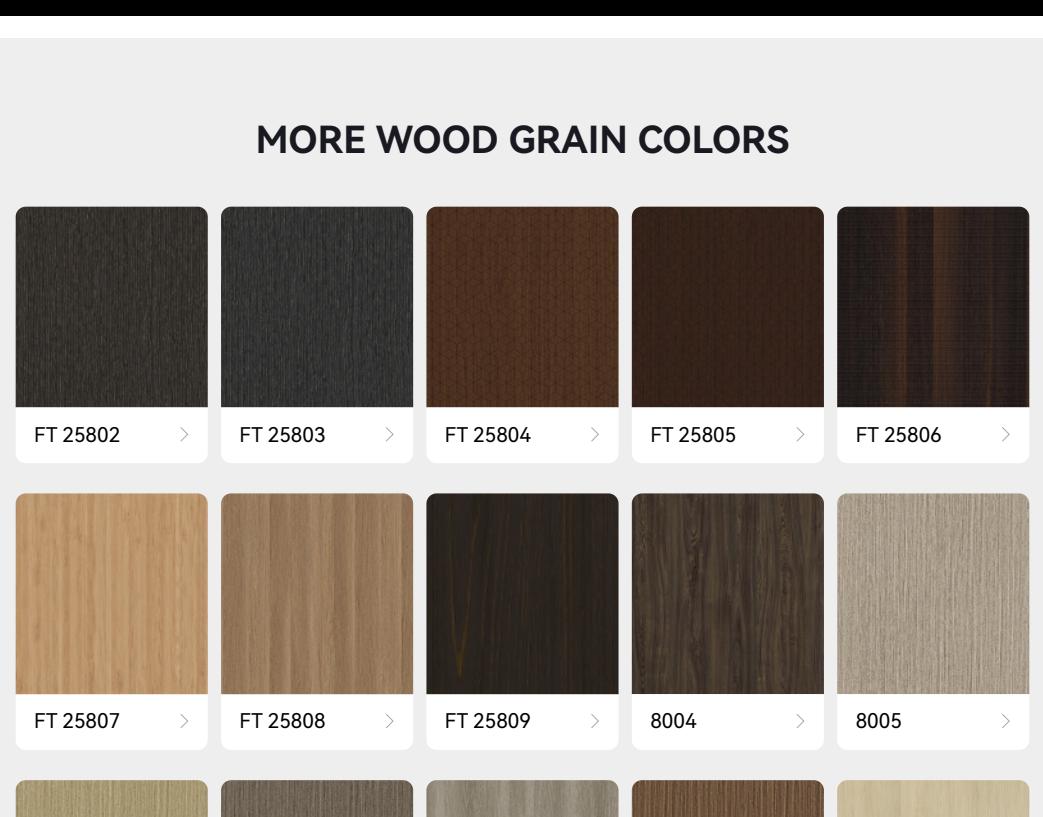


- WOOD GRAIN -












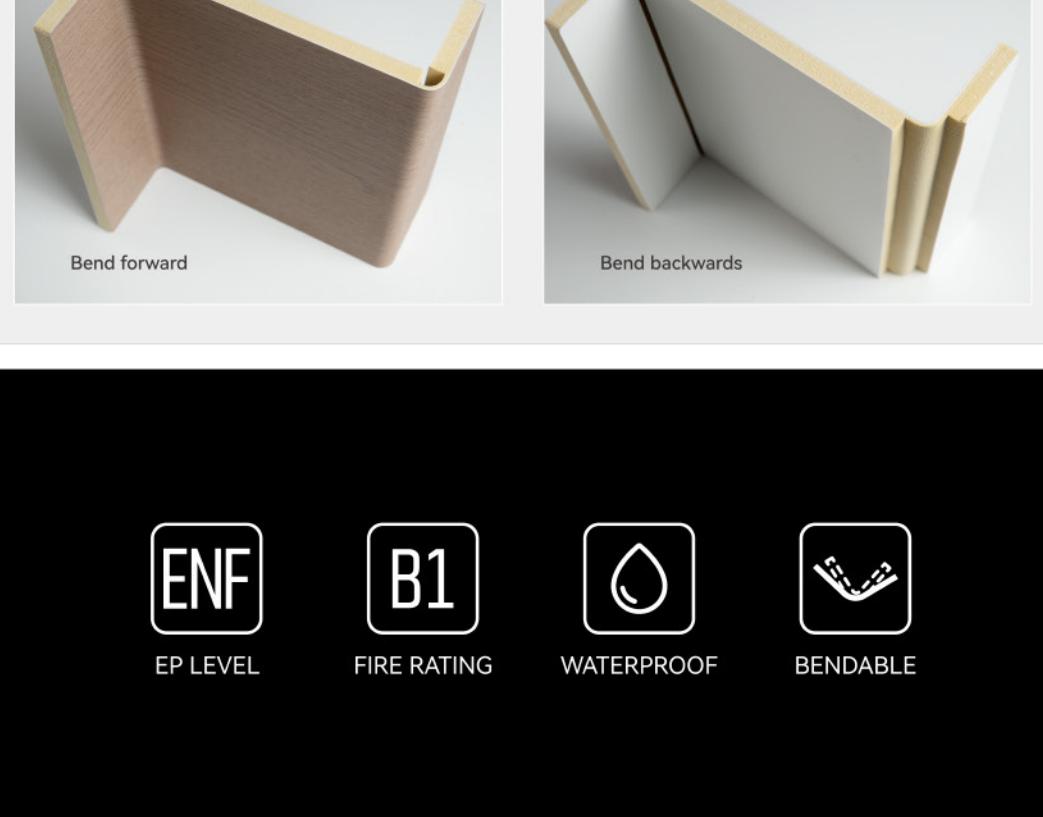


PRODUCT INFORMATION

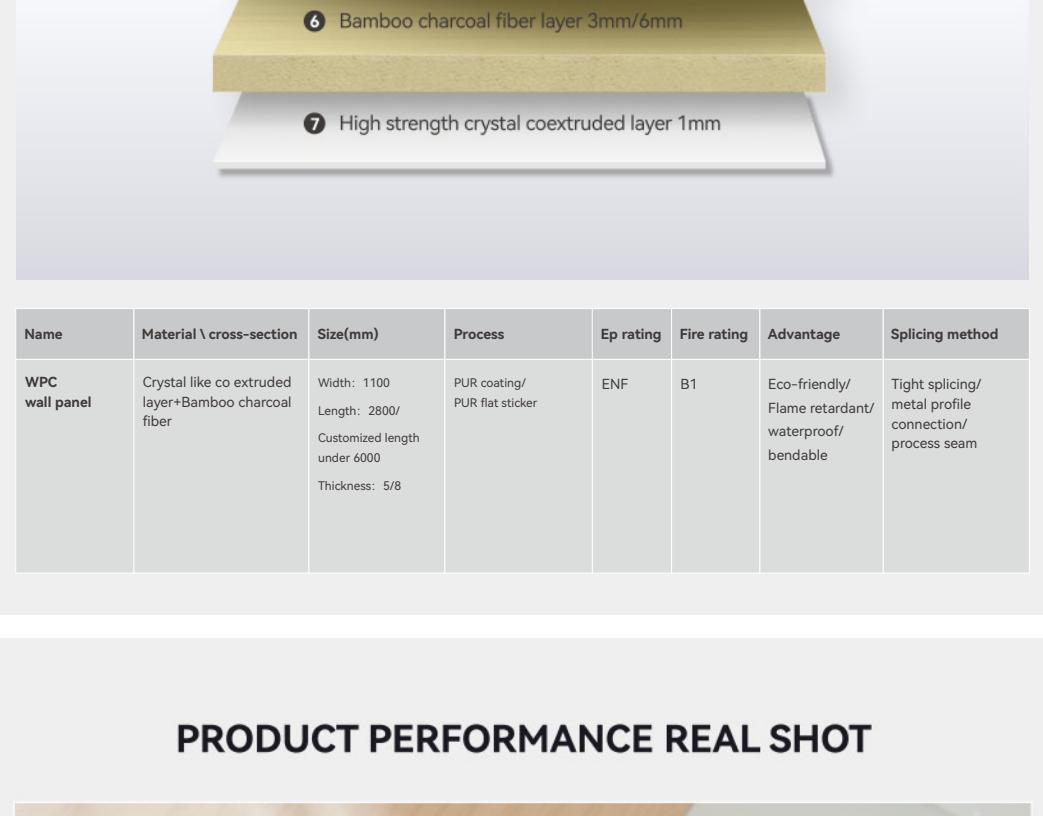

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile/ process seam

PRODUCT PERFORMANCE REAL SHOT

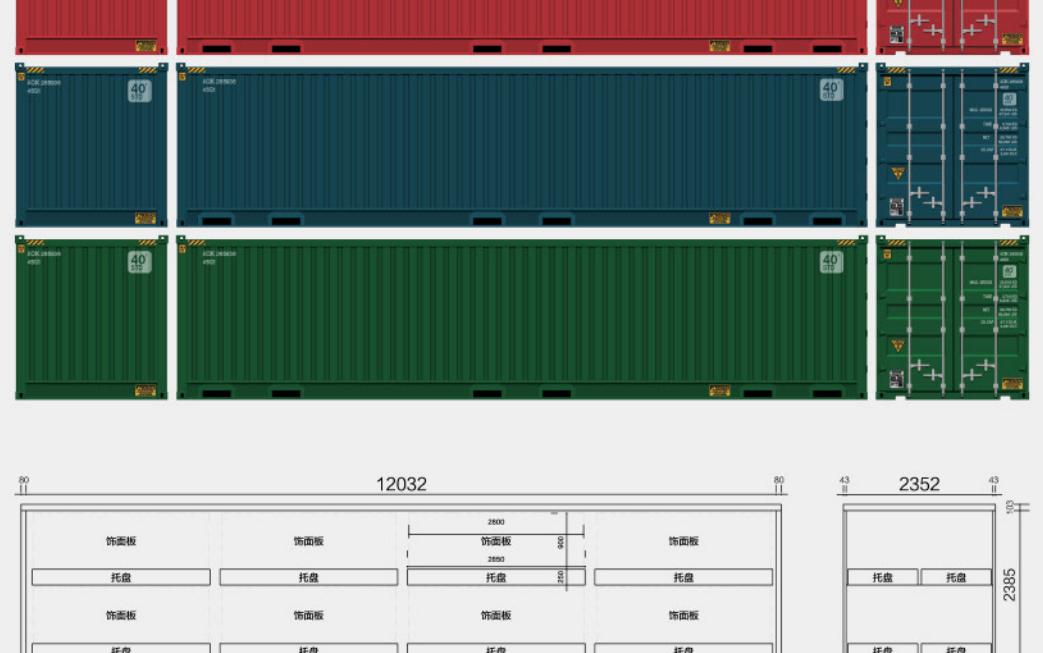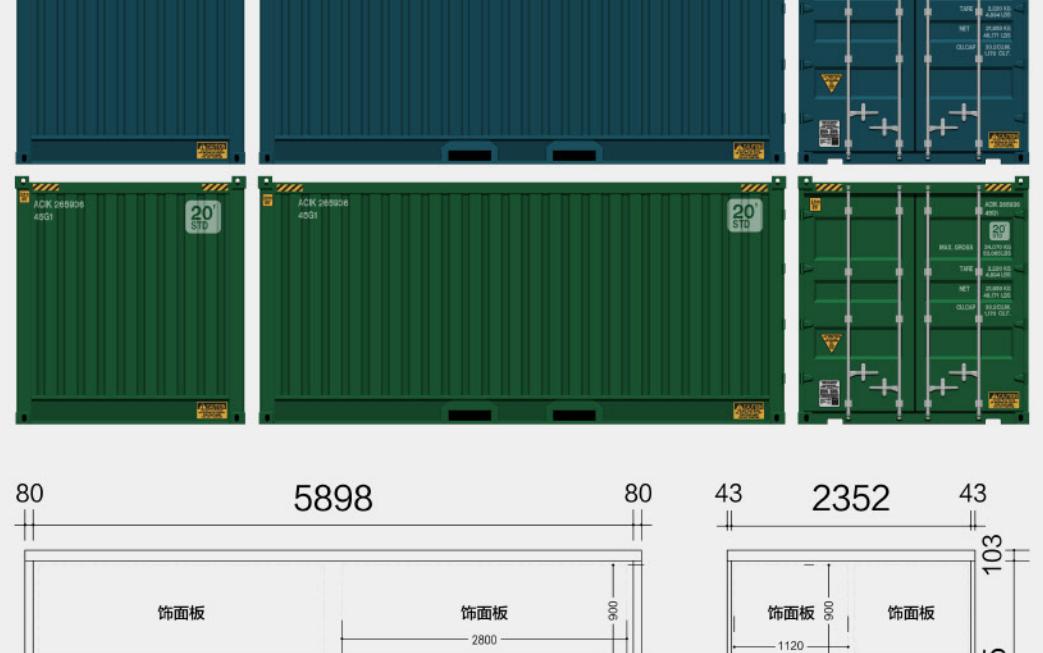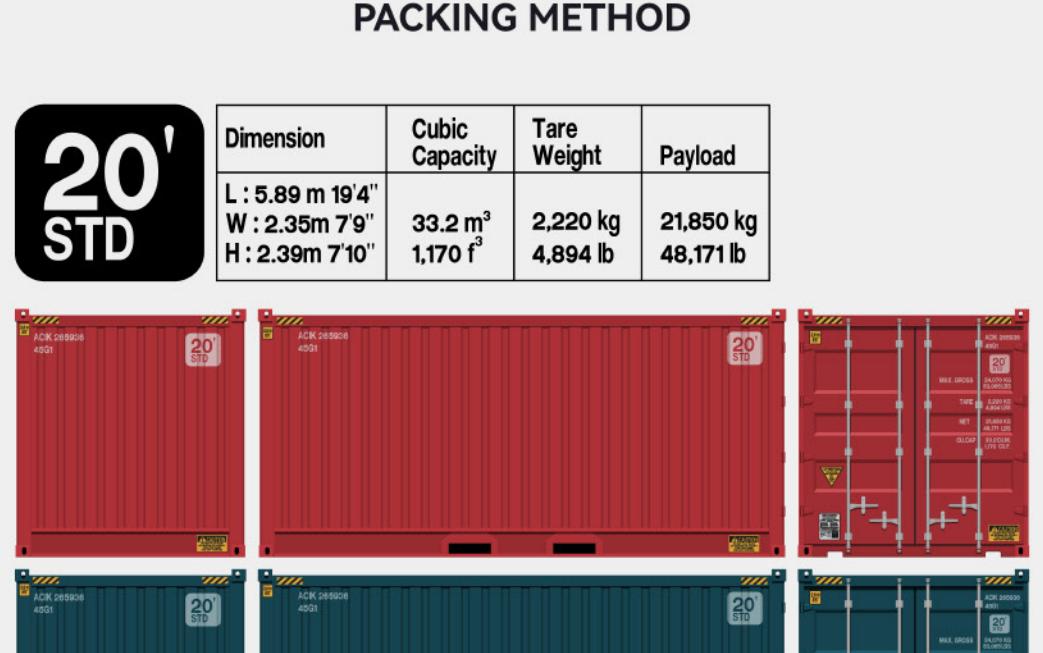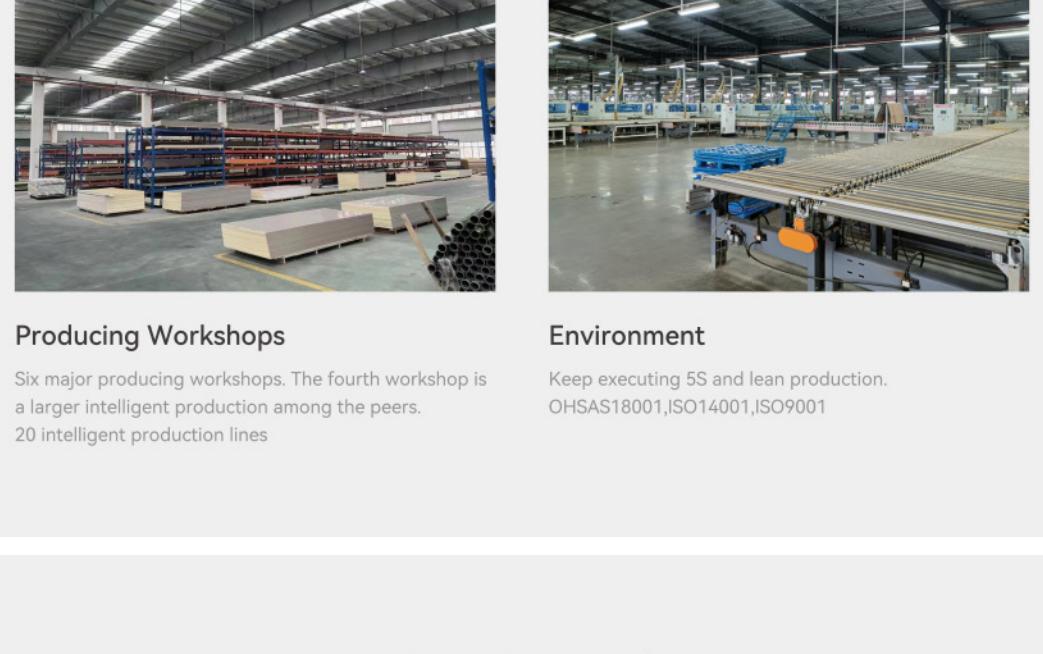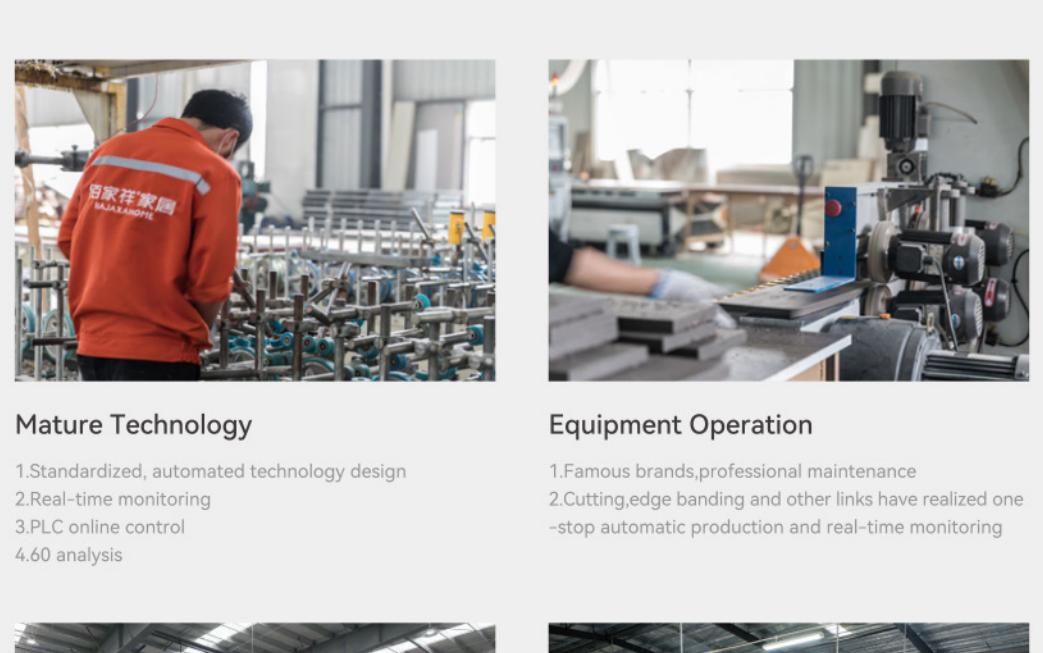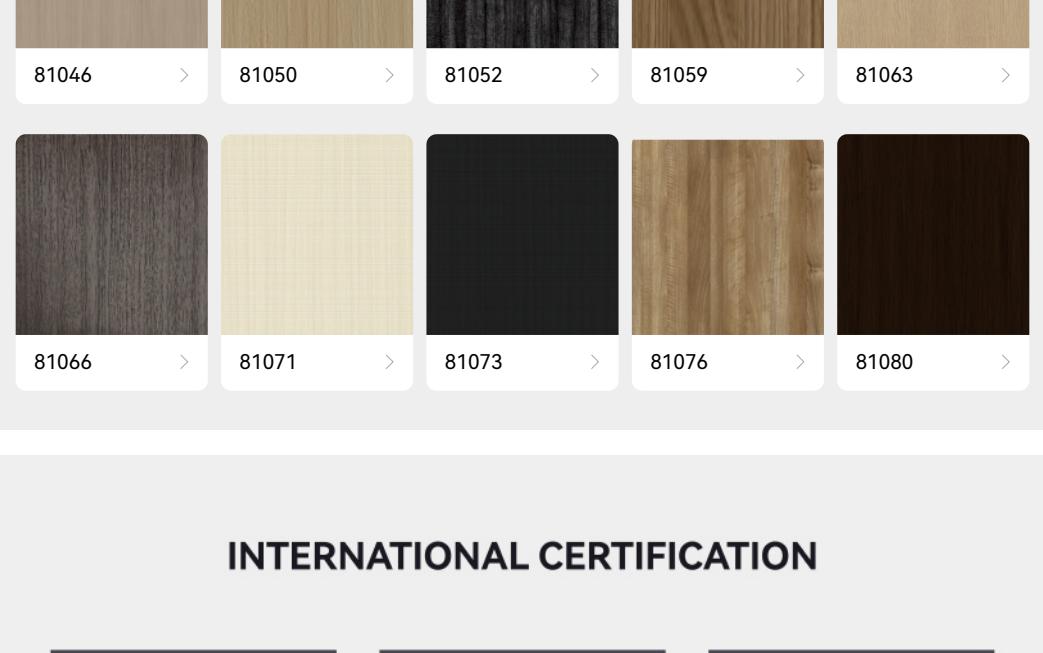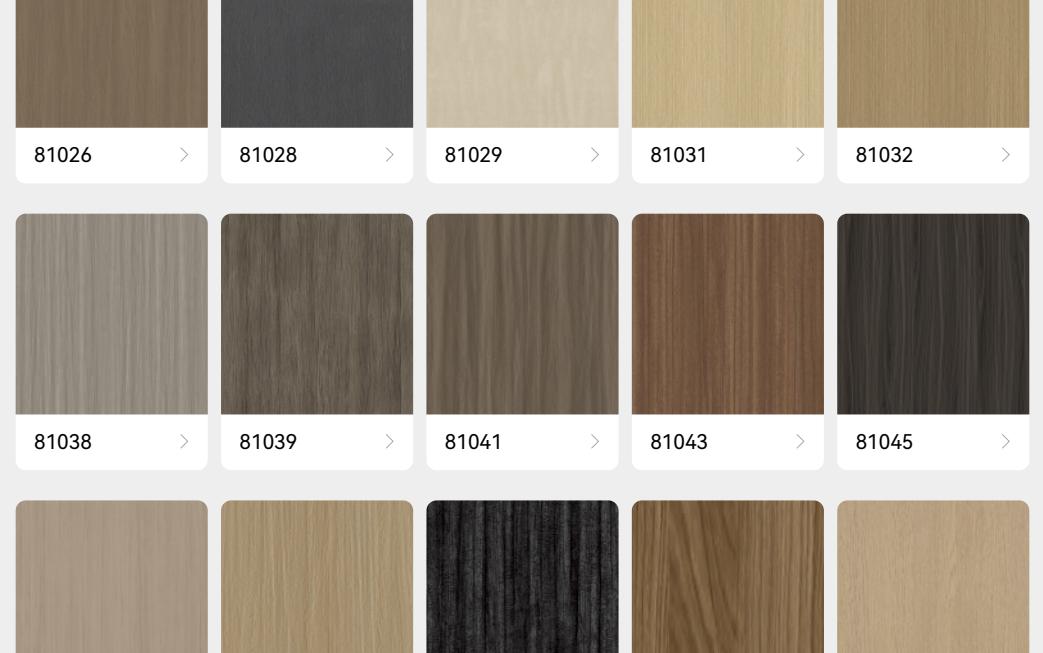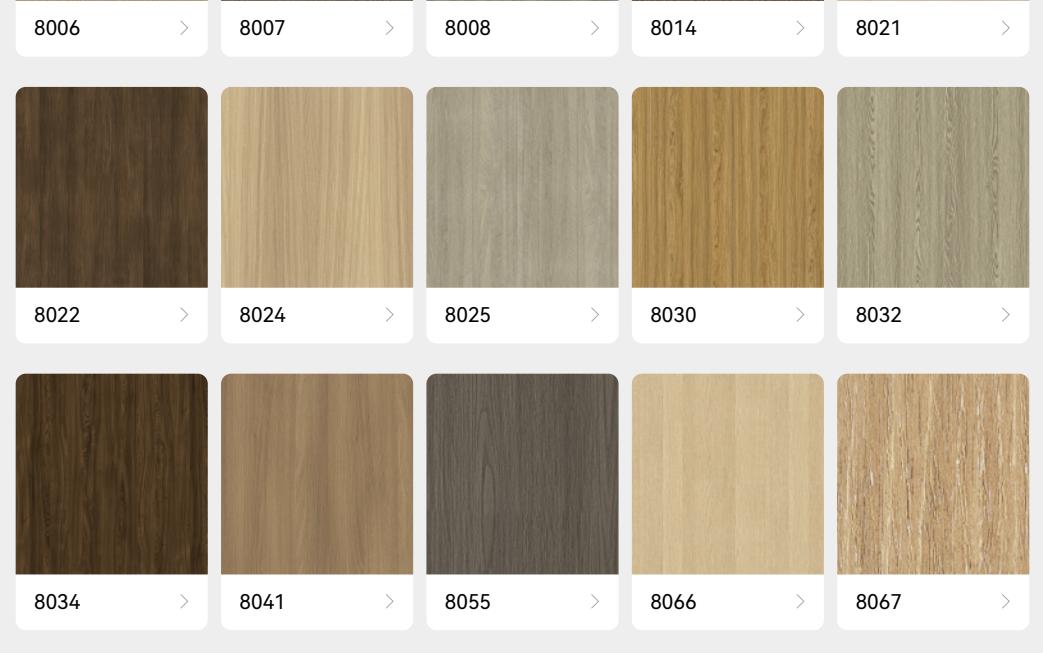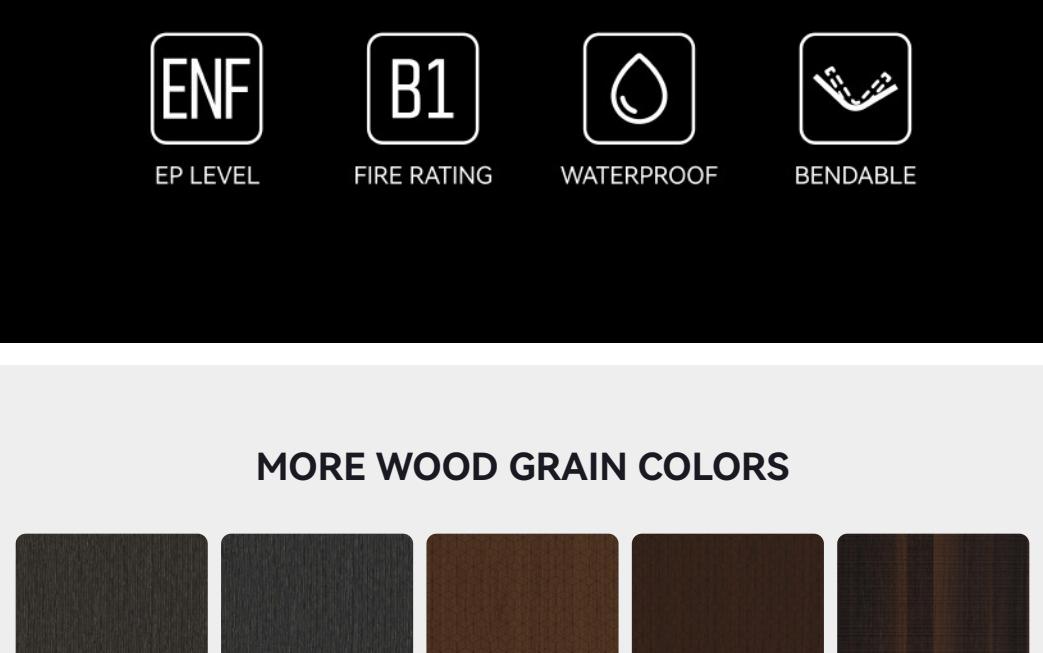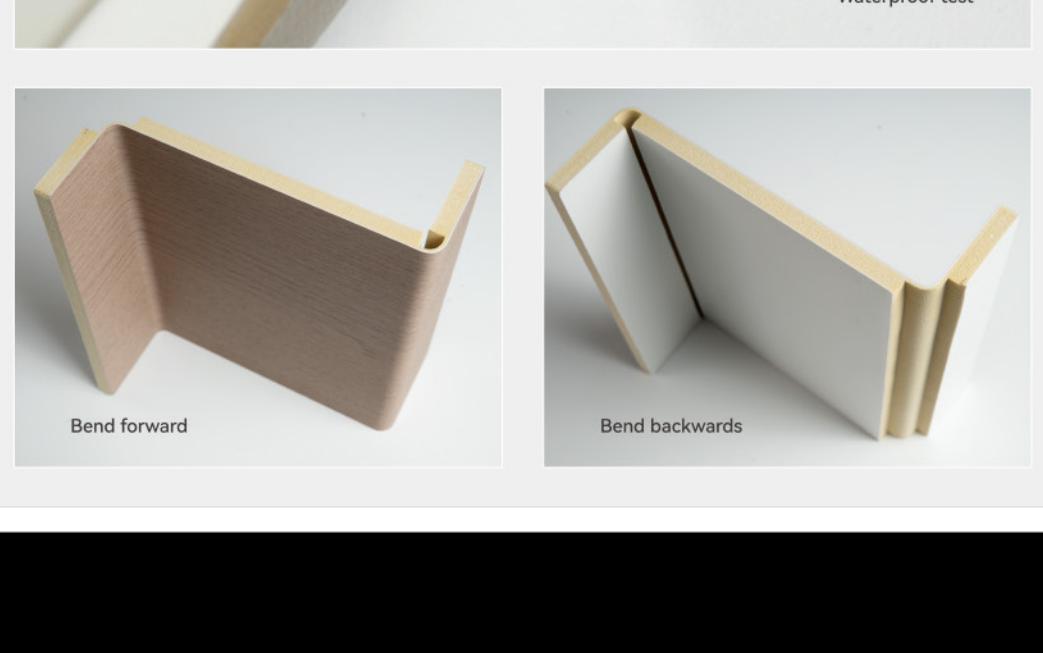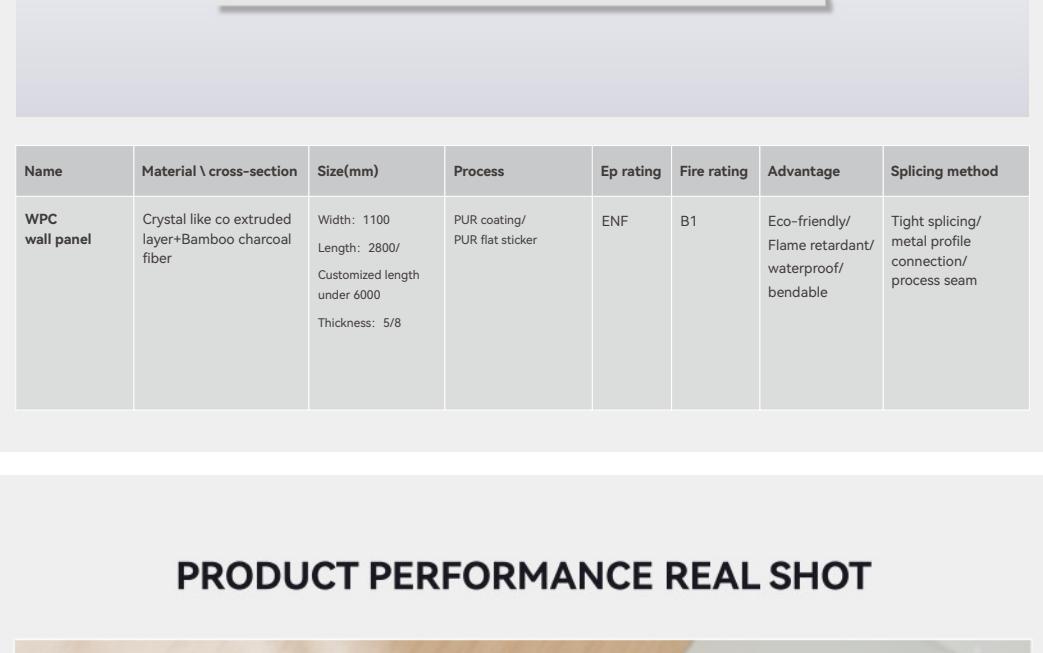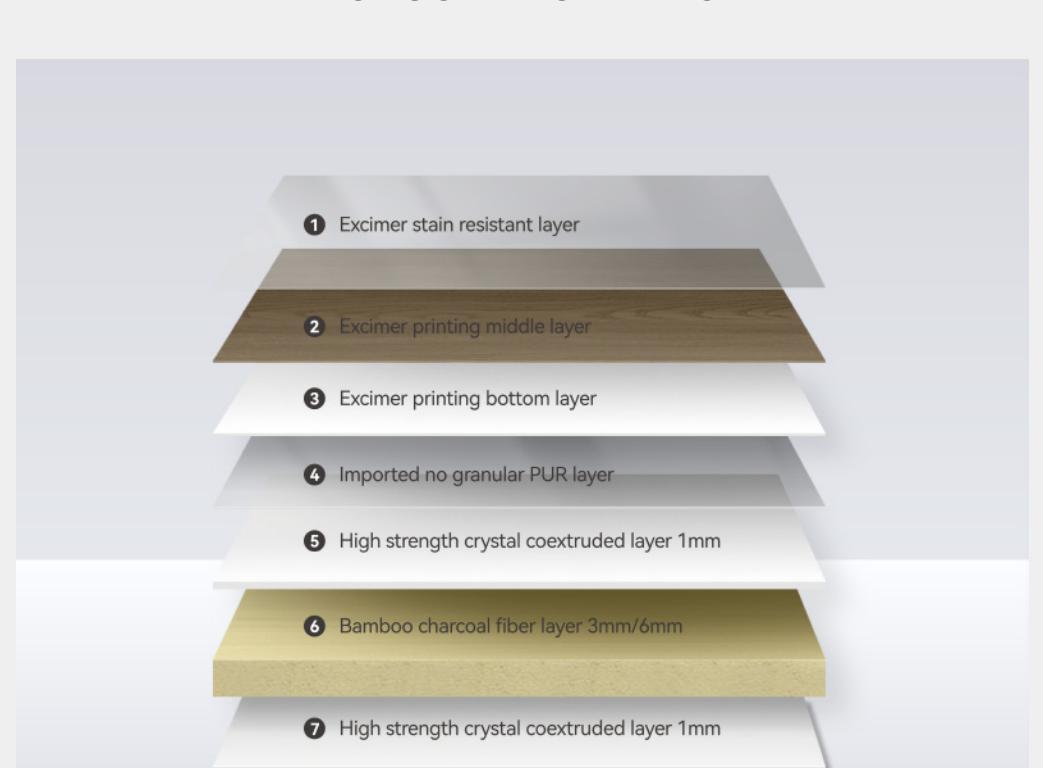

INTERNATIONAL CERTIFICATION

SGS Environmental Test Report	SGS EU Highly Concerned Substance Report	SGS Flame Retardant Test Report
SGS Formaldehyde Test Report	CE Eu Safety Certification	

FACTORY STRENGTH

