


51007

PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

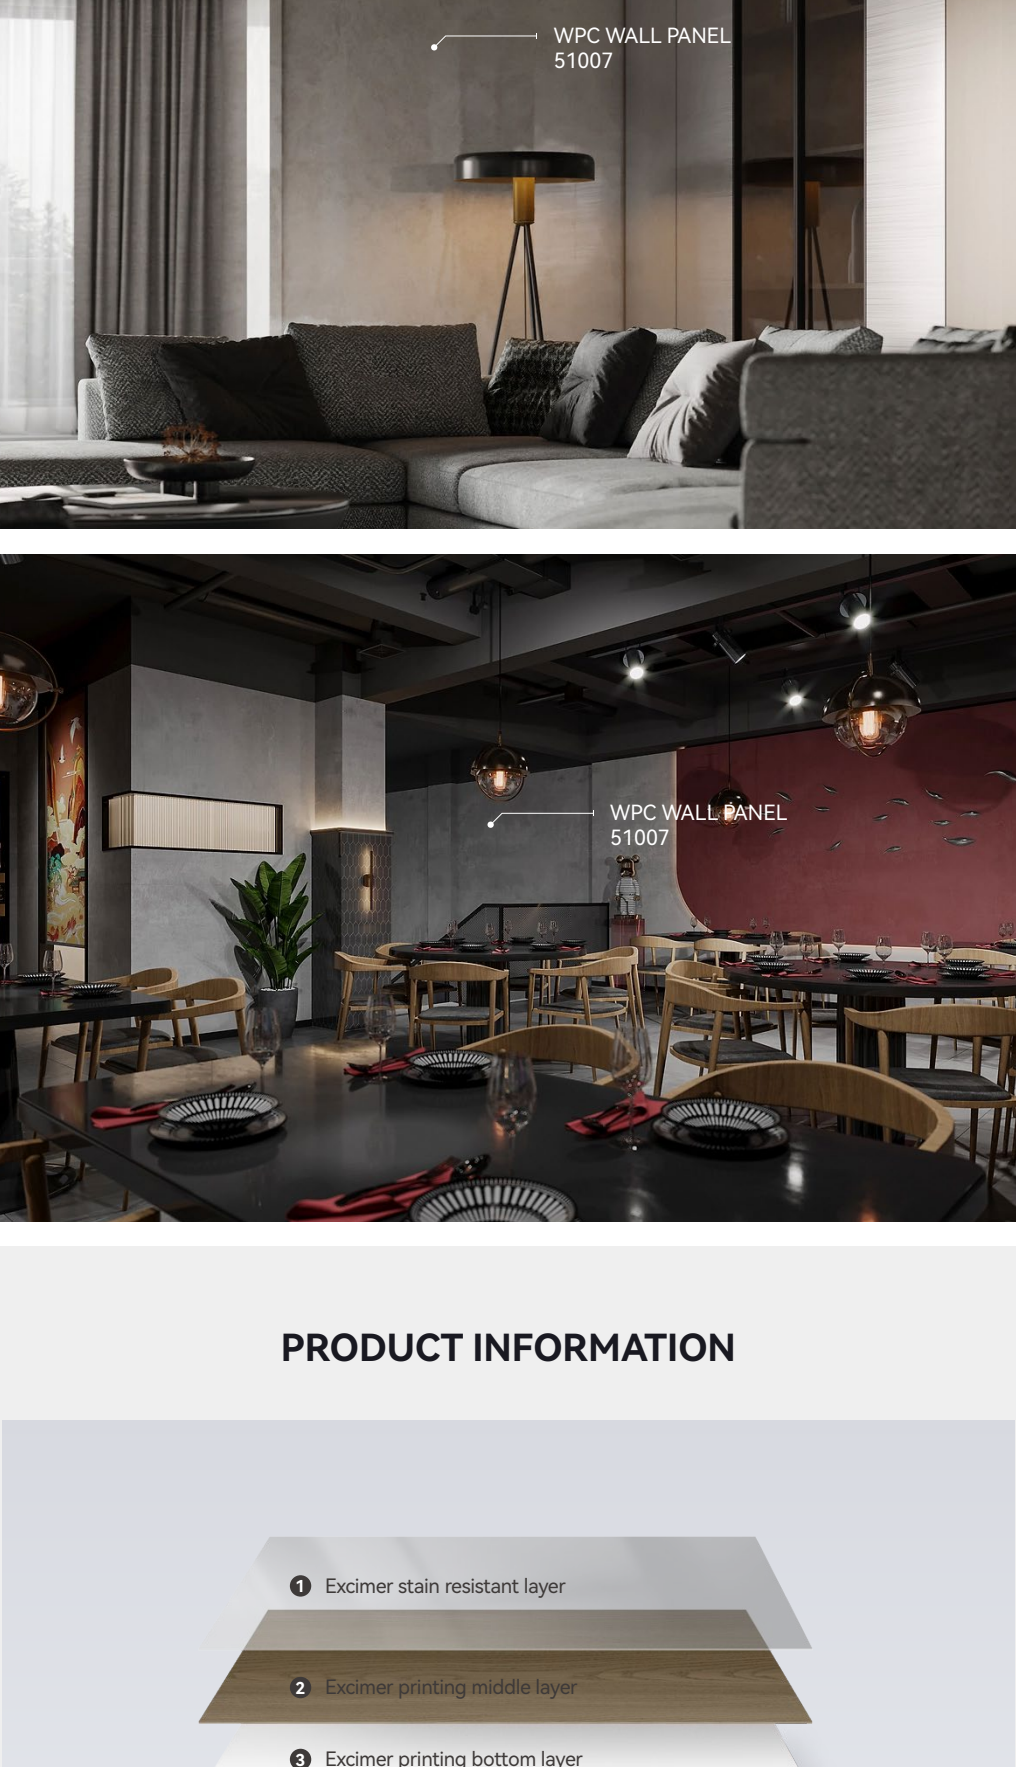

PRODUCT INFORMATION

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

ENF

EP LEVEL

B1

FIRE RATING

WATERPROOF

BENDABLE

INTERNATIONAL CERTIFICATION

MORE METAL SERIES COLORS

FACTORY STRENGTH

Mature Technology

1.Standardized, automated technology design
2.Real-time monitoring
3.PLC online control
4.60 analysis

Equipment Operation

1.Famous brands,professional maintenance
2.Cutting,edge banding and other links have realized one-stop automatic production and real-time monitoring

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines

Environment

Keep executing 5S and lean production.
OHSAS18001,ISO14001,ISO9001

PACKING METHOD