
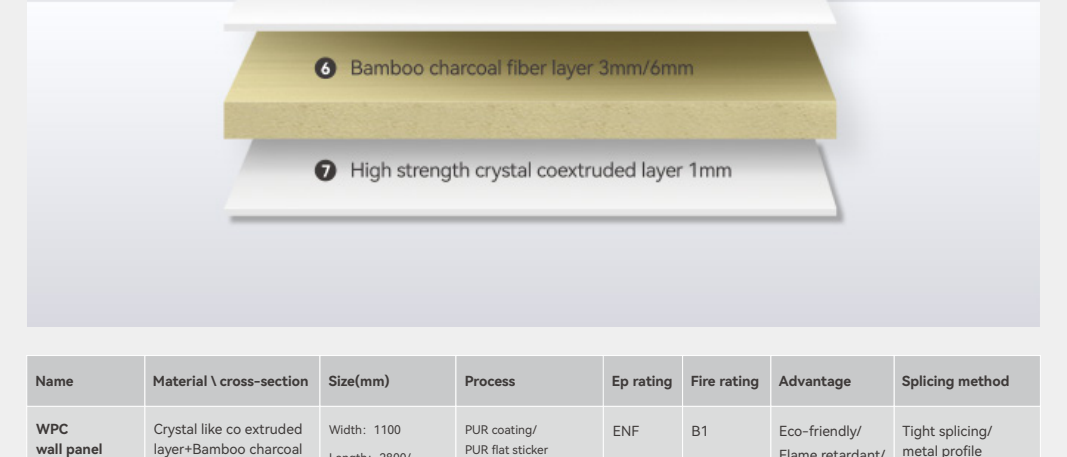
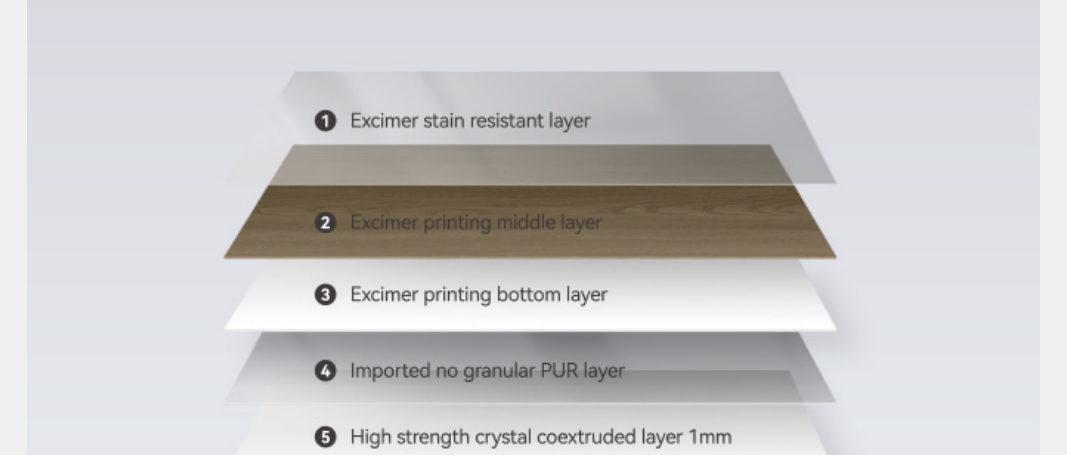


- SOLID COLOR -

## 31020








COLOR NUMBER

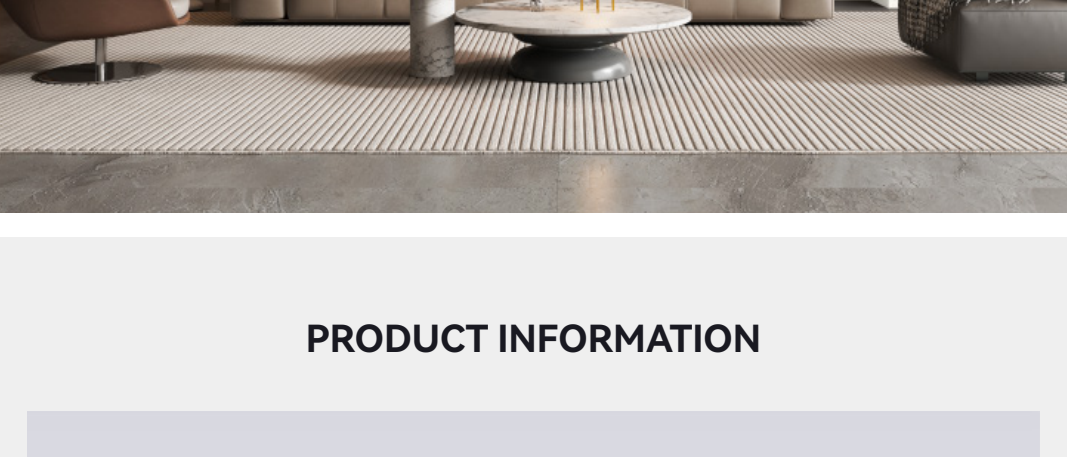

## PRODUCT INFORMATION

<div><div>1</div>Excimer stain resistant layer</div> <div><div>2</div>Excimer printing middle layer</div> <div><div>3</div>Excimer printing bottom layer</div> <div><div>4</div>Imported no-granular PUR layer</div> <div><div>5</div>High strength crystal coextruded layer 1mm</div> <div><div>6</div>Bamboo charcoal fiber layer 3mm/6mm</div> <div><div>7</div>High strength crystal coextruded layer 1mm</div>							
Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam



## PRODUCT PERFORMANCE REAL SHOT

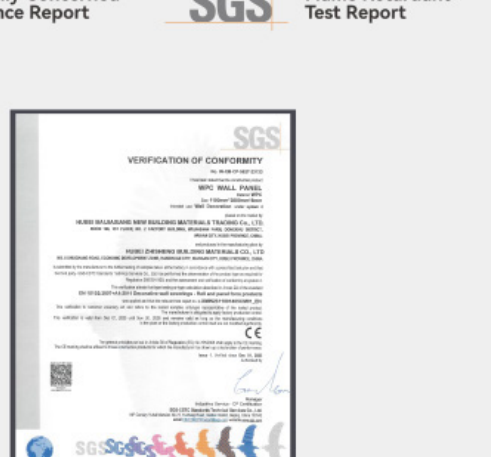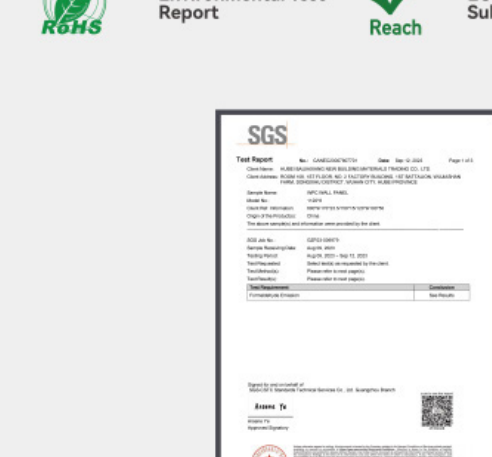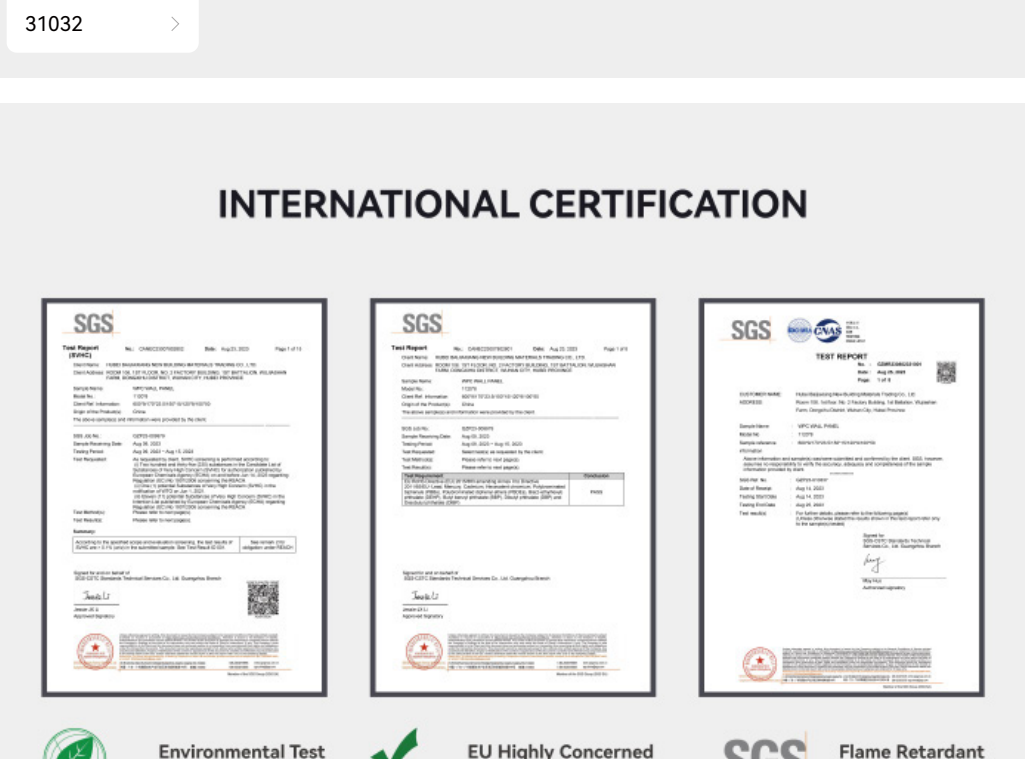







## MORE SOLID COLORS



## INTERNATIONAL CERTIFICATION

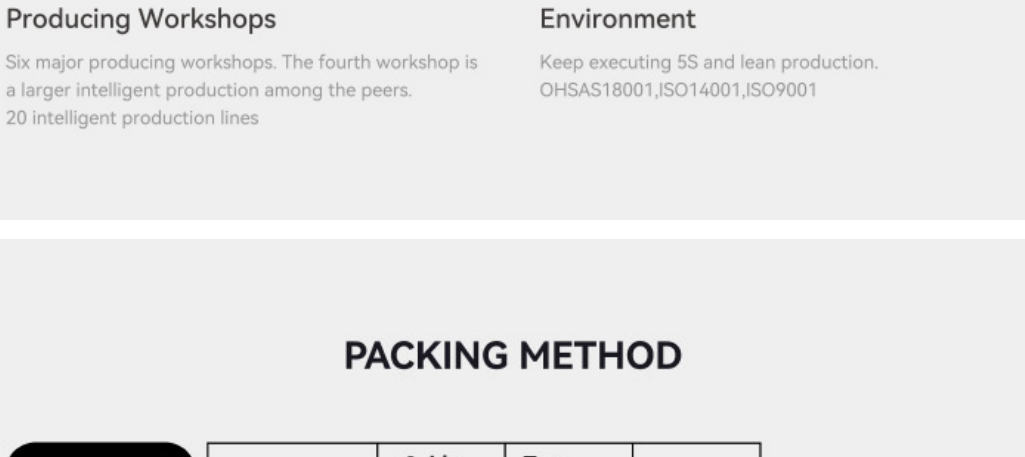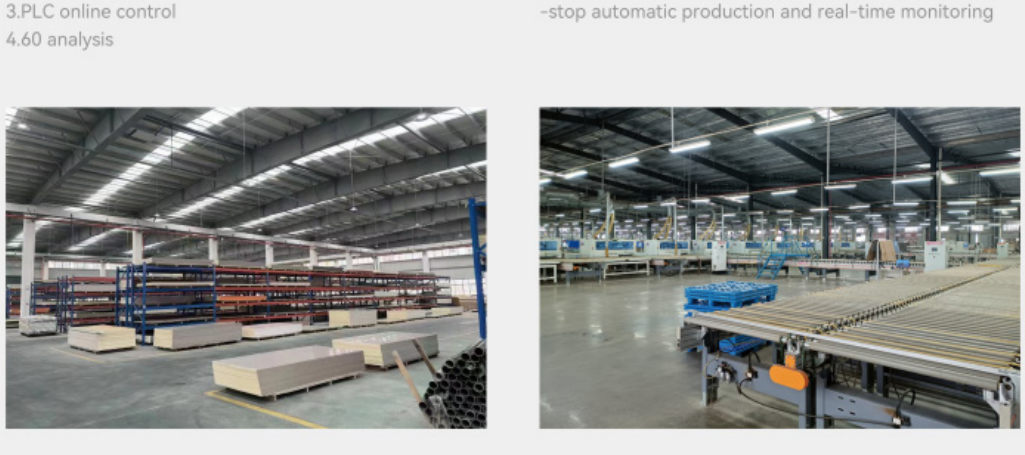

## FACTORY STRENGTH

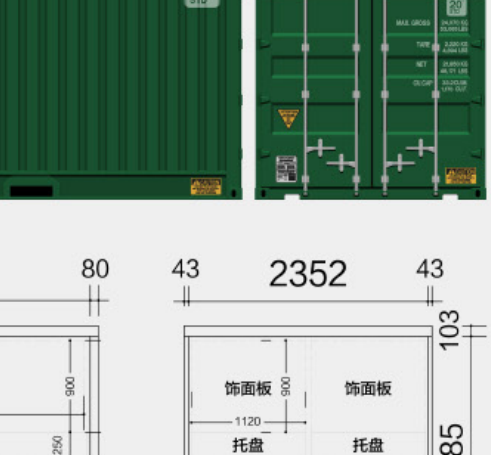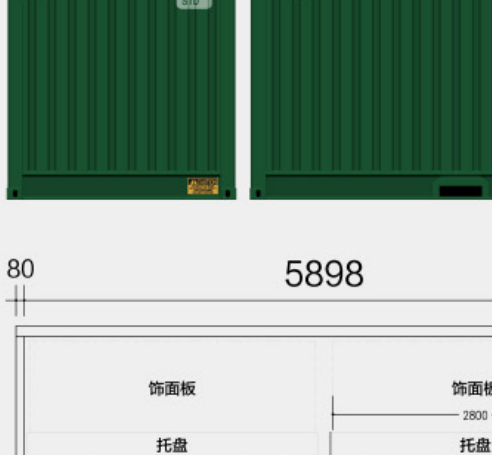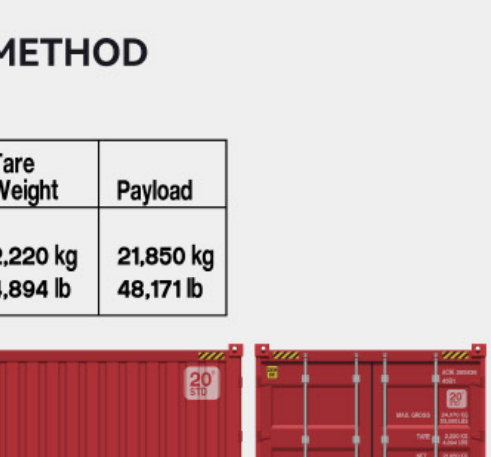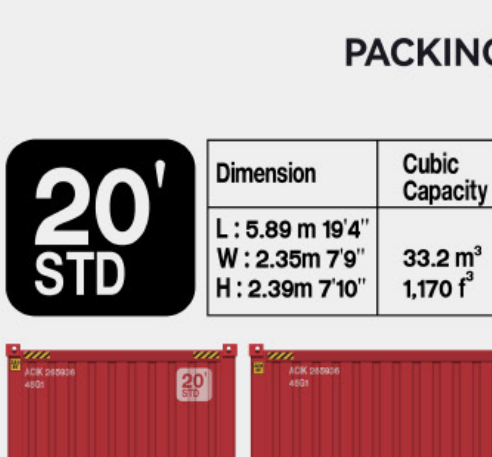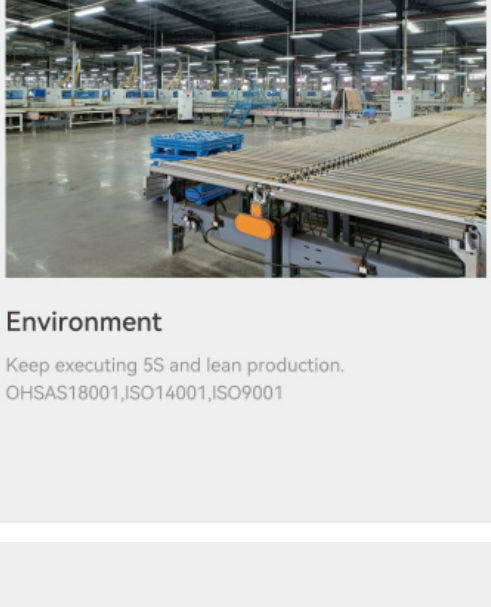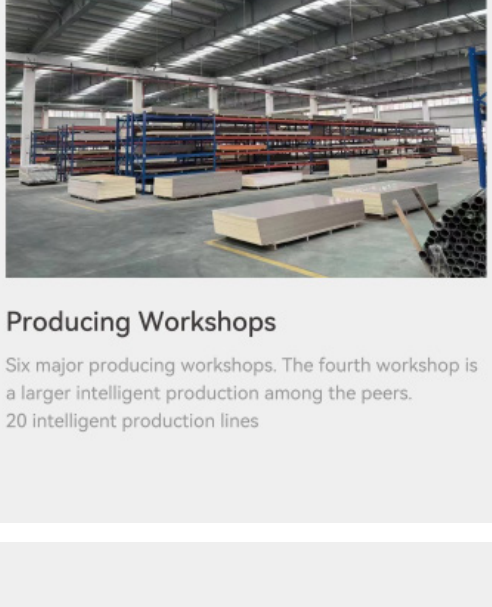

20正常装货货柜尺寸



40正常装货货柜尺寸