

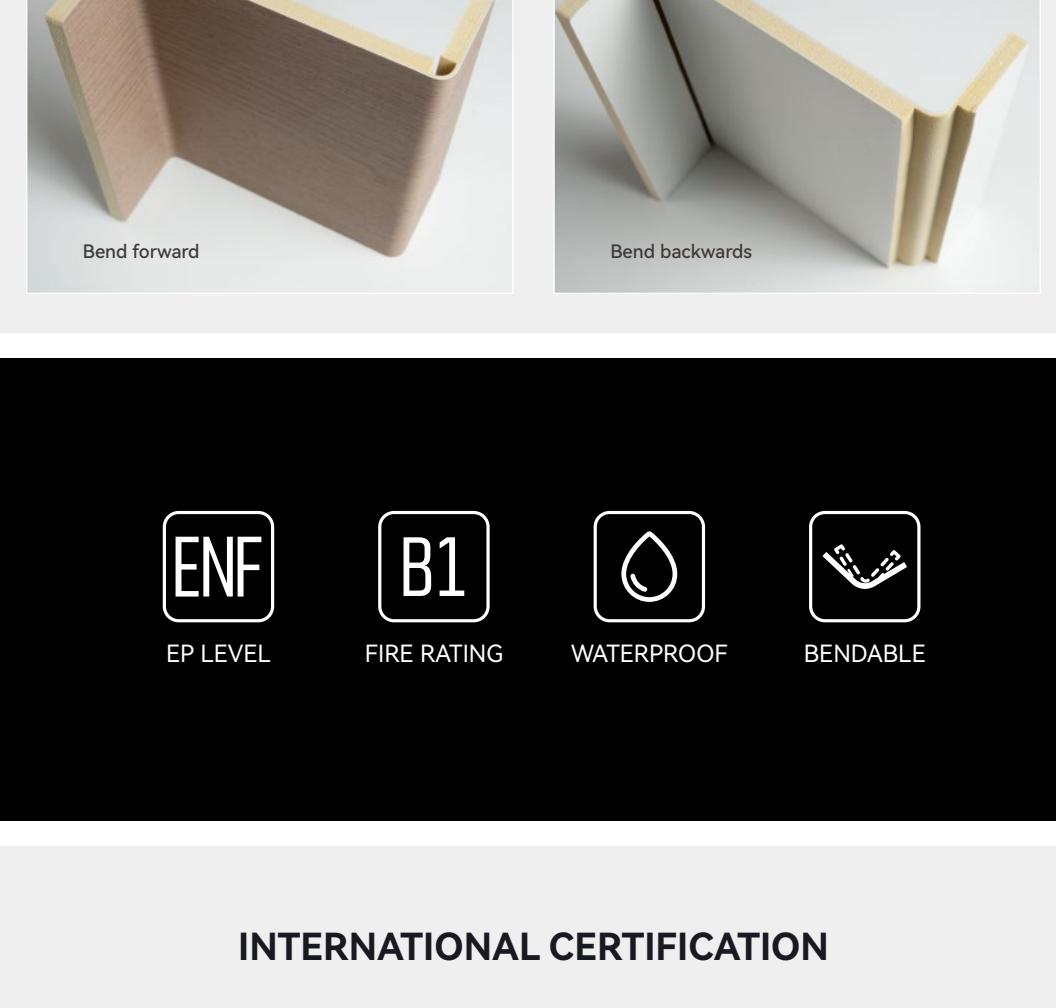


51003

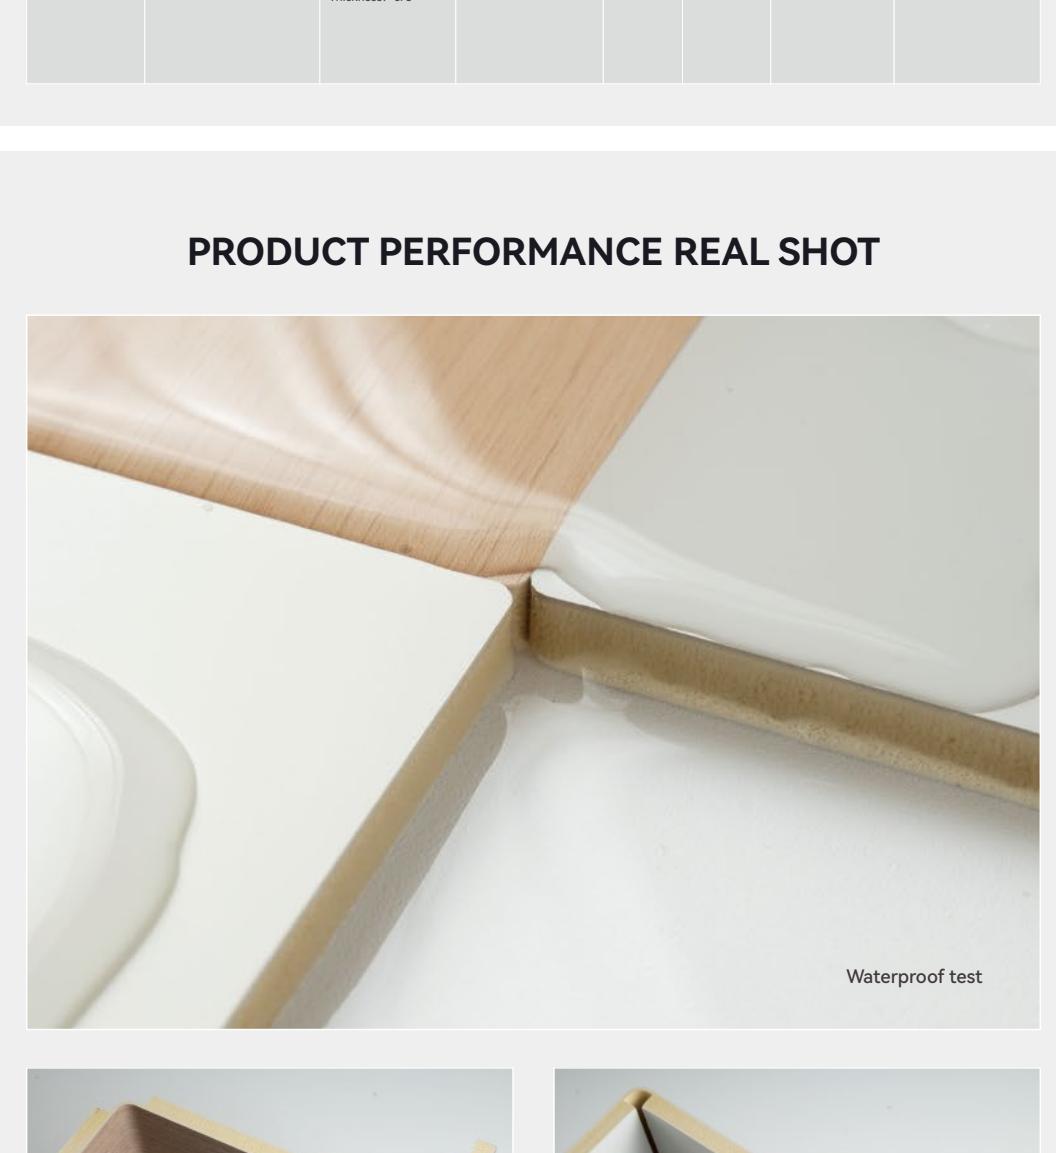


PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm


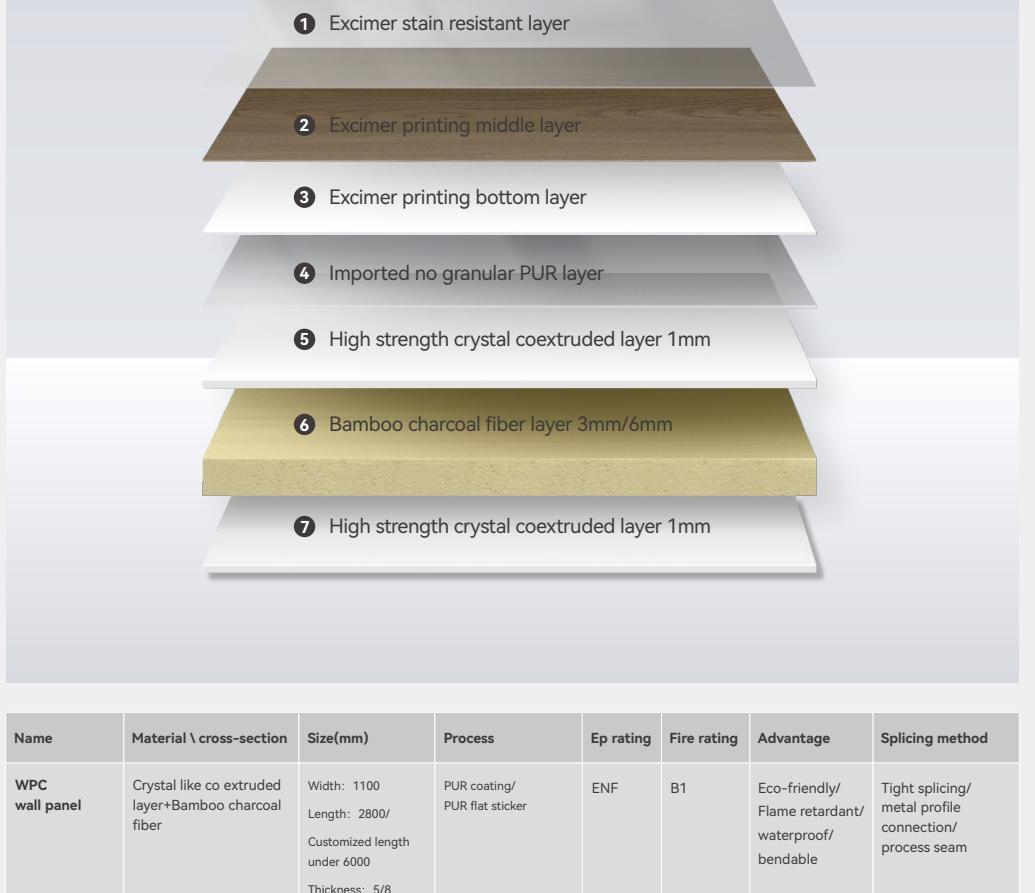


PRODUCT INFORMATION

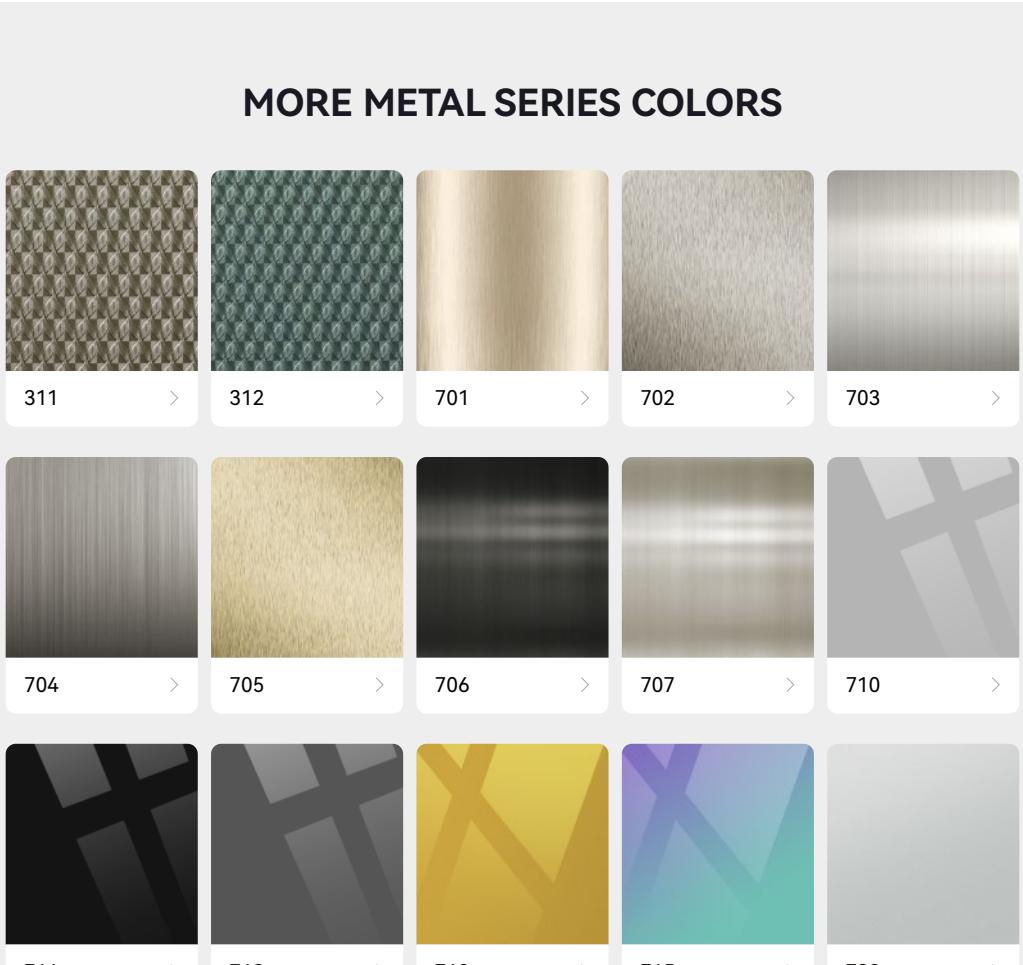

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 L: 12.00m 19'6" W: 2.39m 7'9" H: 2.39m 7'10"	PUR coating/ PUR flat sticker Customized length under 6000 Thickness: 5/8	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

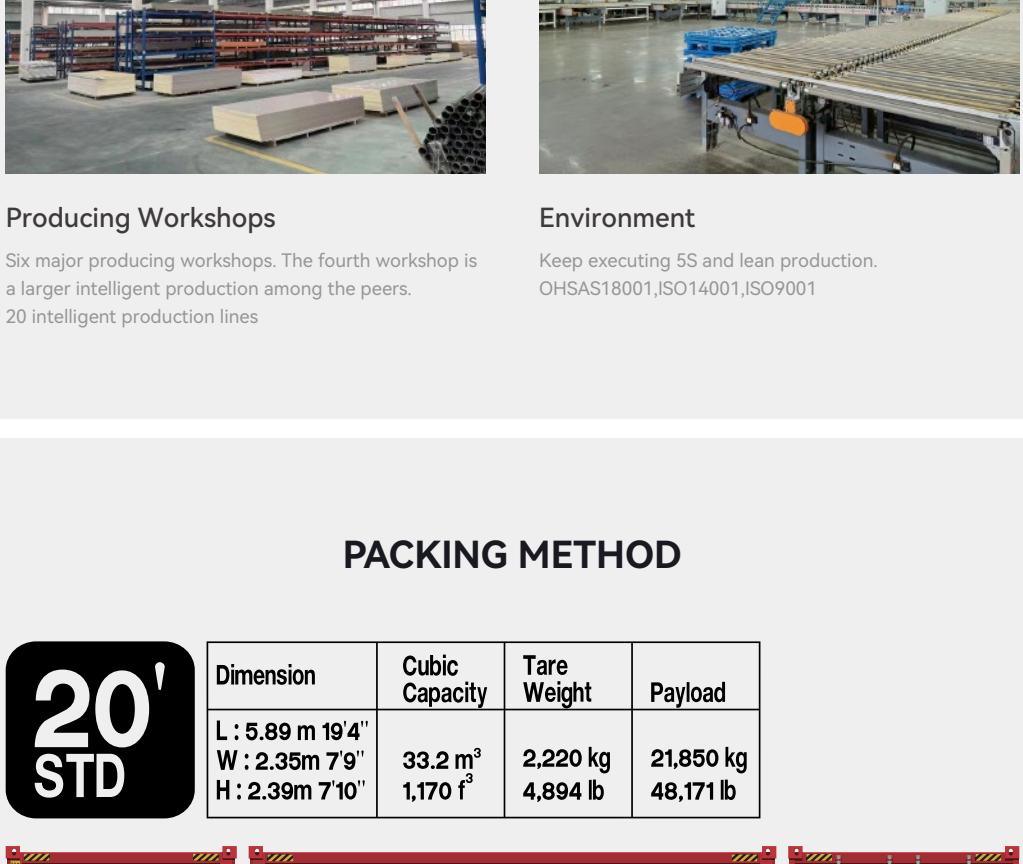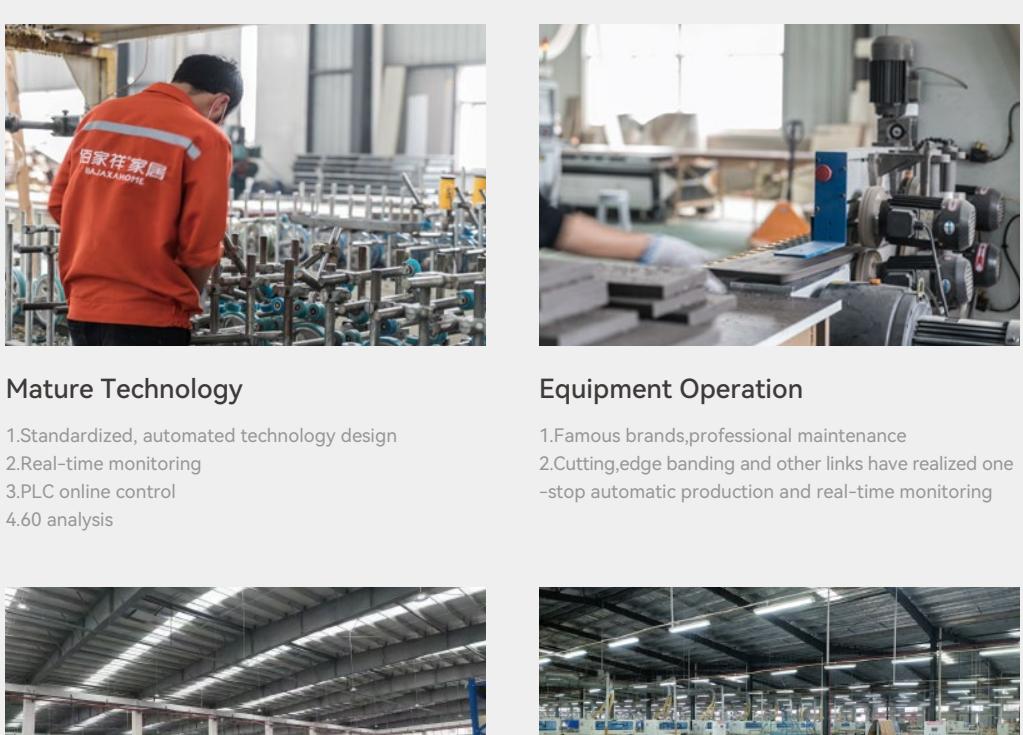

ENF

FIRE RATING

WATERPROOF

BENDABLE

EP LEVEL

REACH

EU Highly Concerned Substance Report

SGS Flame Retardant Test Report

SGS Environmental Test Report

SGS Reach

SGS Eu Safety Certification

SGS Formaldehyde Test Report

CE

SGS Formaldehyde Test Report

CE