



903

PRODUCT SIZE


Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm



PRODUCT INFORMATION

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 4000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

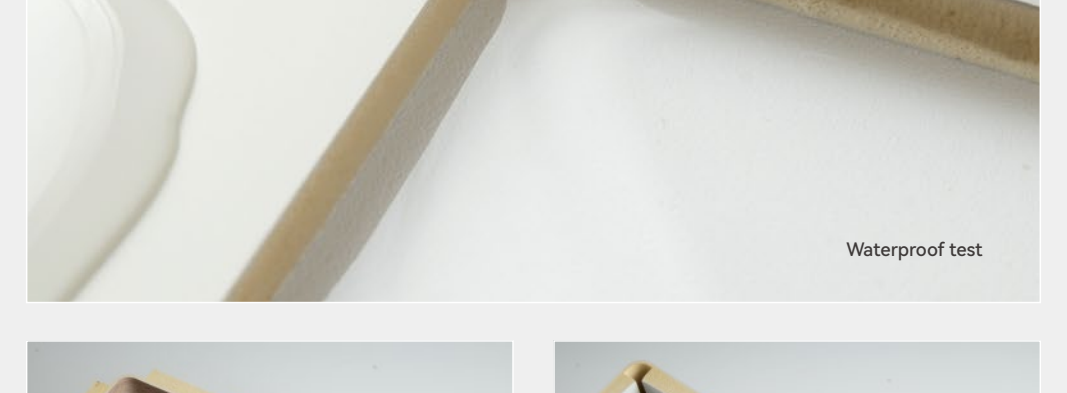

ENF

EP LEVEL

B1

FIRE RATING

WATERPROOF

BENDABLE

INTERNATIONAL CERTIFICATION

MORE METAL SERIES COLORS

311

312

701

702

703

704

705

706

707

710

711

712

713

715

732

733

734

736

737

751

761

901

903

905

910

951

31061

31062

31063

31065

FT 25701

FT 25702

FT 25703

FT 25704

FT 25705

FT 25706

FT 25707

FT 25708

FT 25709

FACTORY STRENGTH

Mature Technology

1.Standardized, automated technology design  
2.Real-time monitoring  
3.PLC online control  
4.60 analysis

Equipment Operation

1.Famous brands,professional maintenance  
2.Cutting,edge banding and other links have realized one-stop automatic production and real-time monitoring

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.  
20 intelligent production lines

Environment

Keep executing 5S and lean production.  
OHSAS18001,ISO14001,ISO9001

PACKING METHOD

20' STD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4"	33.2 m <sup>3</sup>	2,220 kg	21,850 kg
W : 2.35m 7'9"	1,170 f <sup>3</sup>	4,894 lb	48,171 lb
H : 2.39m 7'10"			

80

5898

80

43

2352

43

20正常装货货柜尺寸

40' STD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'6"	67.7 m <sup>3</sup>	3,740 kg	26,760 kg
W : 2.35m 7'9"	2,391 f <sup>3</sup>	8,245 lb	58,996 lb
H : 2.39m 7'10"			

80

12032

80

43

2352

43

40正常装货货柜尺寸