


5009



PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

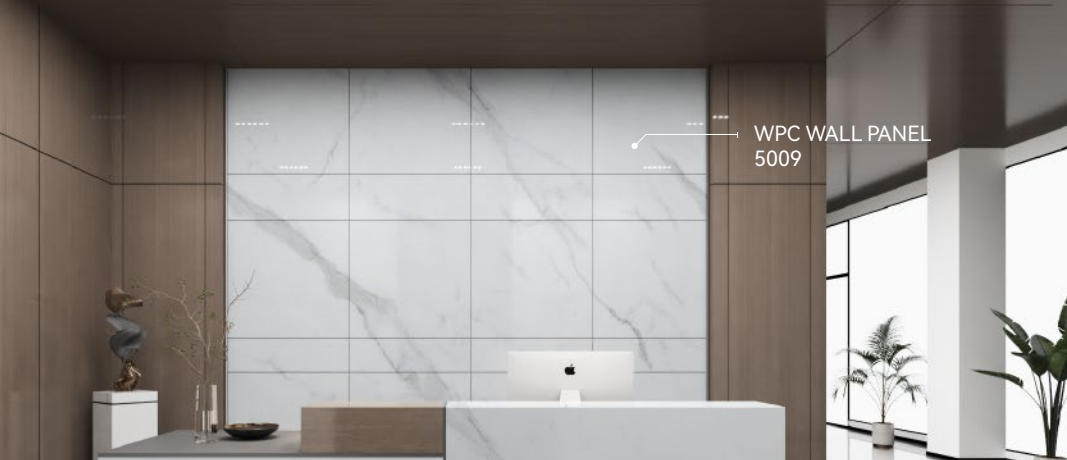

PRODUCT INFORMATION

1

Excimer stain resistant layer

2

Excimer printing middle layer

3

Excimer printing bottom layer

4

Imported no granular PUR layer

5

High strength crystal coextruded layer 1mm

6







Bamboo charcoal fiber layer 3mm/6mm

7



High strength crystal coextruded layer 1mm

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam






PRODUCT PERFORMANCE REAL SHOT

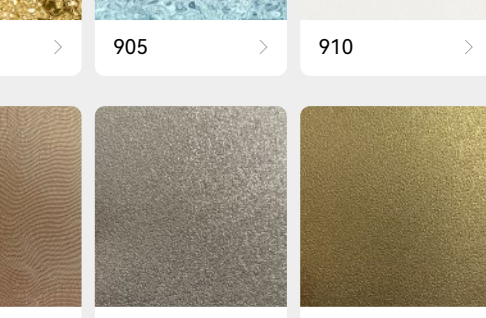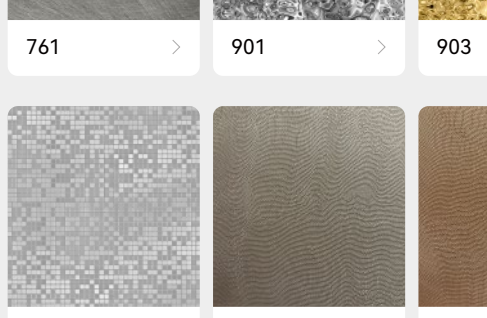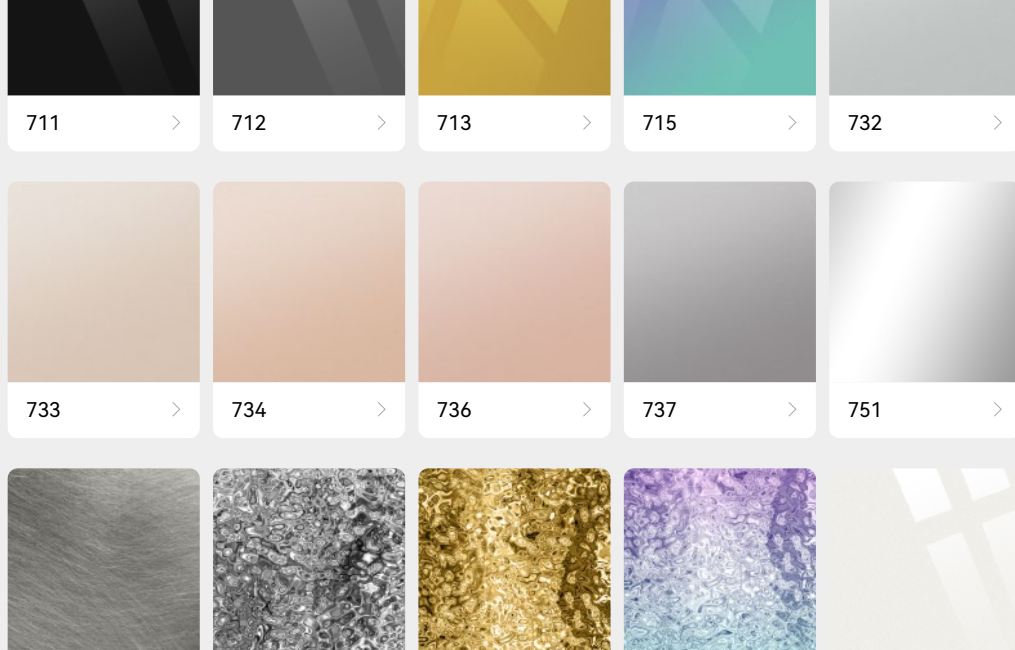

INTERNATIONAL CERTIFICATION

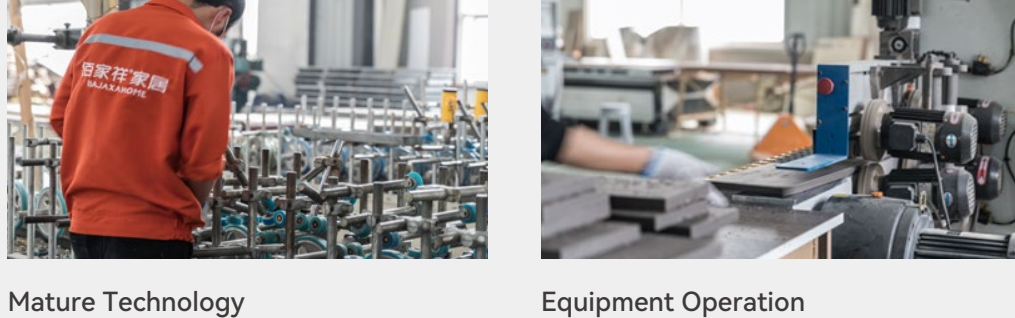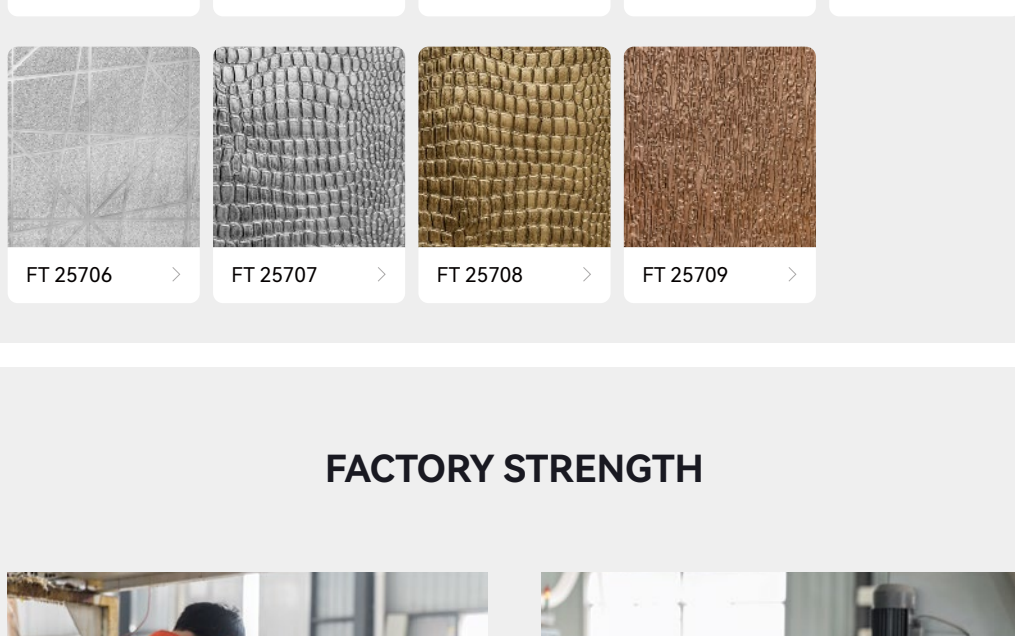

MORE METAL SERIES COLORS

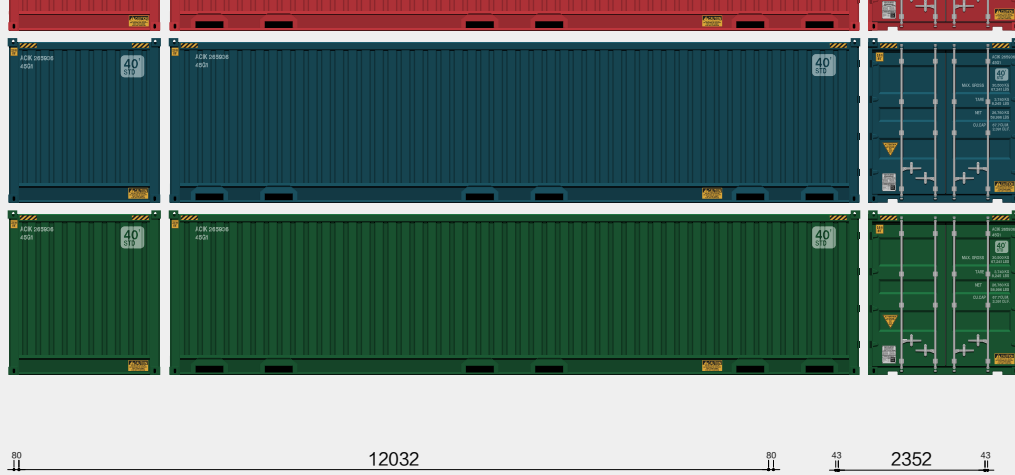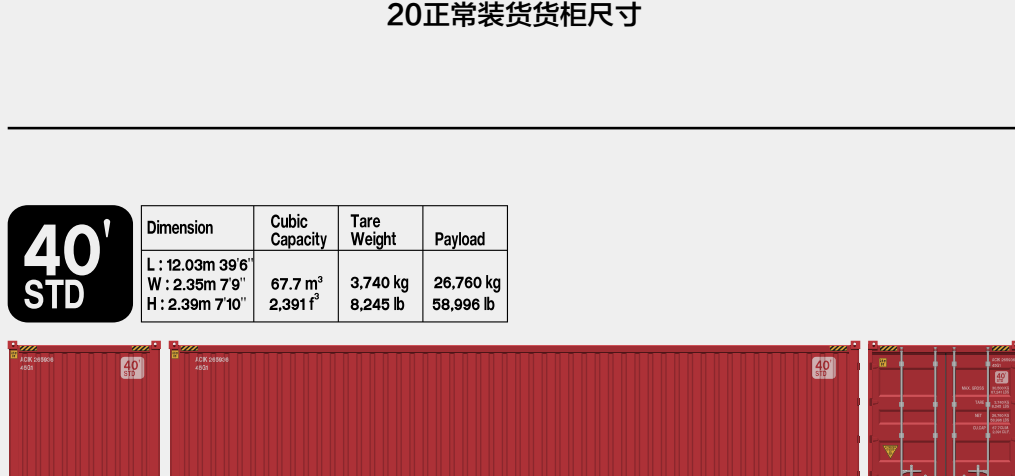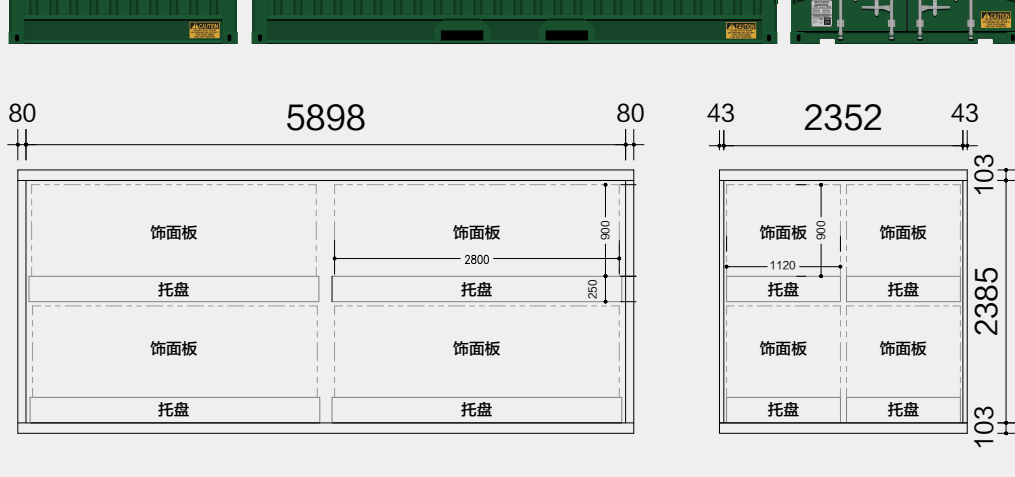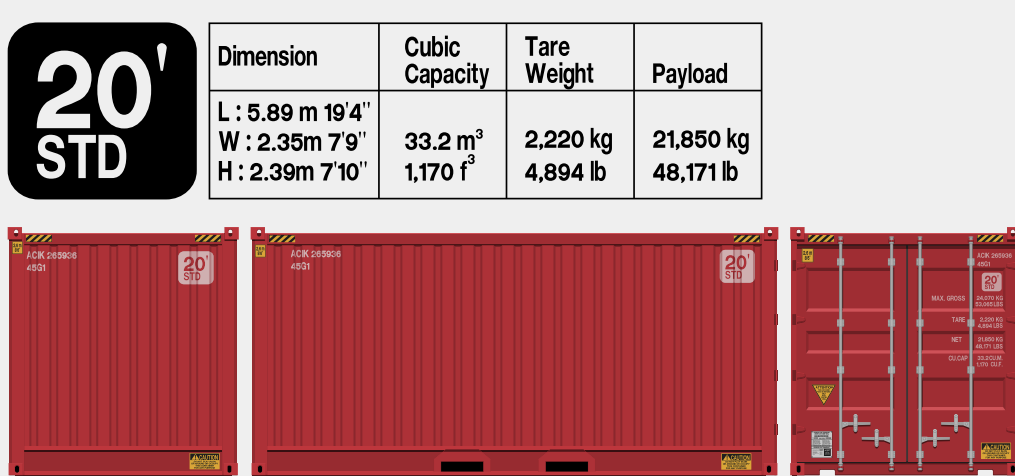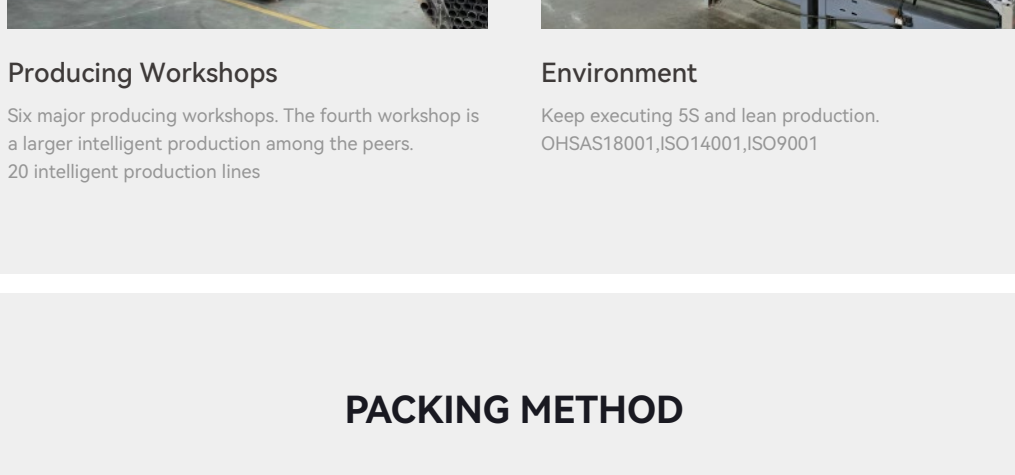

FACTORY STRENGTH

Mature Technology

- 1. Standardized, automated technology design
- 2. Real-time monitoring
- 3. PLC online control
- 4. 60 analysis

Equipment Operation

- 1. Famous brands, professional maintenance
- 2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers. 20 intelligent production lines

Environment

Keep executing 5S and lean production. OHSAS18001, ISO14001, ISO9001

PACKING METHOD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4" W : 2.35m 7'9" H : 2.39m 7'10"	33.2 m³ 1,170 f³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

