

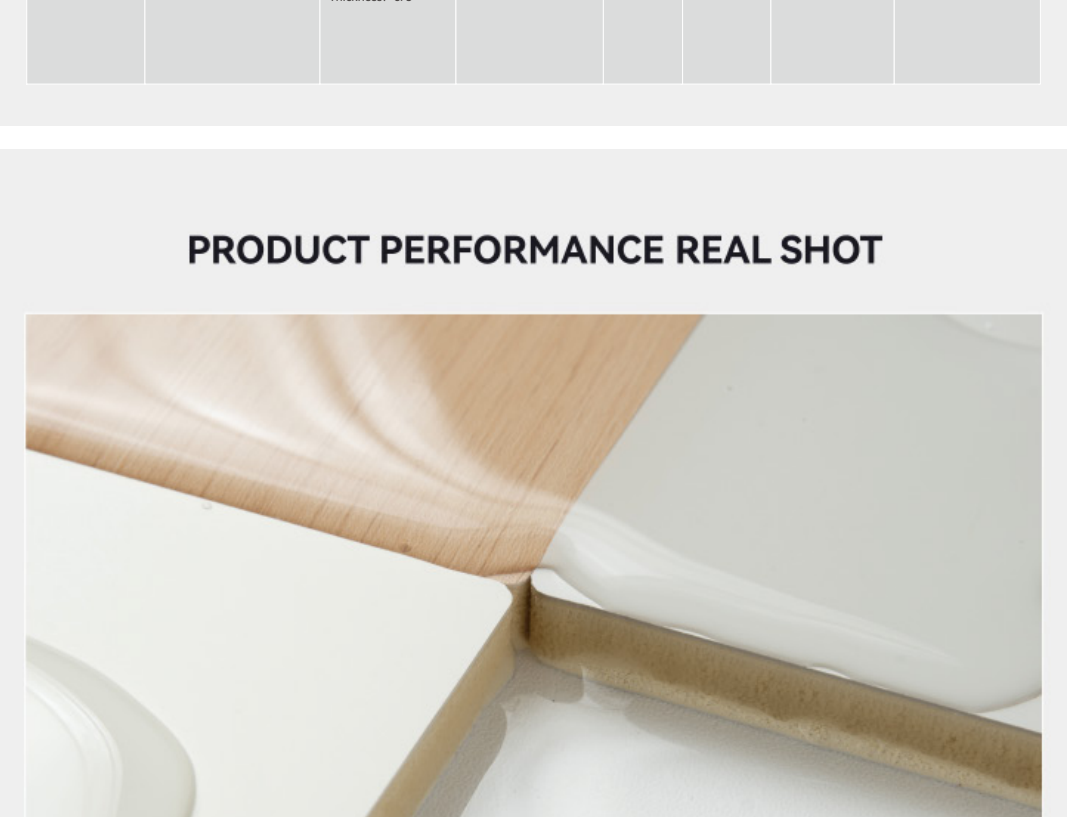


# FT 25807

COLOR NUMBER



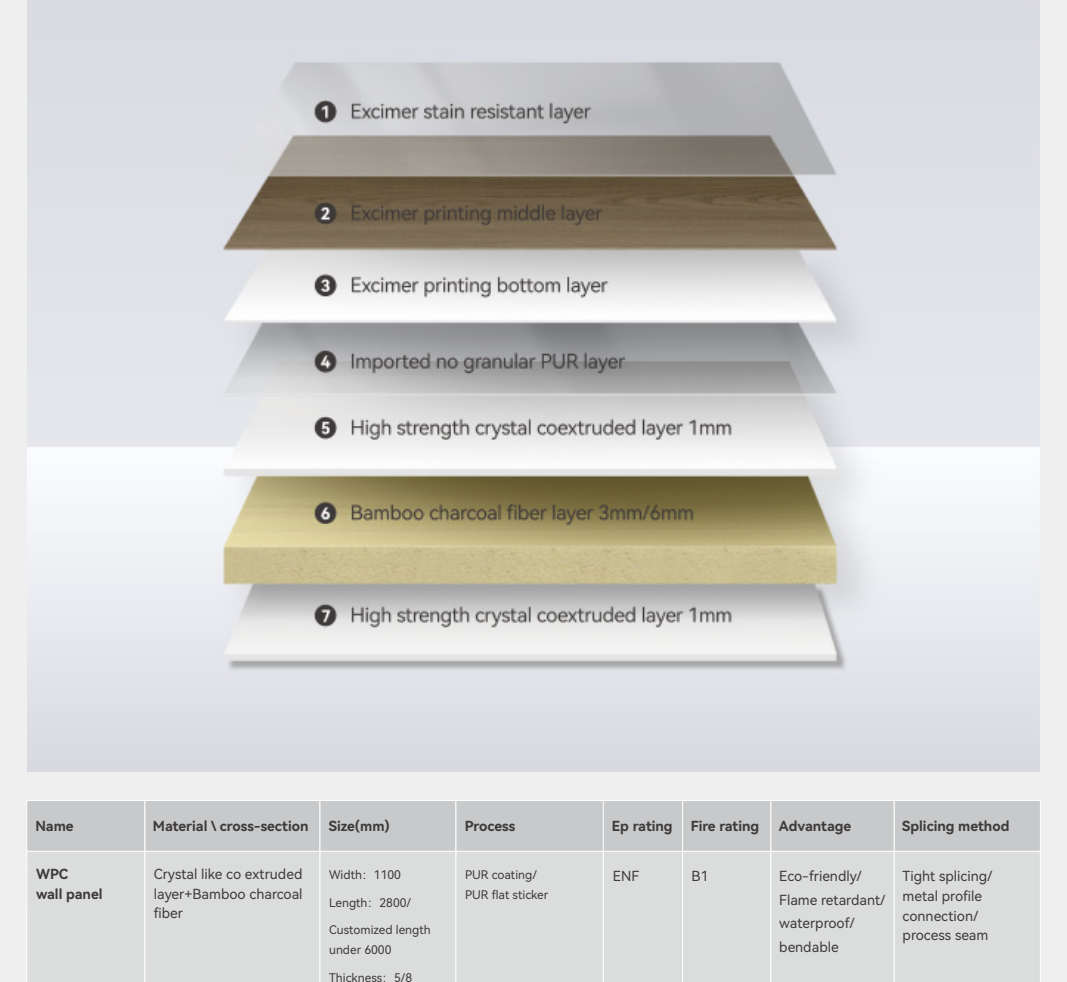


## PRODUCT INFORMATION

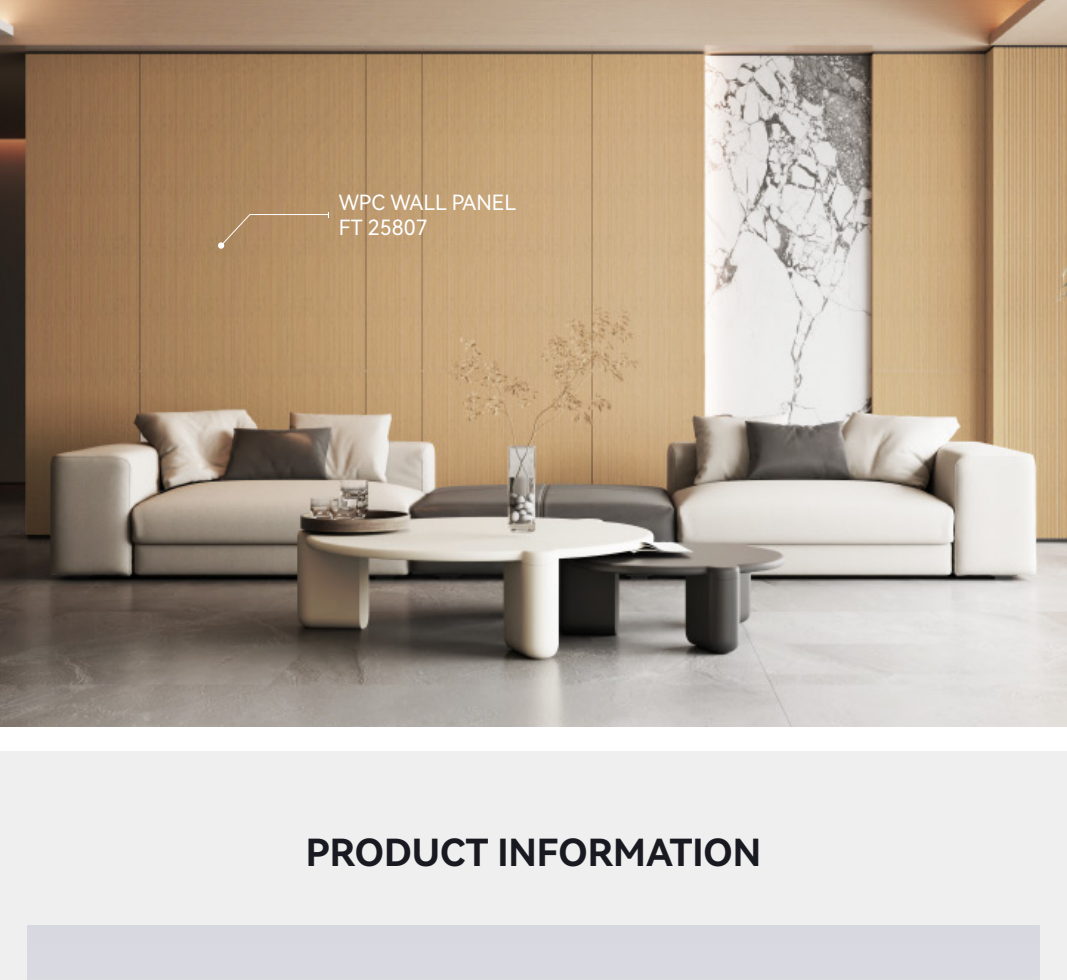




Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

## PRODUCT PERFORMANCE REAL SHOT

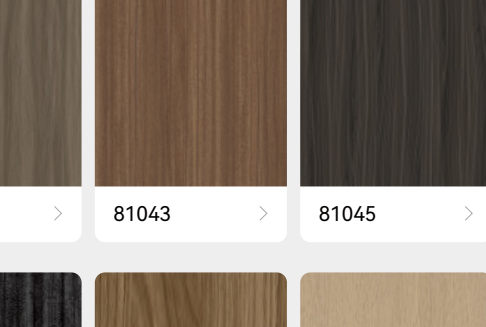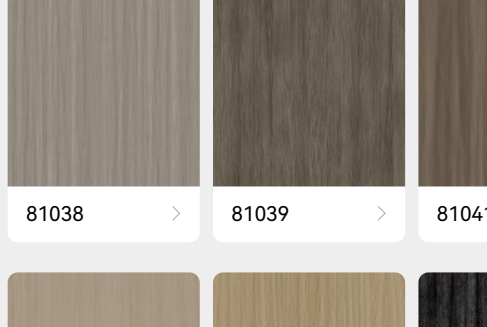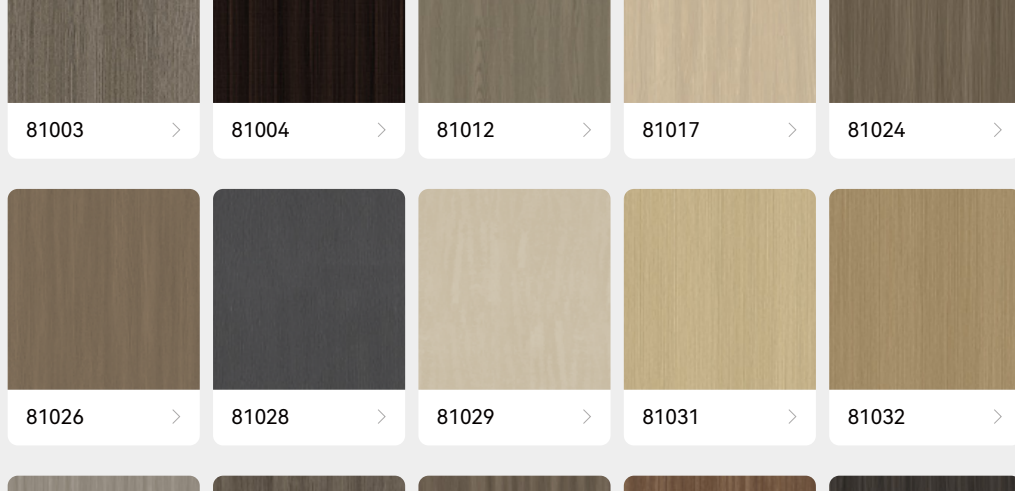

Bend forward


Bend backwards





## MORE WOOD GRAIN COLORS



## INTERNATIONAL CERTIFICATION

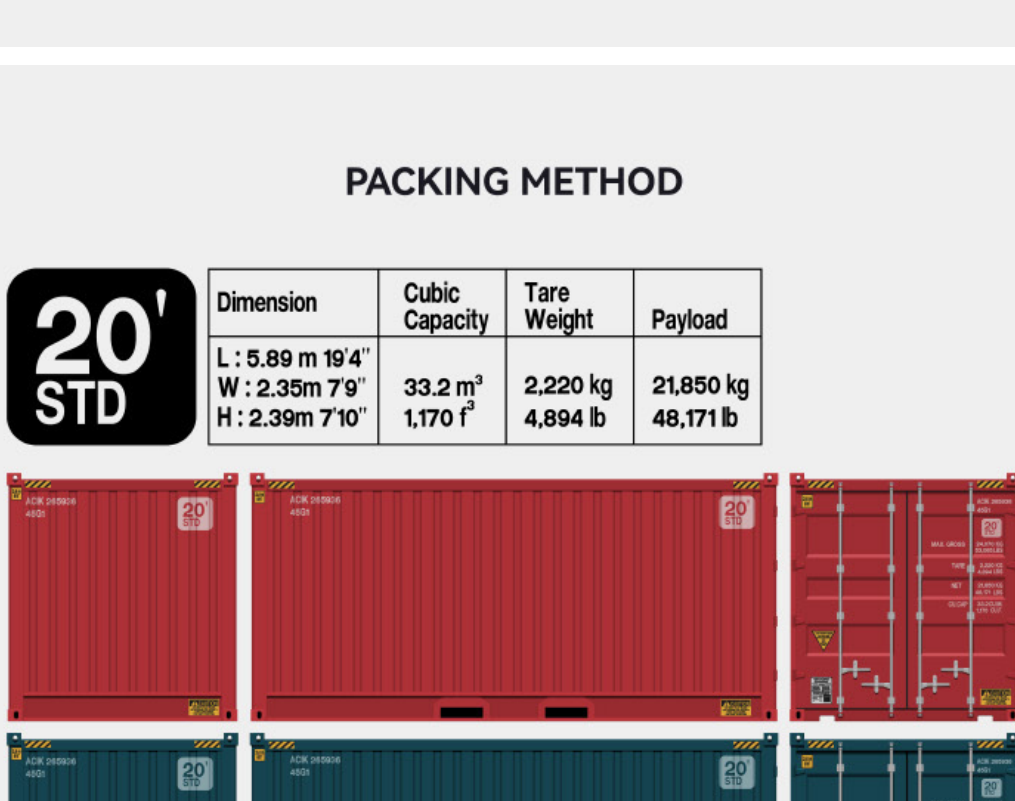


## FACTORY STRENGTH

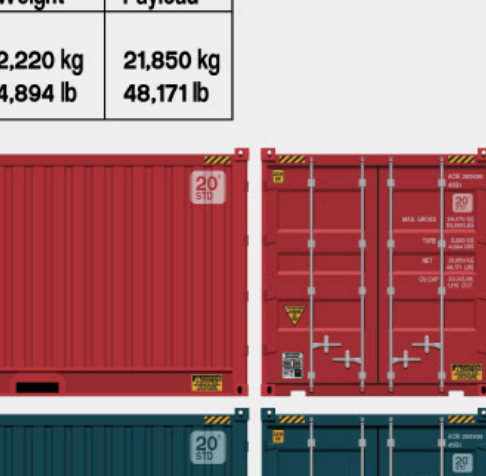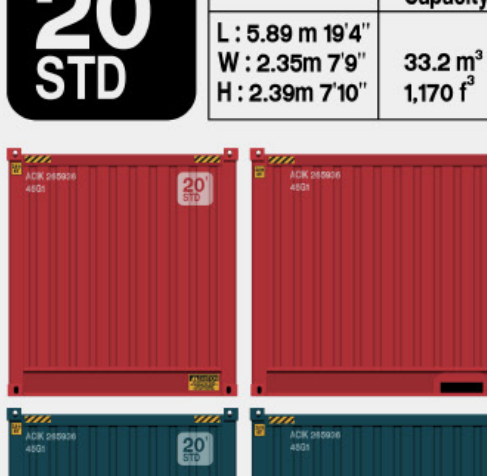

**Mature Technology**  
1.Standardized, automated technology design  
2.Real-time monitoring  
3.PLC online control  
4.60 analysis

**Equipment Operation**  
1.Famous brands,professional maintenance  
2.Cutting,edge banding and other links have realized one  
-stop automatic production and real-time monitoring

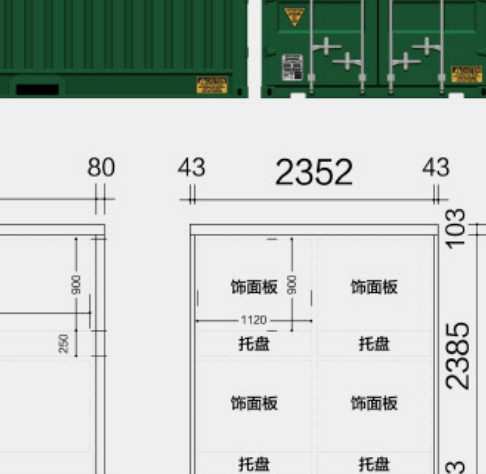

**Producing Workshops**  
Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.  
20 intelligent production lines

**Environment**  
Keep executing 5S and lean production.  
OHSAS18001,ISO14001,ISO9001

## PACKING METHOD

