

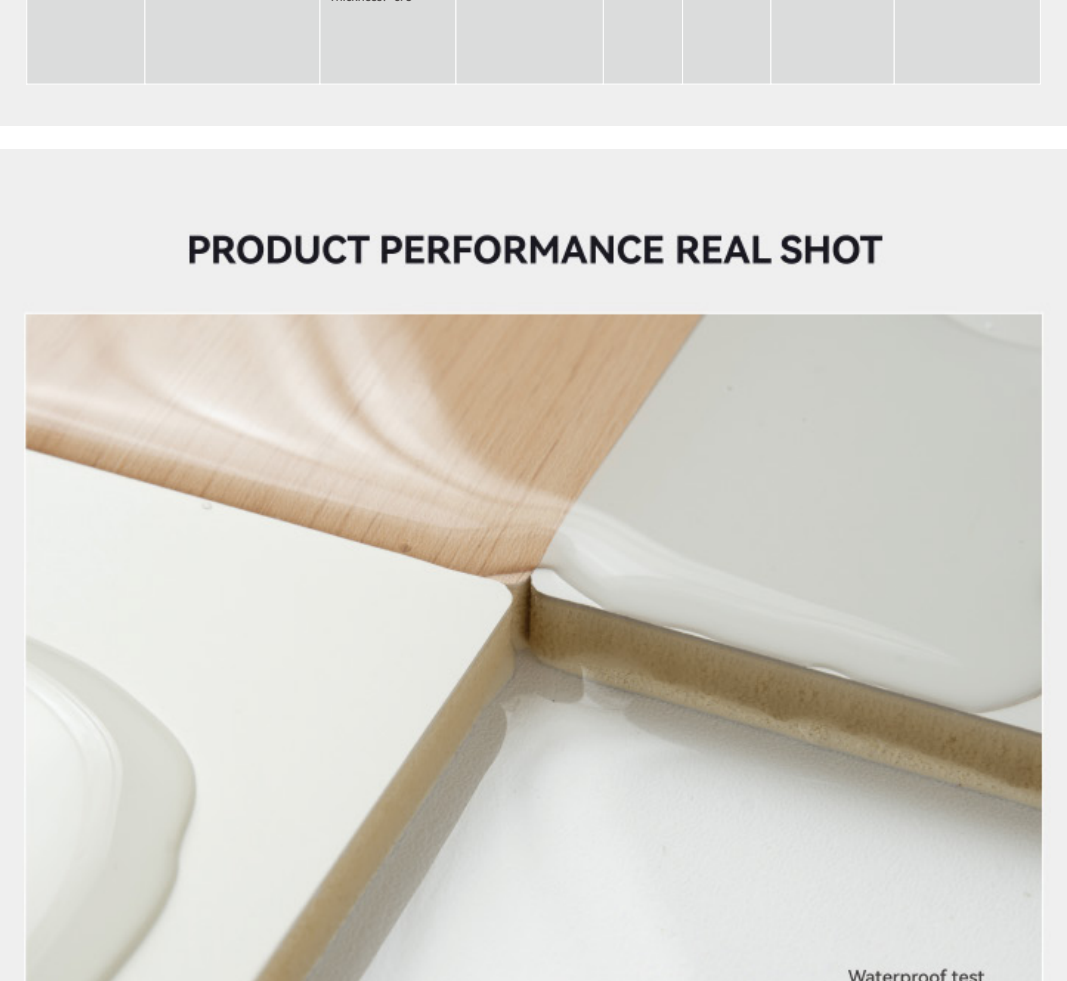


8030

COLOR NUMBER

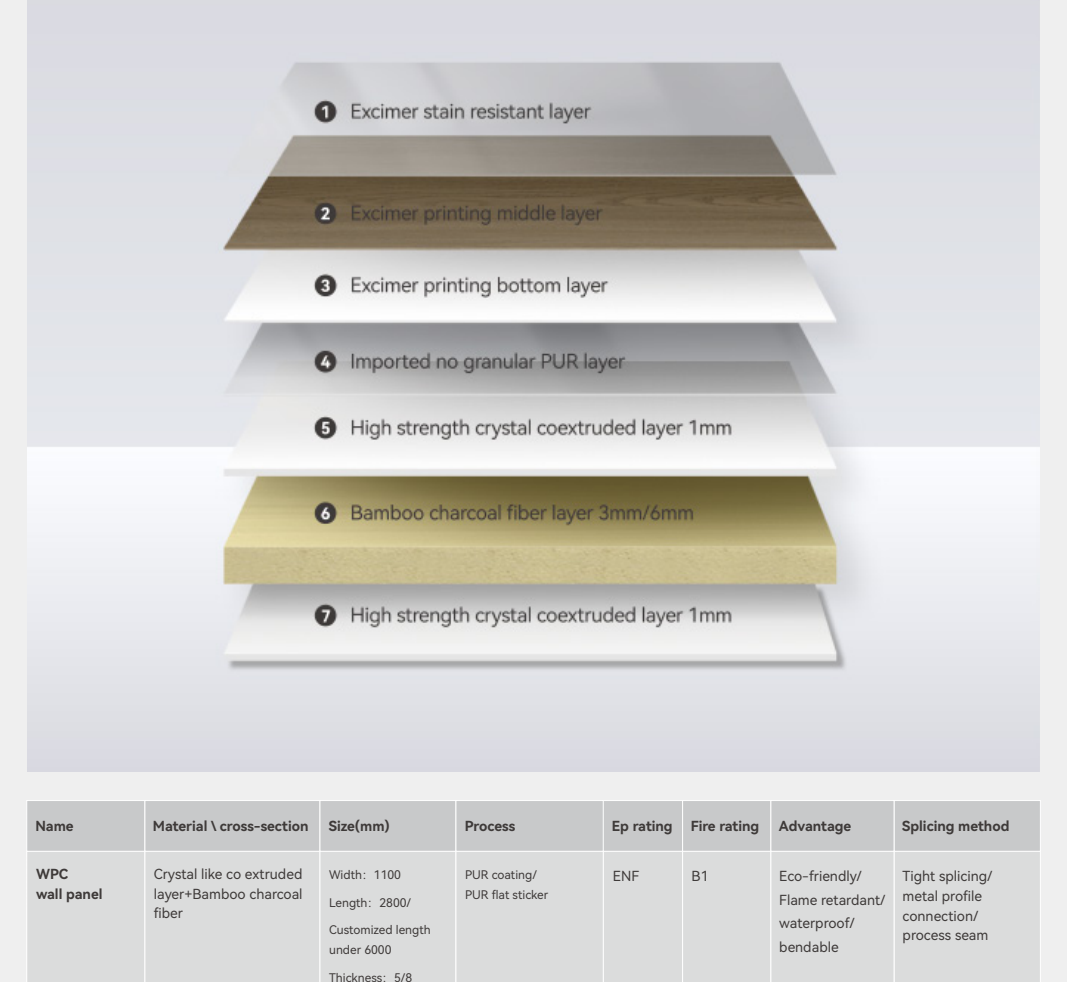


PRODUCT INFORMATION

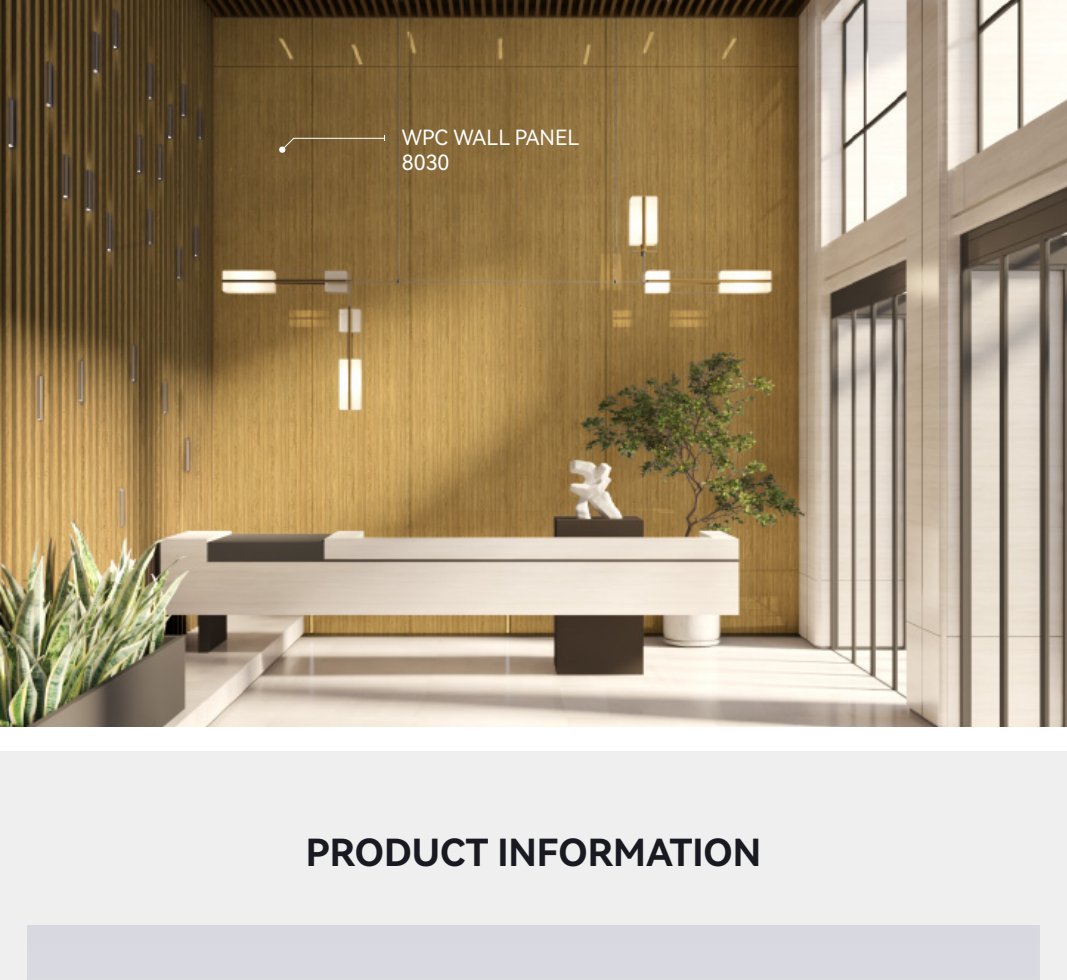


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam


PRODUCT PERFORMANCE REAL SHOT

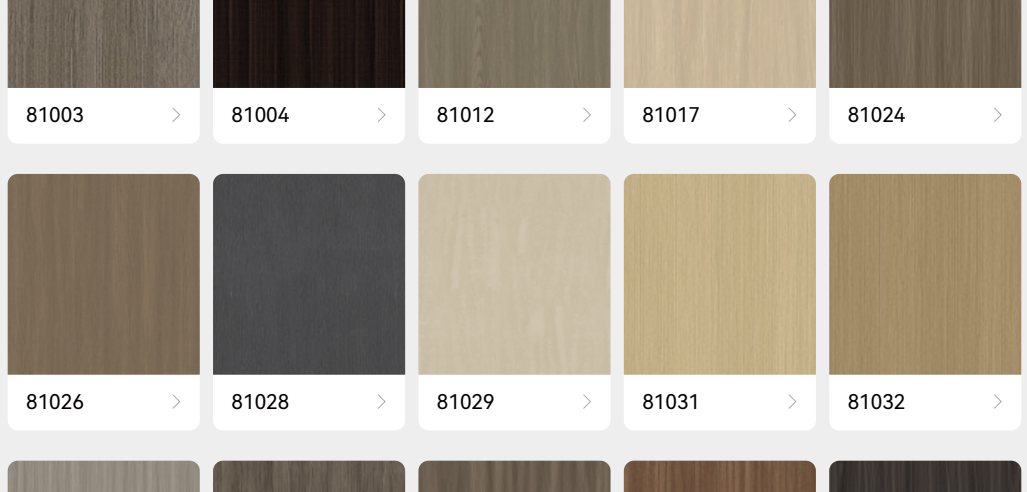

Waterproof test

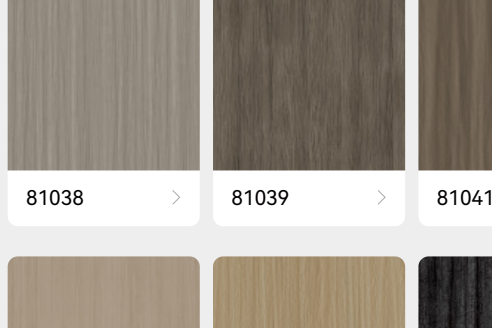

Bend forward

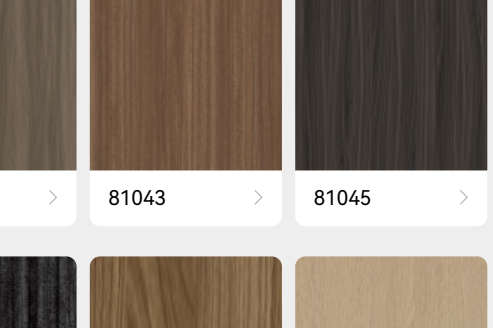

Bend backwards

ENF

EP LEVEL

B1

FIRE RATING

WATERPROOF


BENDABLE

MORE WOOD GRAIN COLORS



INTERNATIONAL CERTIFICATION

FACTORY STRENGTH

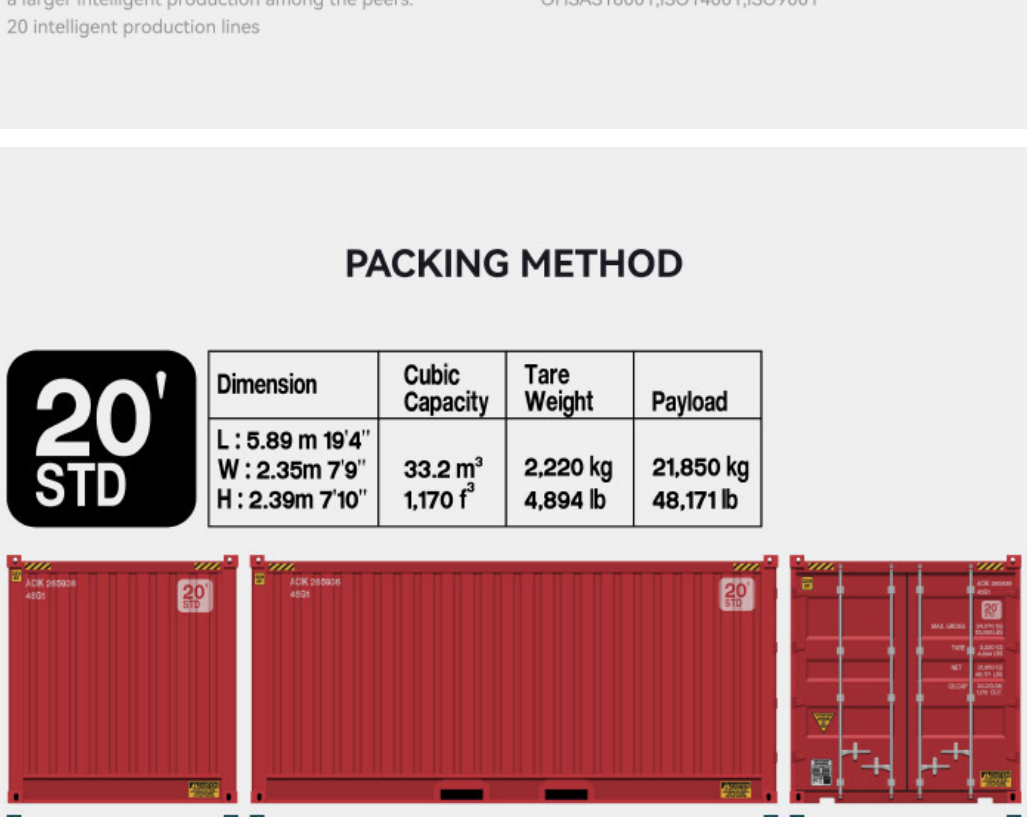


Mature Technology

- 1.Standardized, automated technology design
- 2.Real-time monitoring
- 3.PLC online control
- 4.60 analysis


Equipment Operation

- 1.Famous brands,professional maintenance
- 2.Cutting,edge banding and other links have realized one-stop automatic production and real-time monitoring

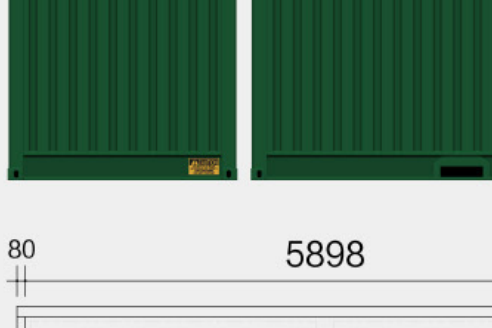

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines

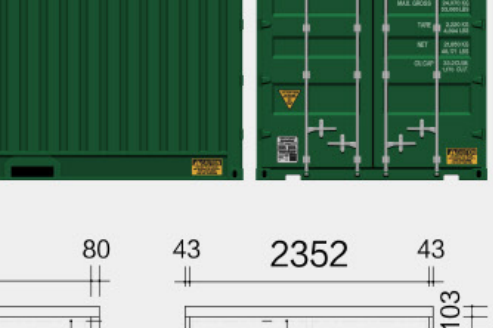


Environment

Keep executing 5S and lean production.
OHSAS18001,ISO14001,ISO9001

PACKING METHOD

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 5.89 m 19'4"	33.2 m³	2,220 kg	21,850 kg
	W : 2.35m 7'9"	1,170 f³	4,894 lb	48,171 lb
	H : 2.39m 7'10"			

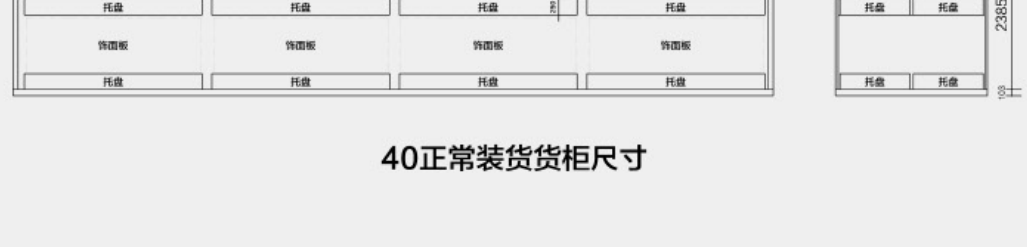

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 12.03m 39'6"	67.7 m³	3,740 kg	26,760 kg
	W : 2.35m 7'9"	2,391 f³	8,245 lb	58,996 lb
	H : 2.39m 7'10"			

