

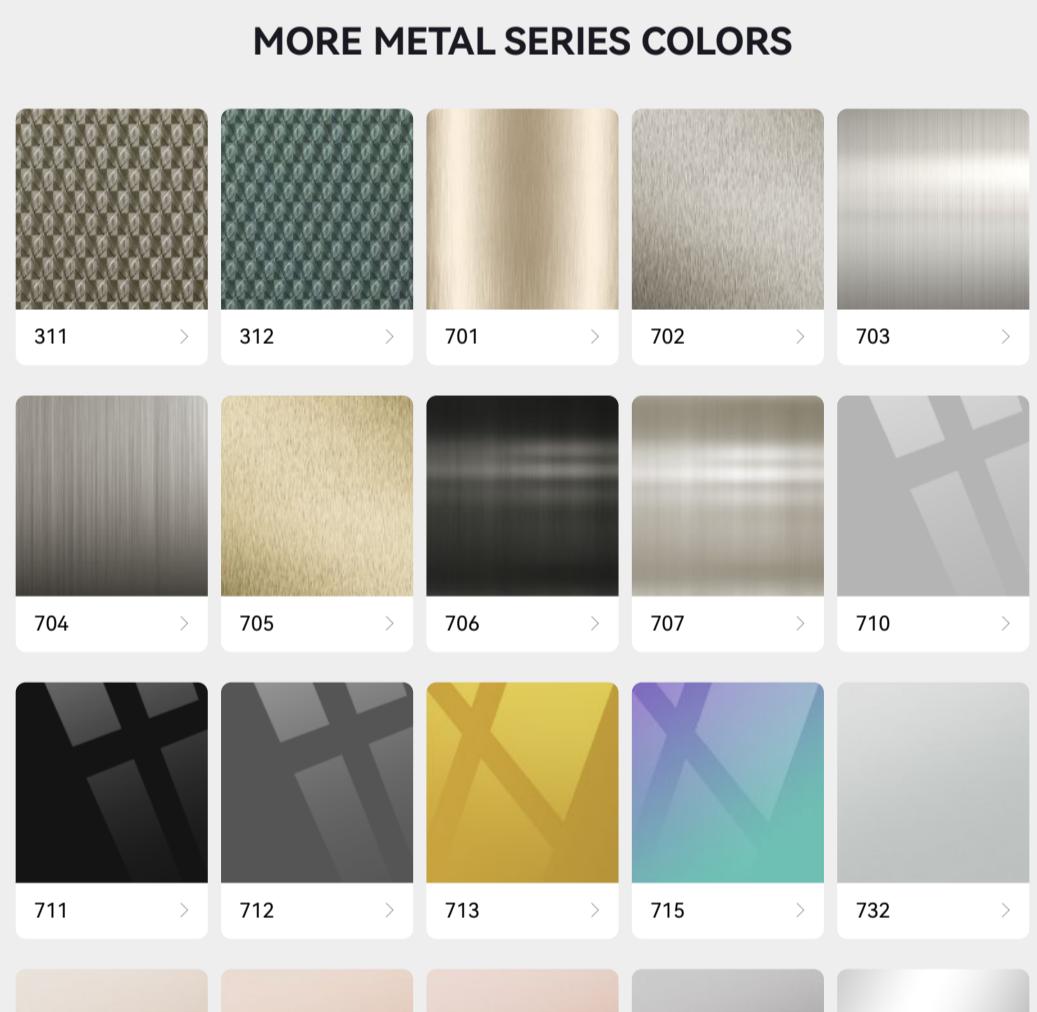


5004

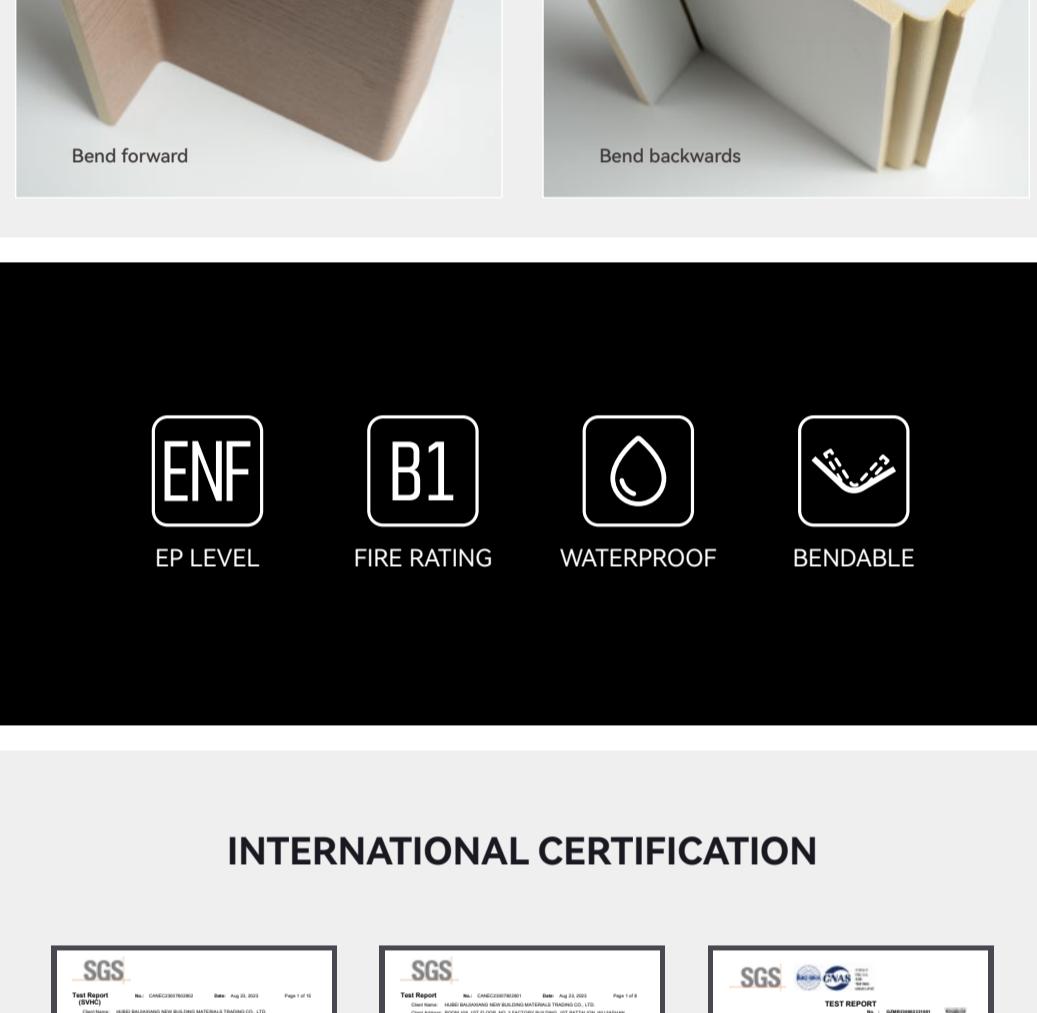

PRODUCT SIZE


Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

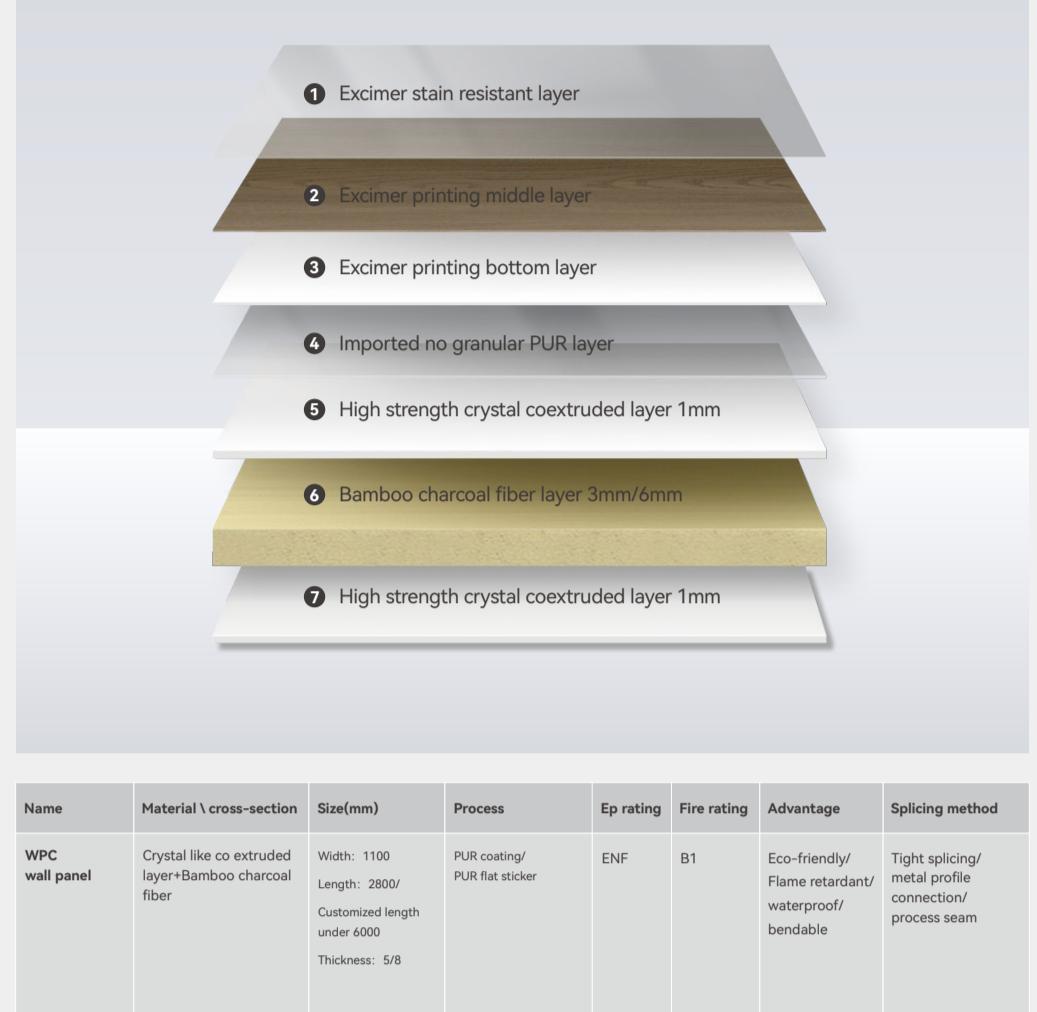

PRODUCT INFORMATION

Name	Material\ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

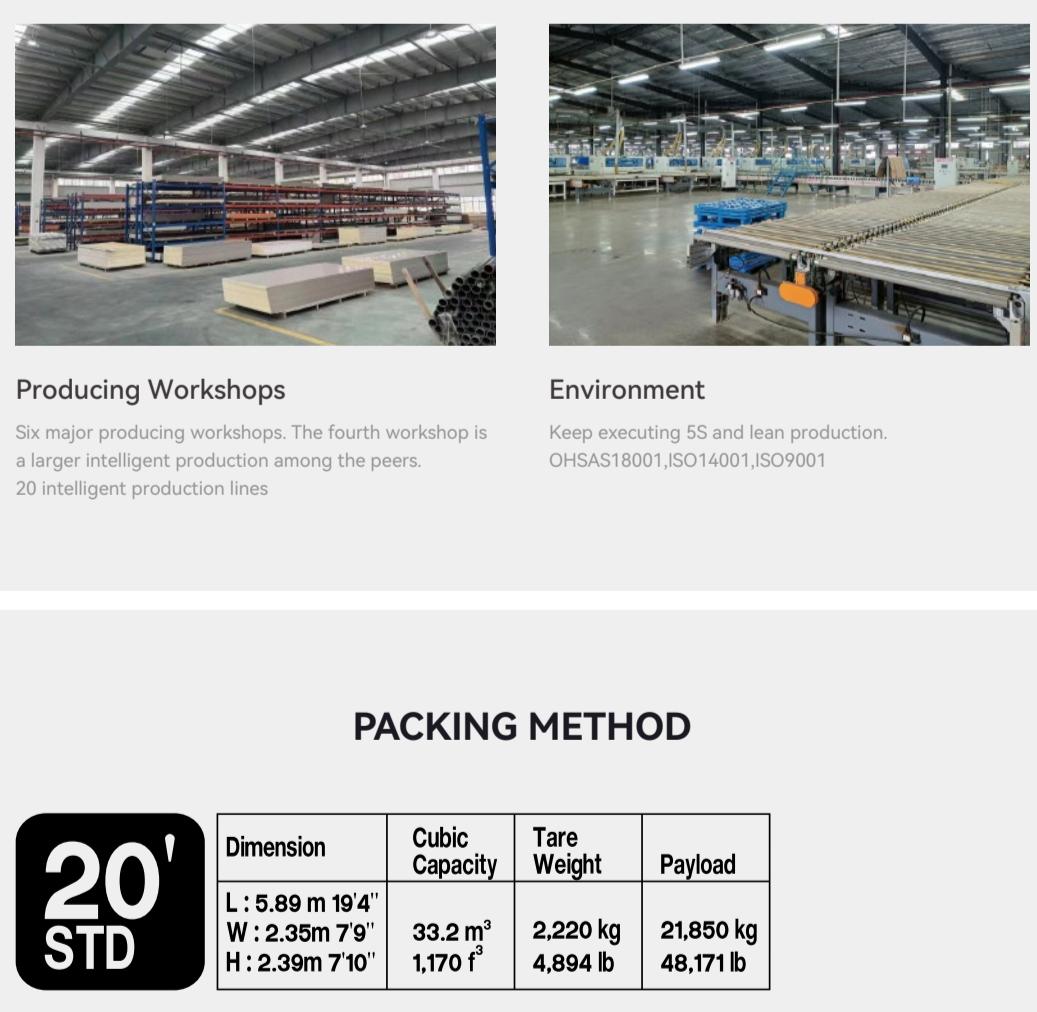

Mature Technology

- 1.Standardized, automated technology design
- 2.Real-time monitoring
- 3.PLC online control
- 4.6.0 analysis

Equipment Operation

- 1.Famous brands, professional maintenance
- 2.Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers. 20 intelligent production lines


Environment

Keep executing 5S and lean production. OHSAS18001,ISO14001,ISO9001

PACKING METHOD

20'
STD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4" W : 2.35m 7'9" H : 2.39m 7'10"	33.72 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

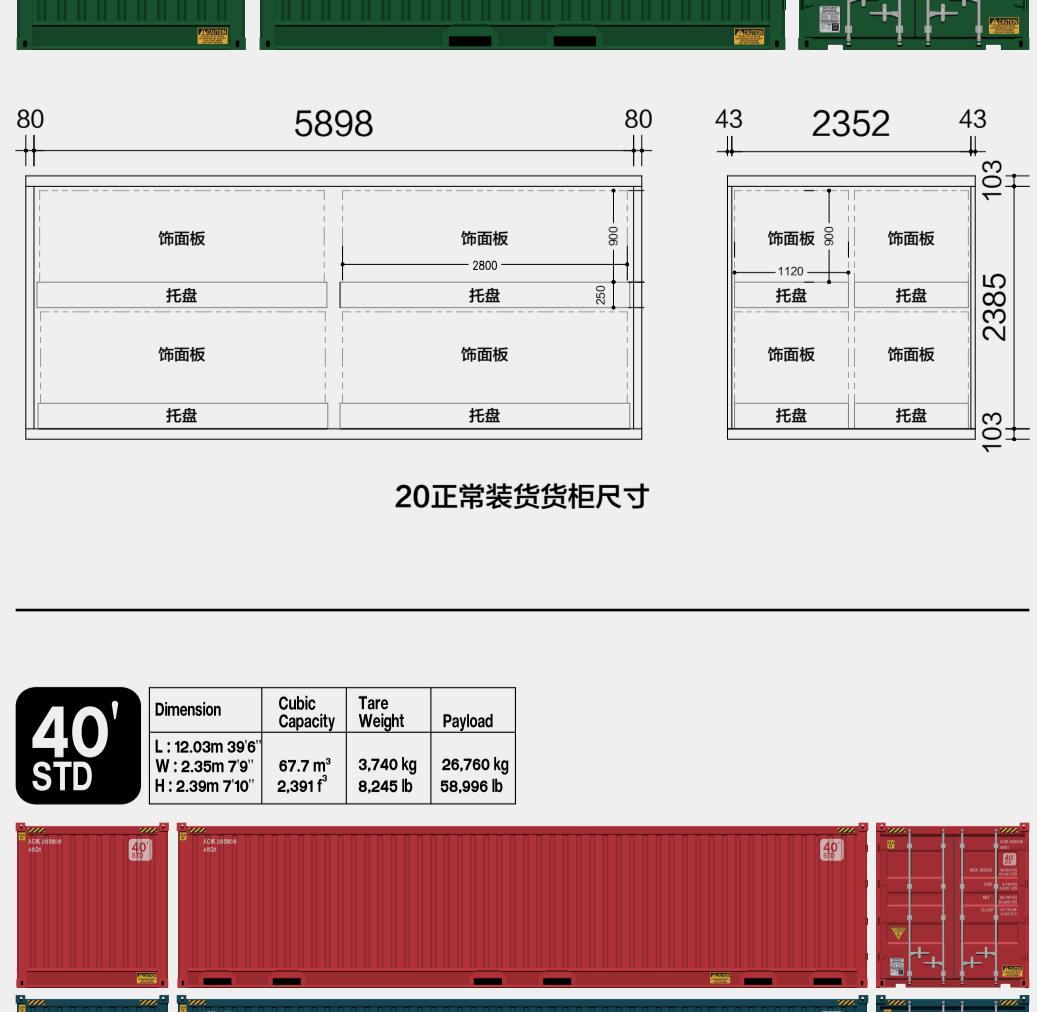

20正常装货柜尺寸

40'
STD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'8" W : 2.35m 7'9" H : 2.39m 7'10"	67.7 m ³ 2,311 f ³	3,740 kg 8,245 lb	26,760 kg 58,996 lb

40正常装货柜尺寸