



# 51006

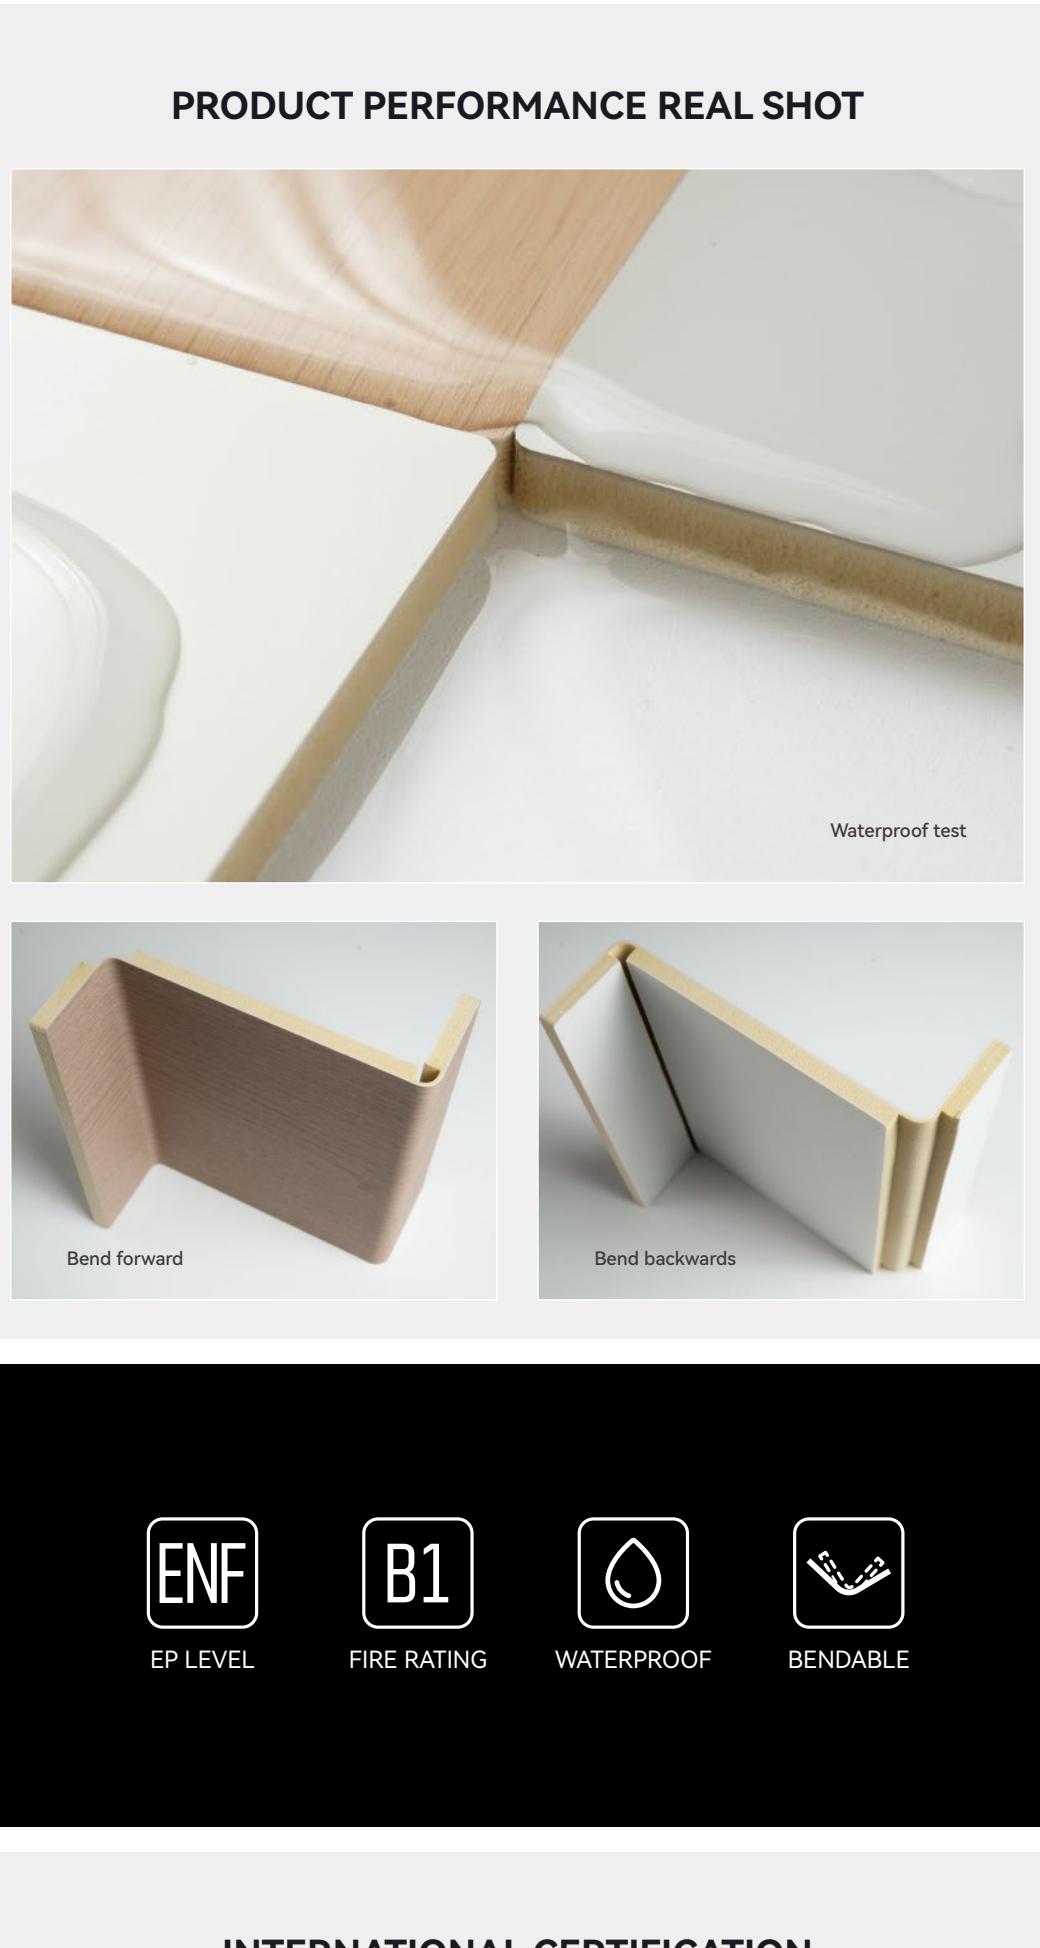


## PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm




## PRODUCT INFORMATION

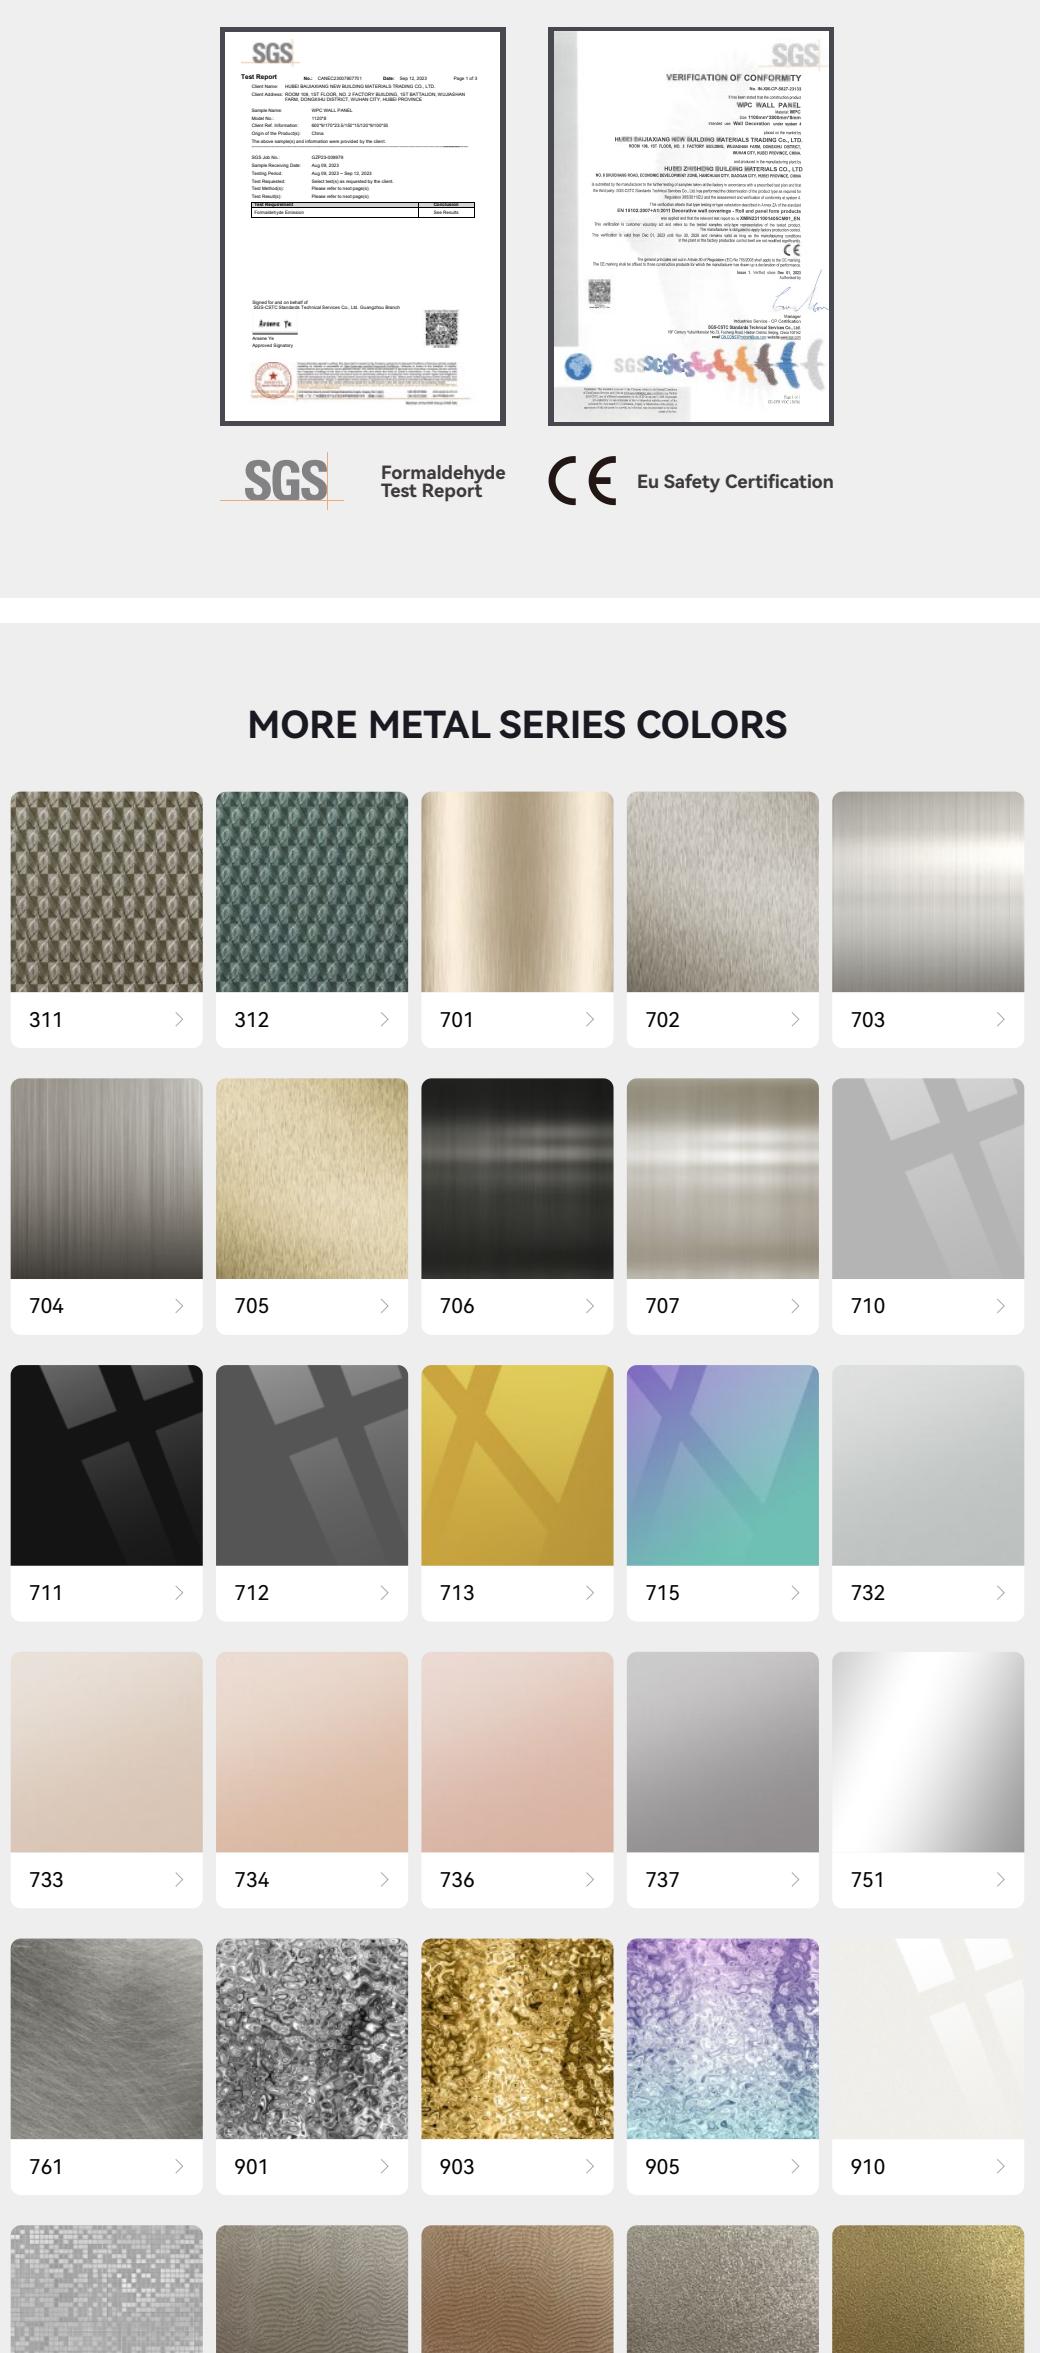

Name	Material\cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

## PRODUCT PERFORMANCE REAL SHOT

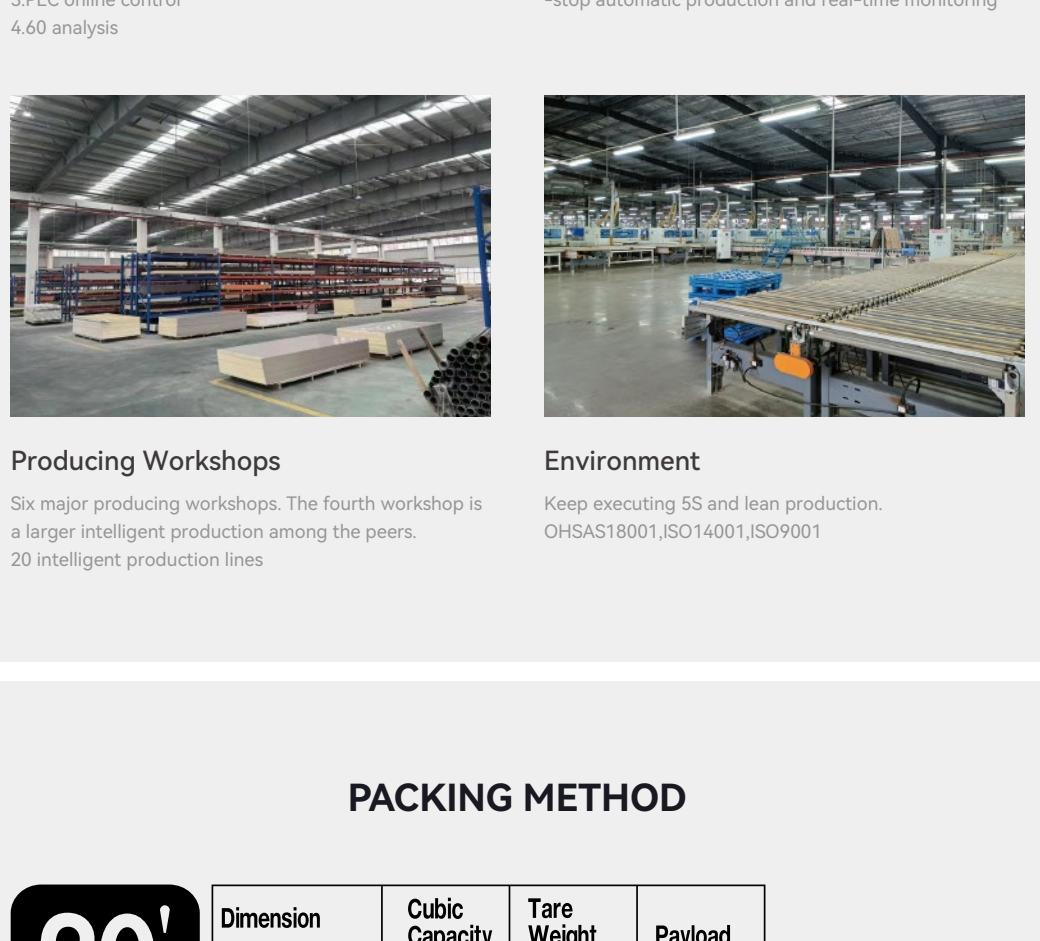

### Mature Technology

1.Standardized, automated technology design

2.Real-time monitoring

3.PLC online control

4.60 analysis

### Equipment Operation

1.Famous brands,professional maintenance



2.Cutting,edge banding and other links have realized one-stop automatic production and real-time monitoring



## PACKING METHOD

### 20 STD


Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4" W : 2.35m 7'9" H : 2.30m 7'10"	33.2 m <sup>3</sup> 1,170 f <sup>3</sup>	2,220 kg 4,894 lb	21,850 kg 48,171 lb

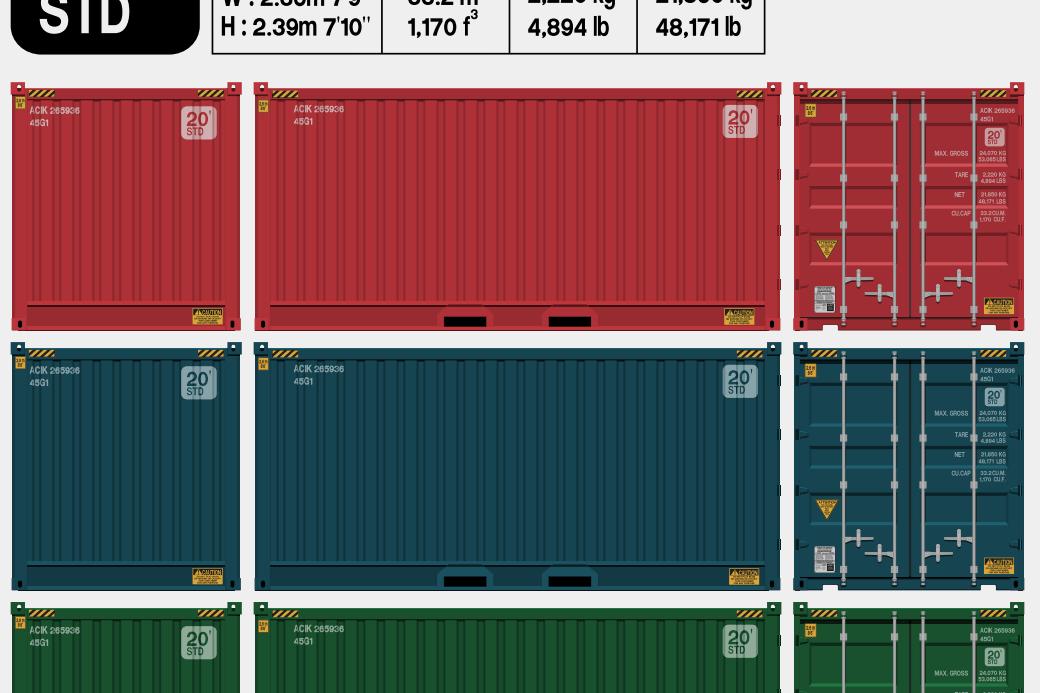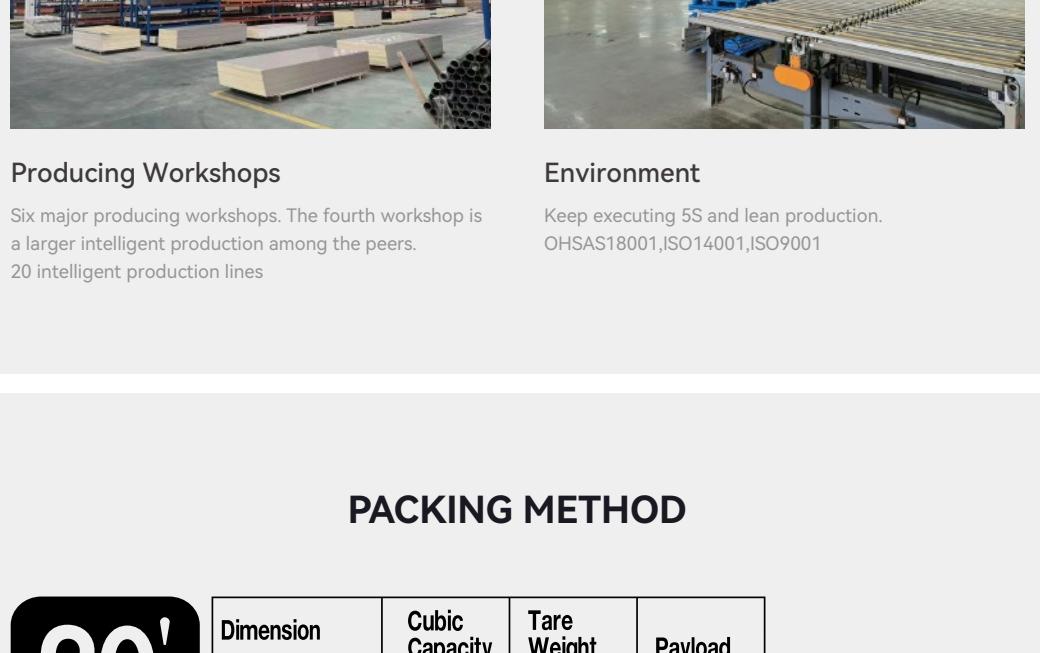

20正常装货柜尺寸

### 40 STD

Dimension	Cubic Capacity	Tare Weight	Payload
L :12.03m 39'6" W :2.35m 7'9" H : 2.30m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb

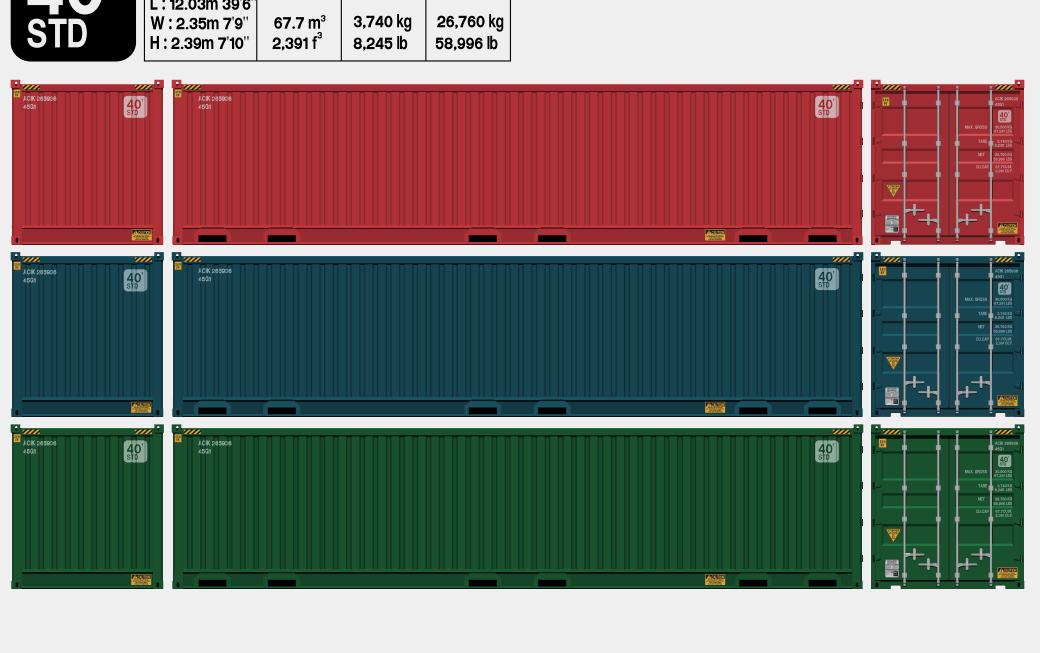

40正常装货柜尺寸