



YW 1803

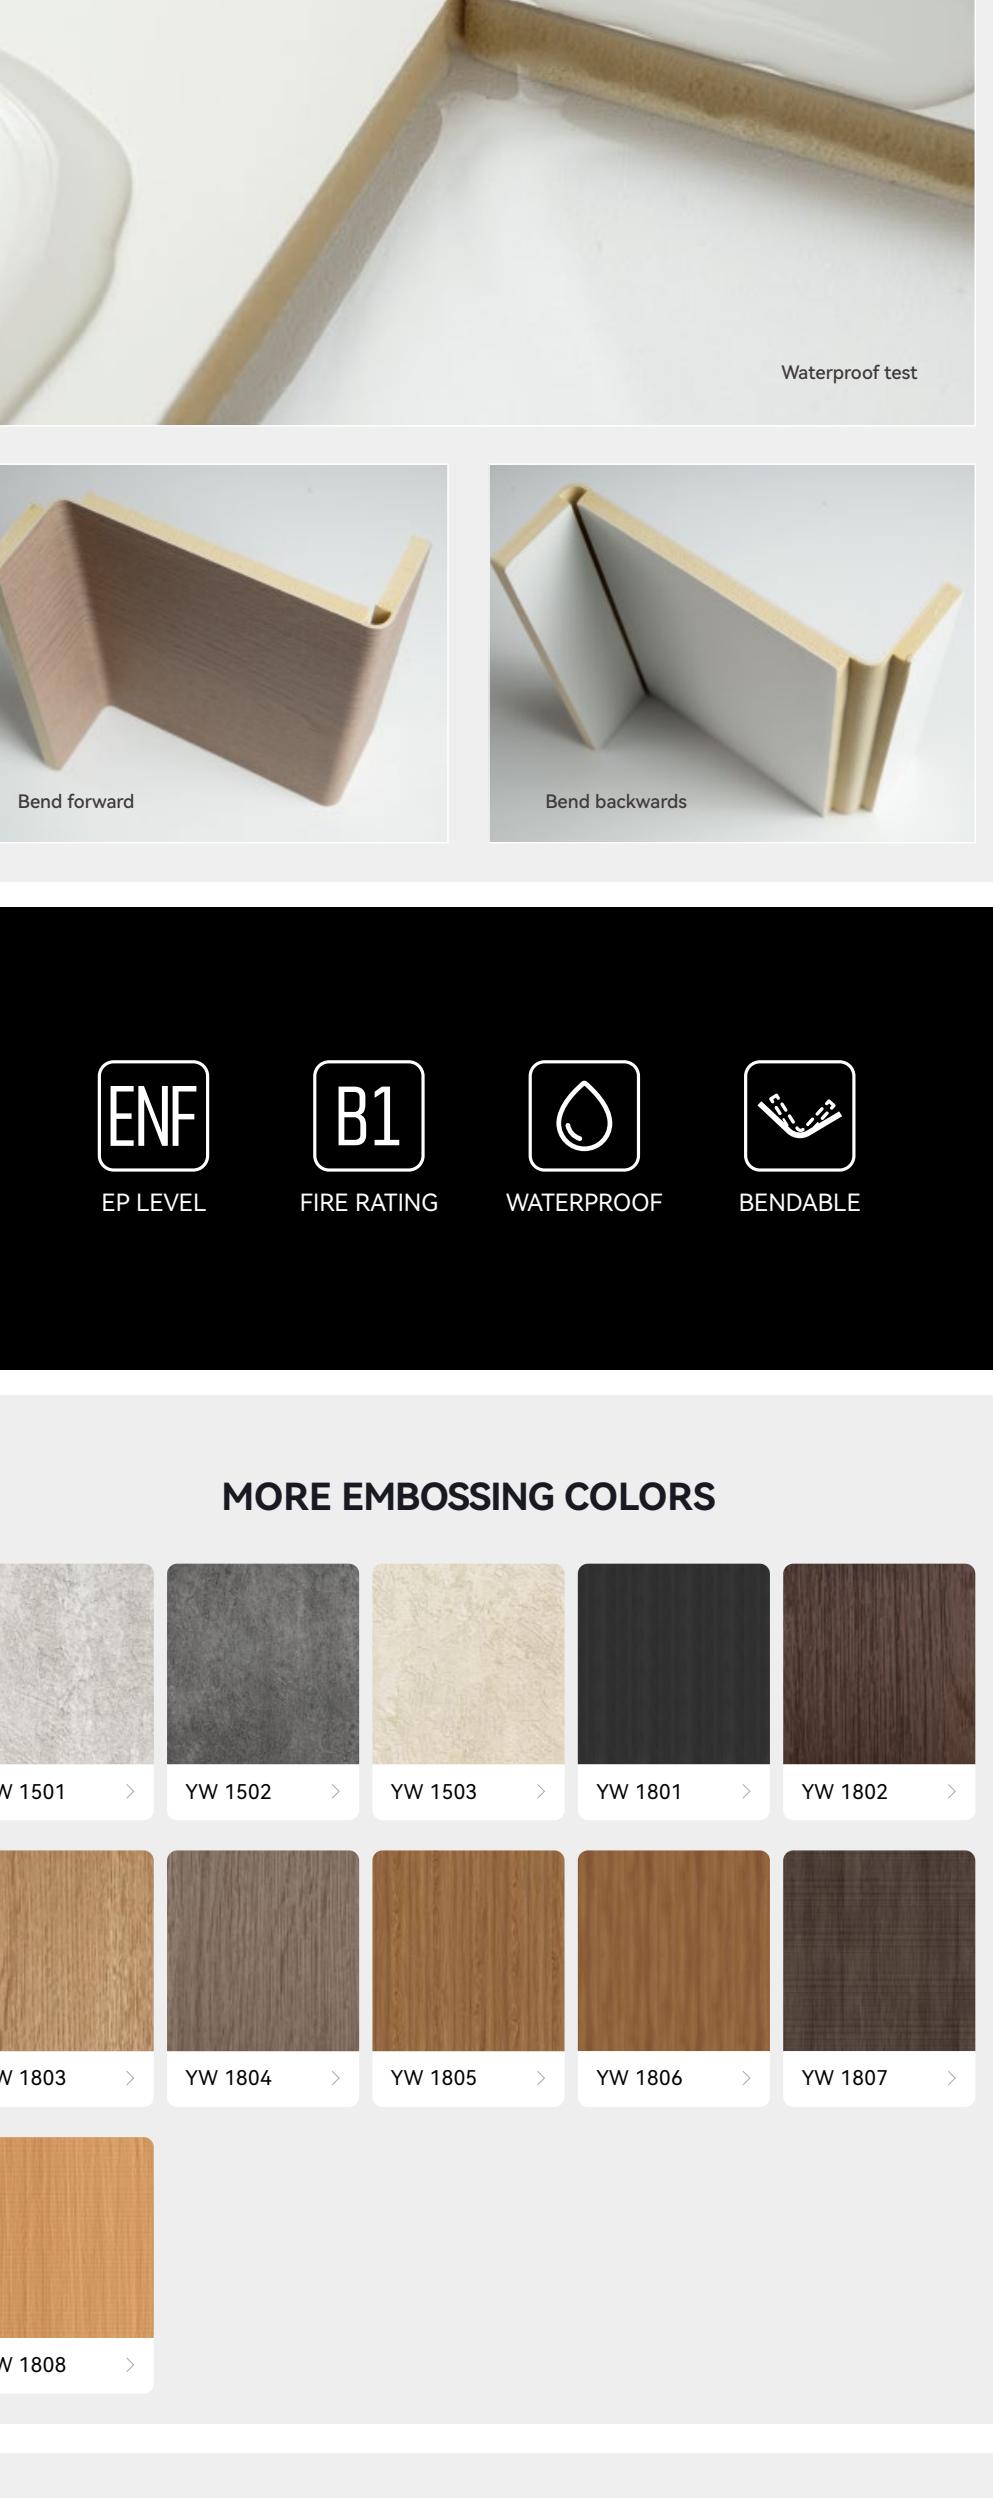


PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

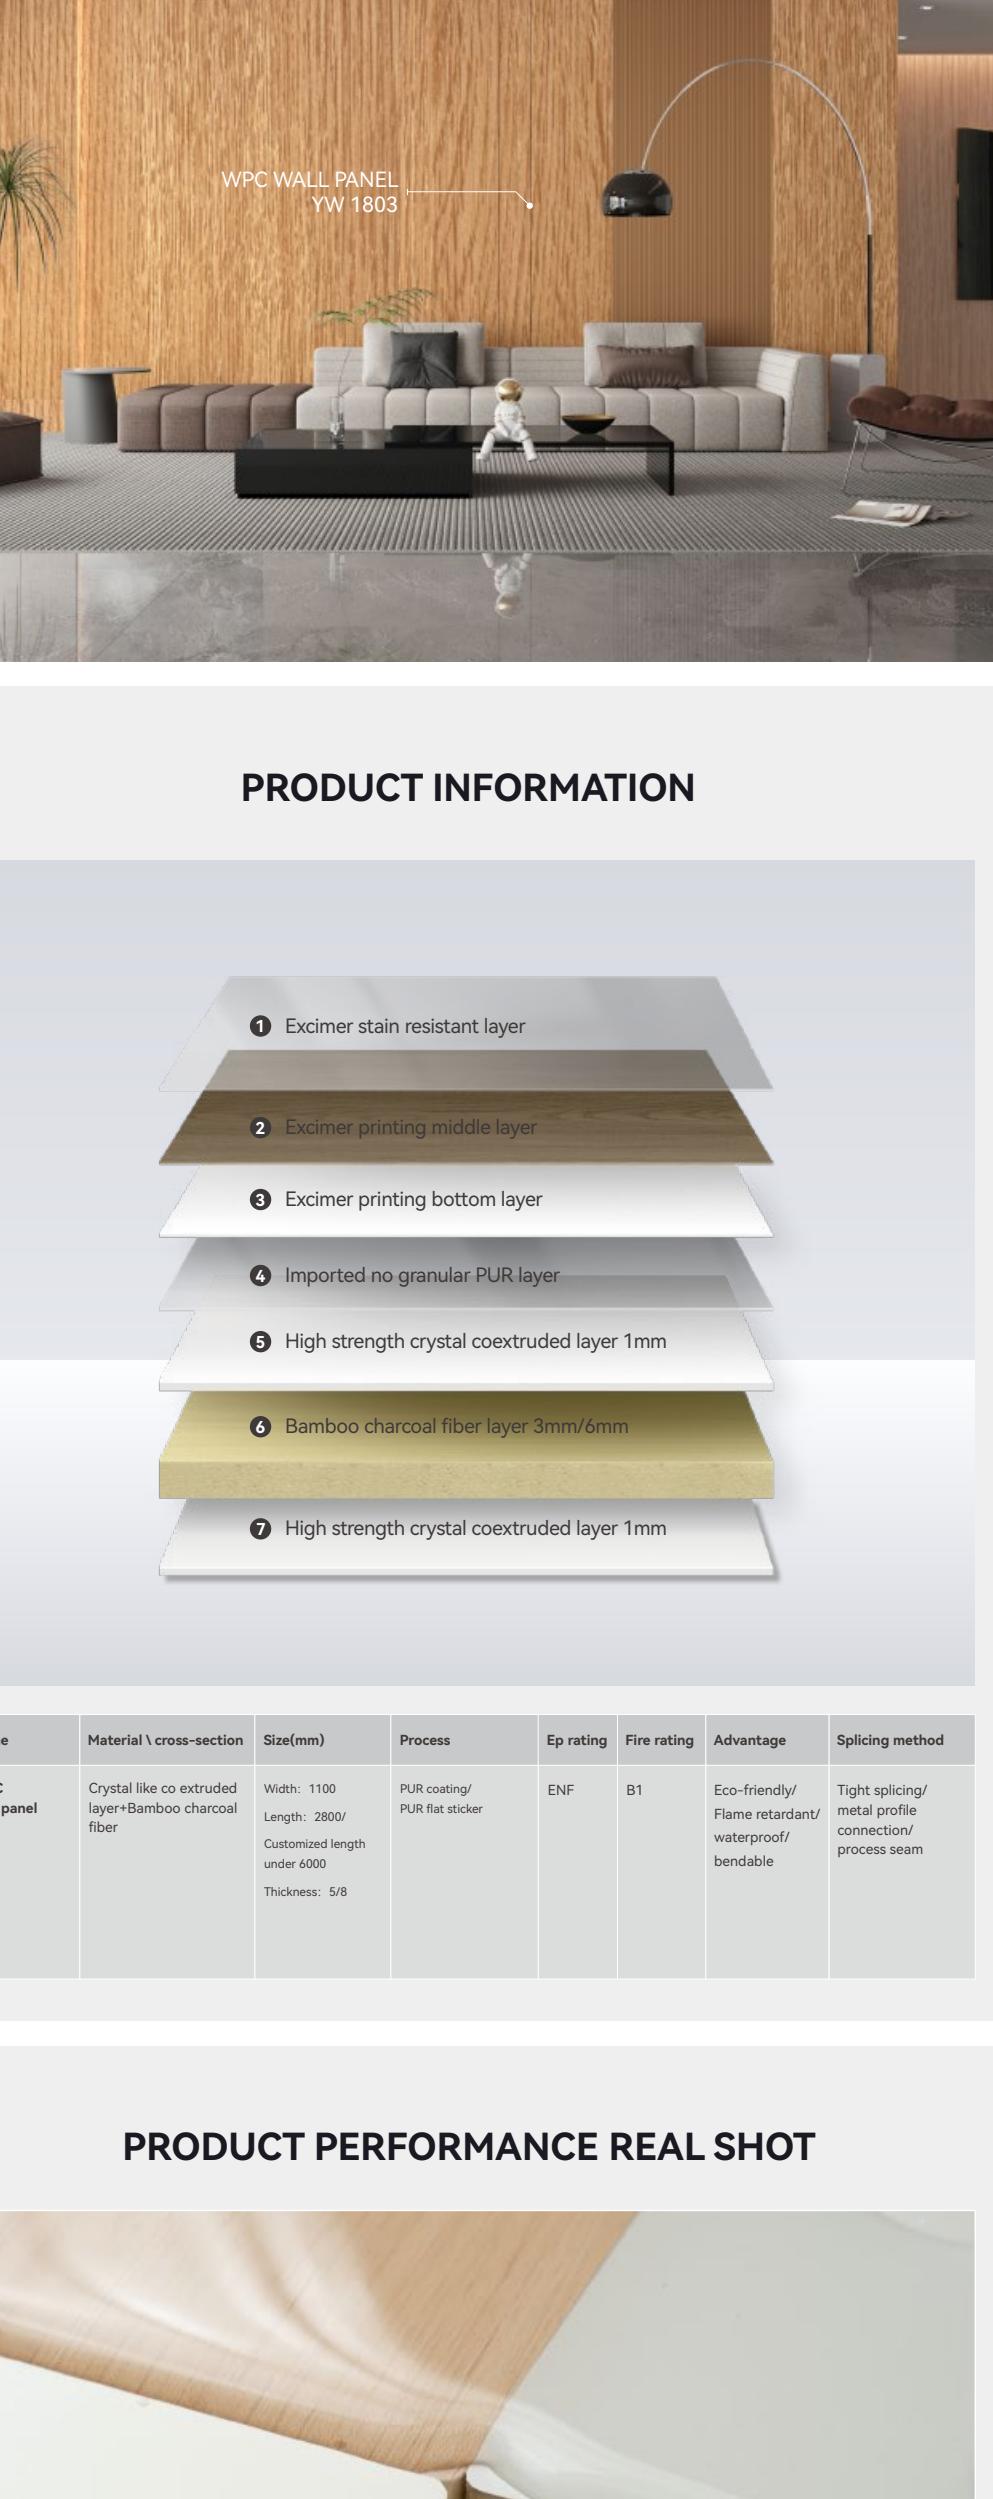


PRODUCT INFORMATION

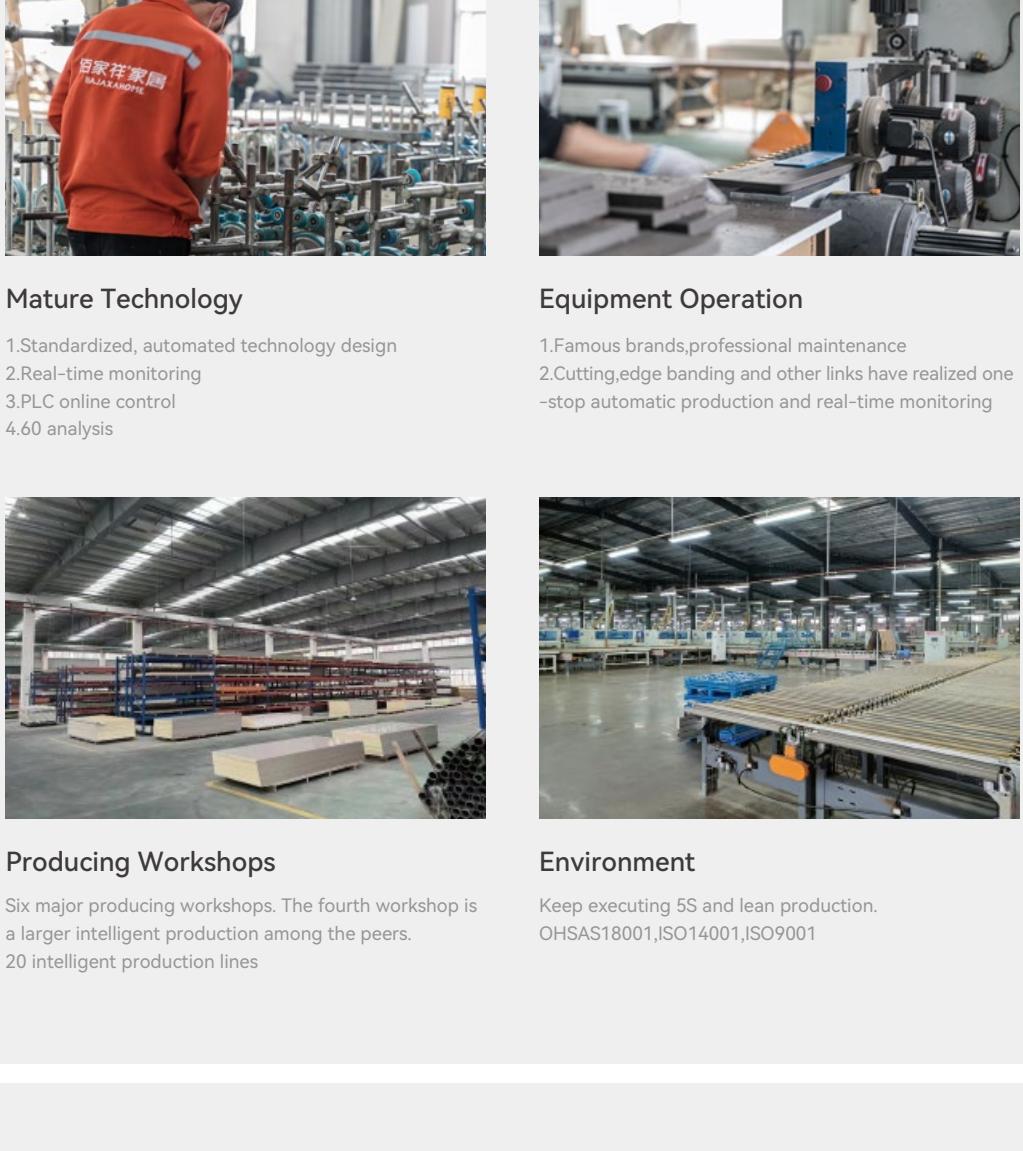

Name	Material/cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

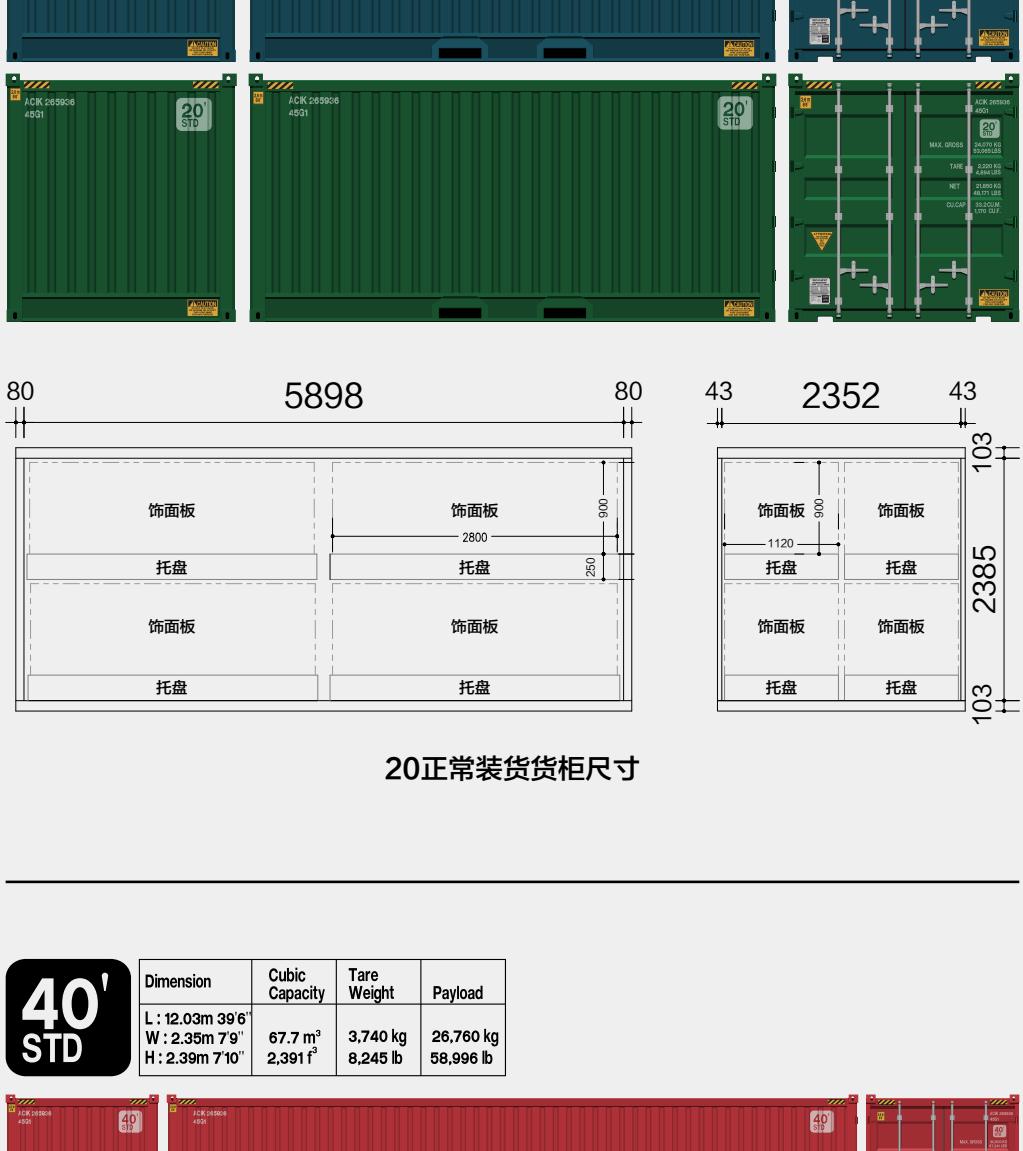

20'
STD

Dimension

Cubic Capacity

Tare Weight

Payload

L : 5.89m 19'4"

33.2 m³

2,220 kg


21,850 kg

W : 2.35m 7'9"

1,170 f³

4,894 lb

48,171 lb

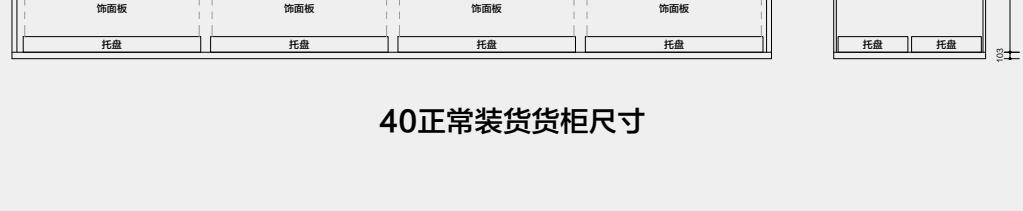

20正常装货柜尺寸

40'
STD

Dimension

Cubic Capacity

Tare Weight

Payload

L : 12.03m 39'6"

67.7 m³

3,740 kg

26,760 kg

W : 2.35m 7'9"

8.245 f³

58,996 kg

H : 2.39m 7'10"

8.245 f³

48,171 lb

40正常装货柜尺寸