


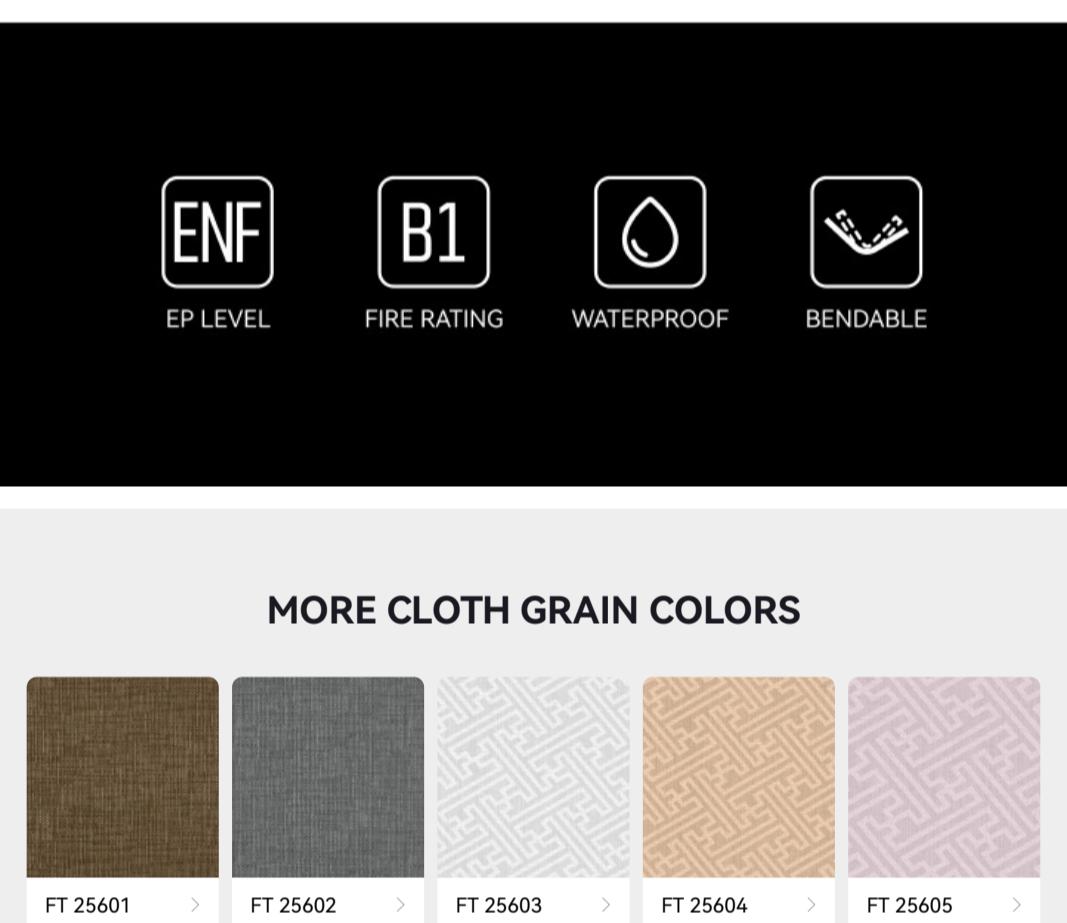
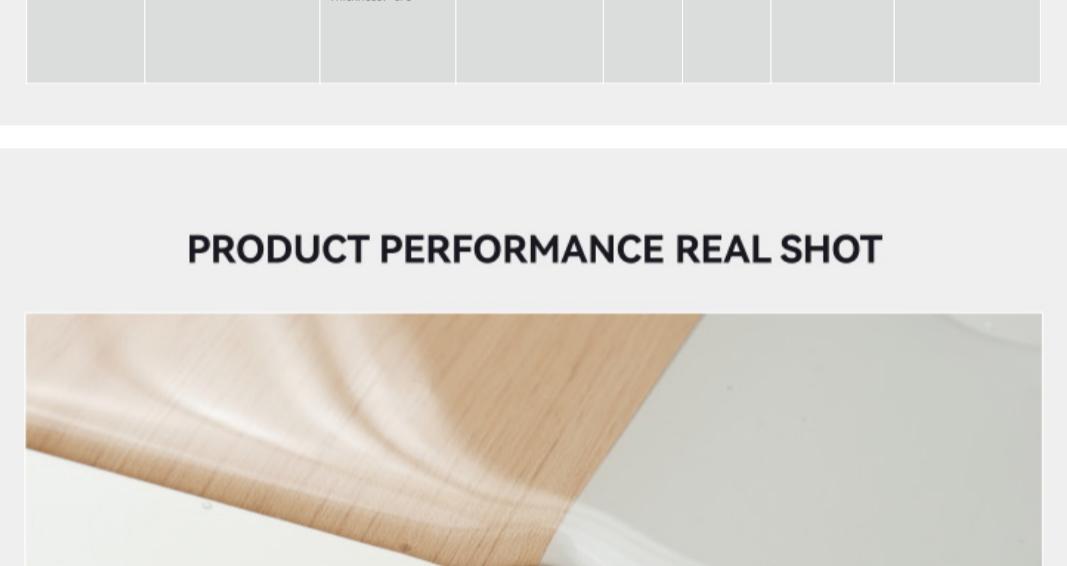


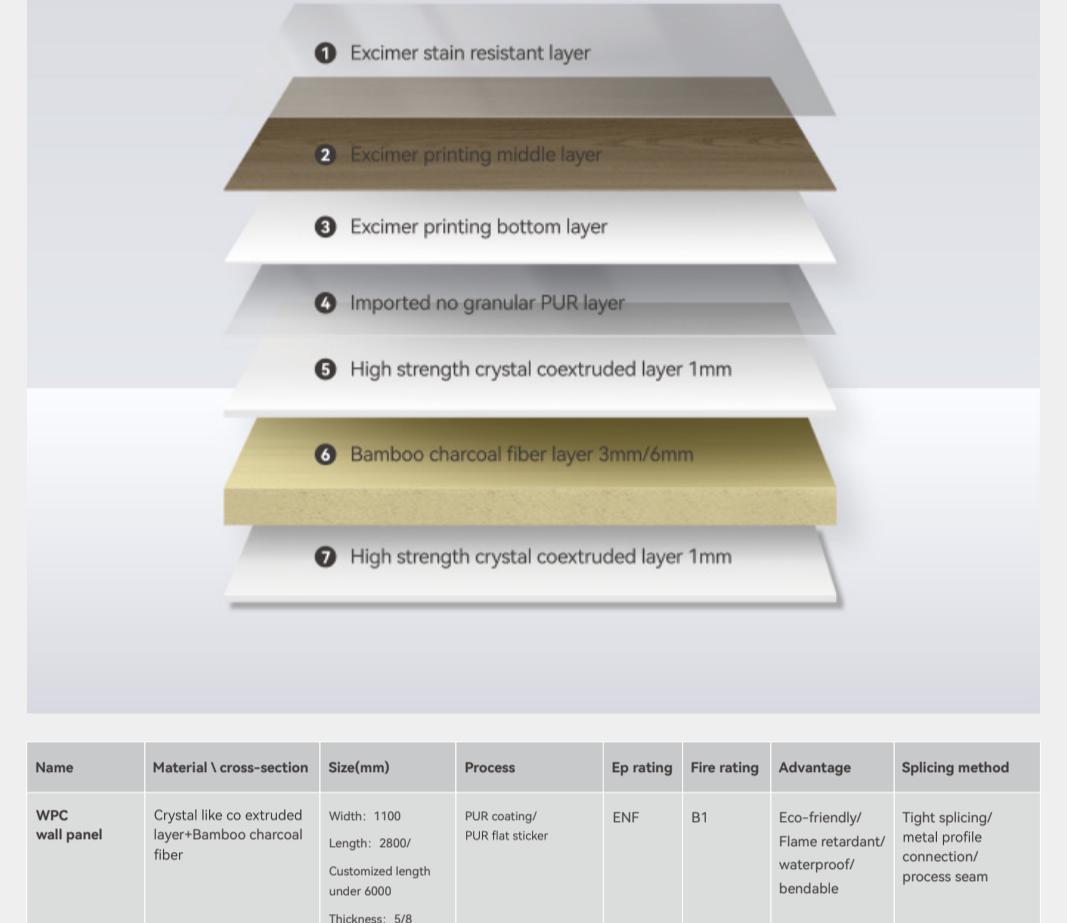

**6080**  
COLOR NUMBER


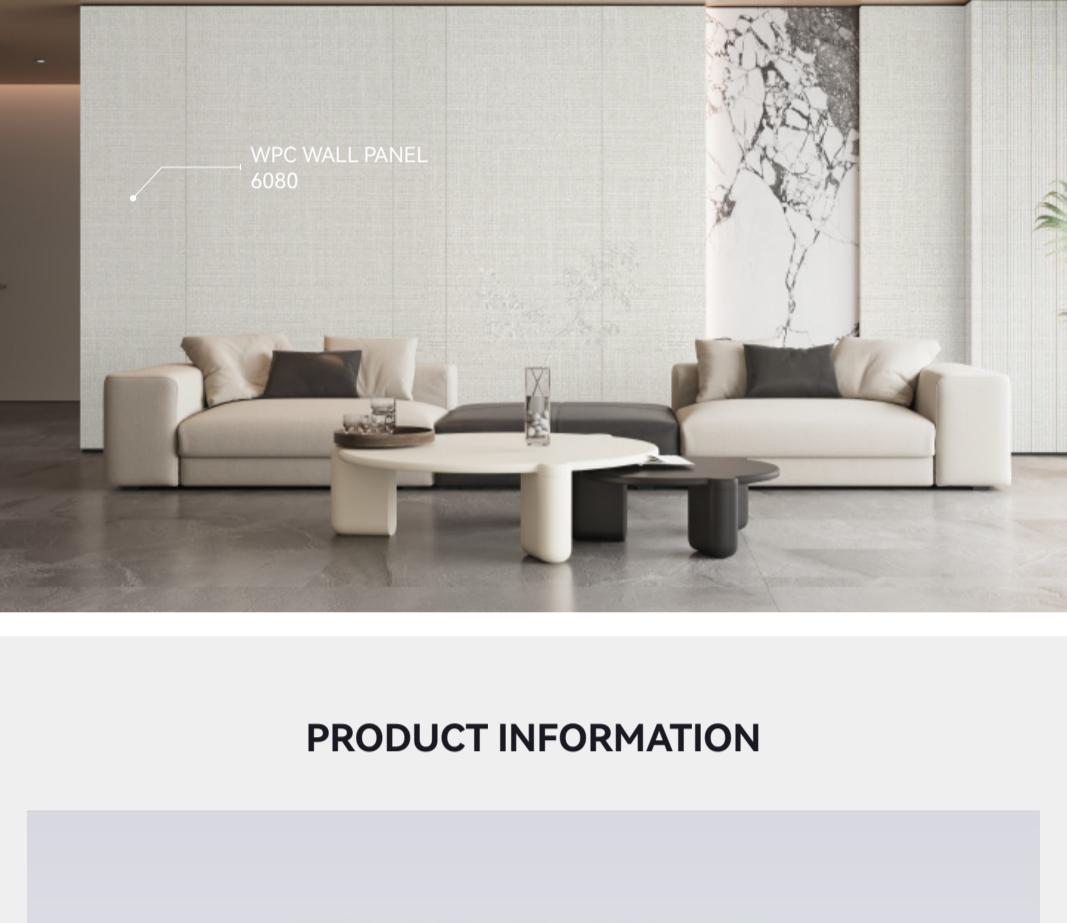


## PRODUCT INFORMATION

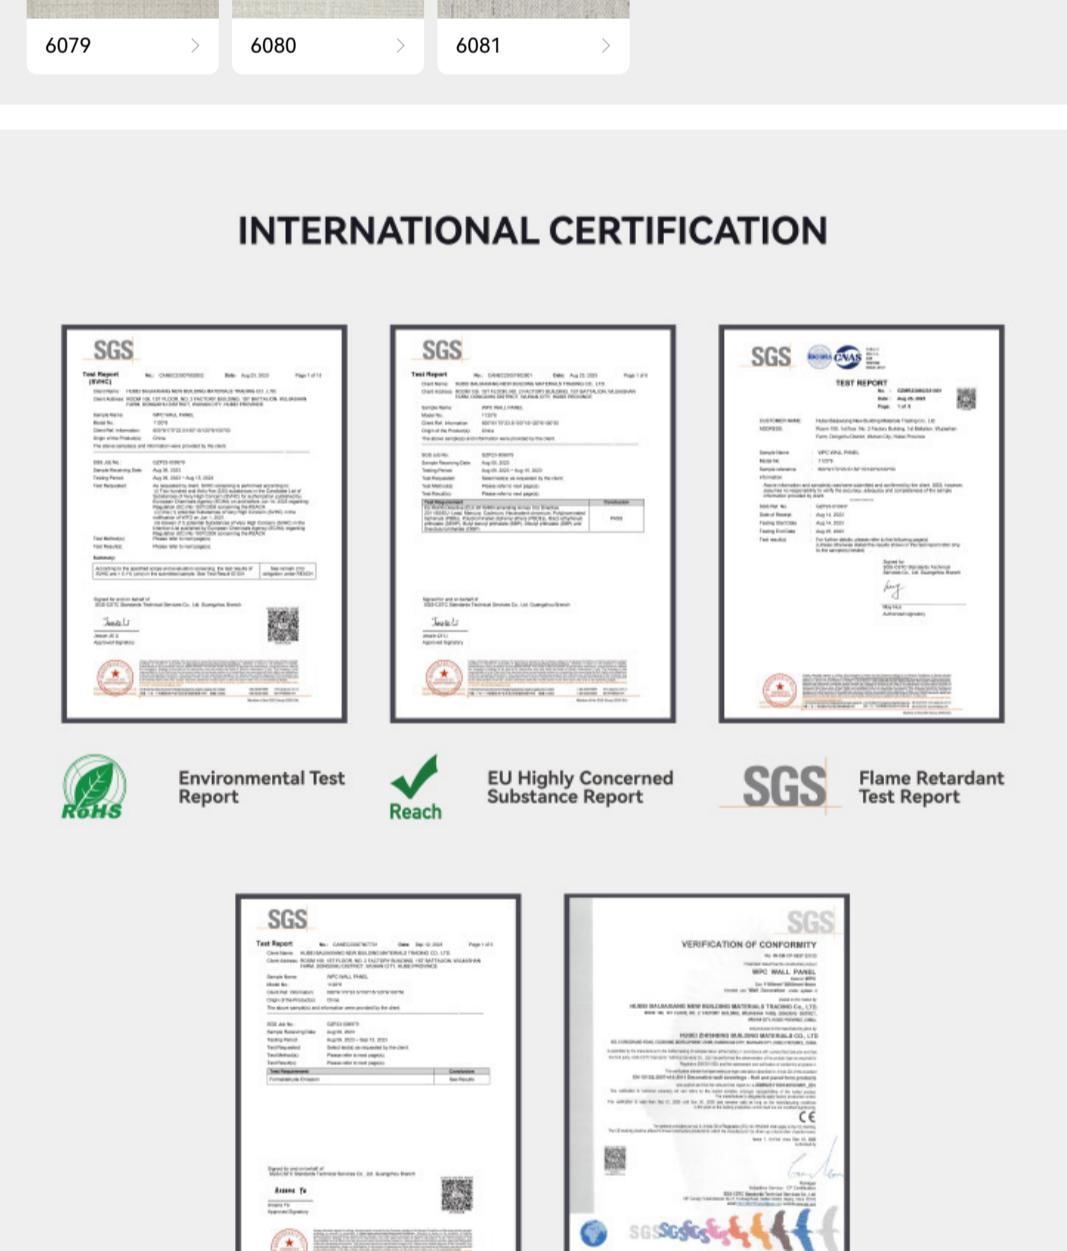


Name	Material\ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

## PRODUCT PERFORMANCE REAL SHOT

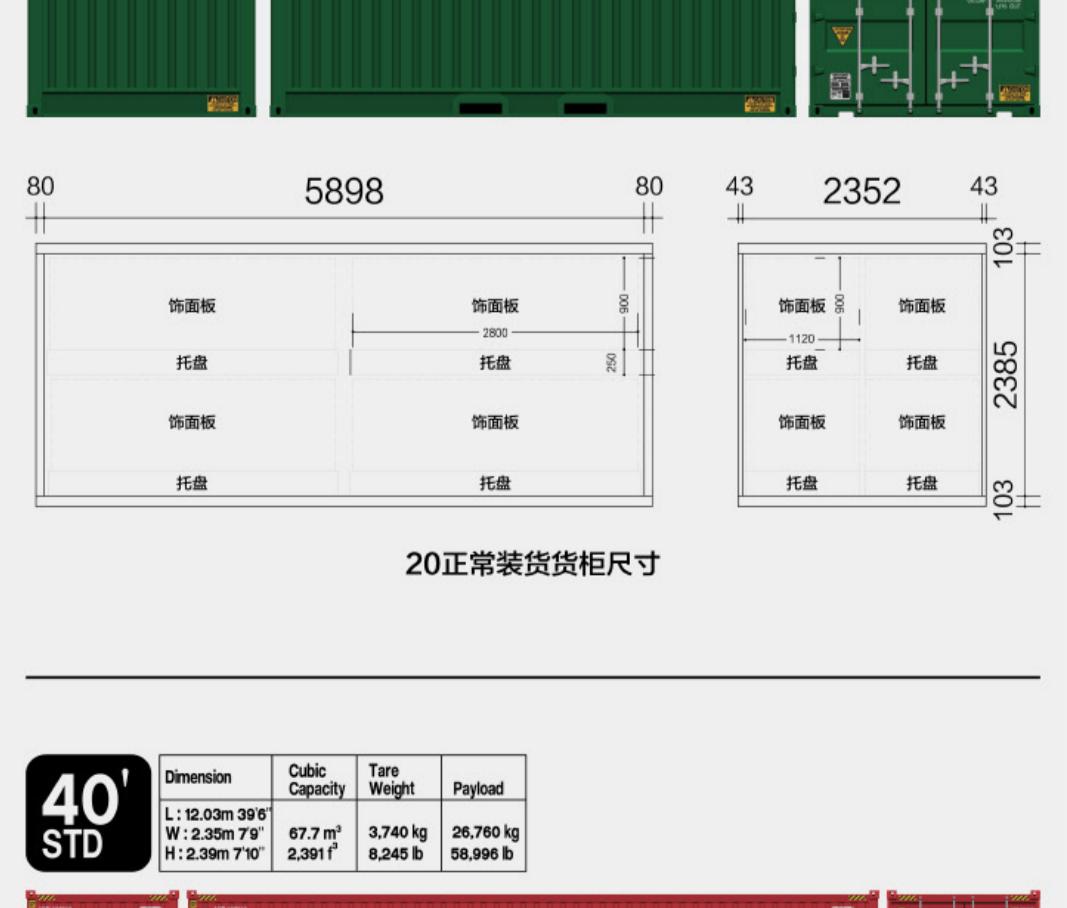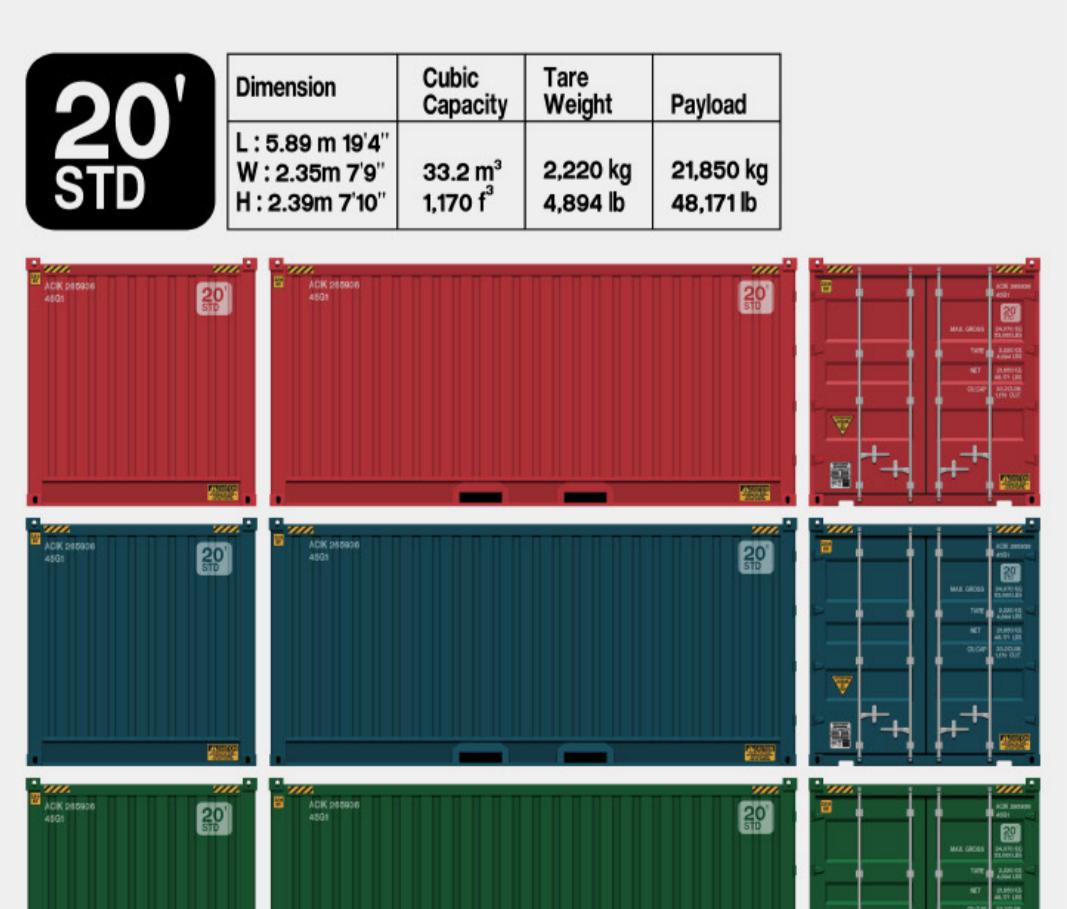

## FACTORY STRENGTH

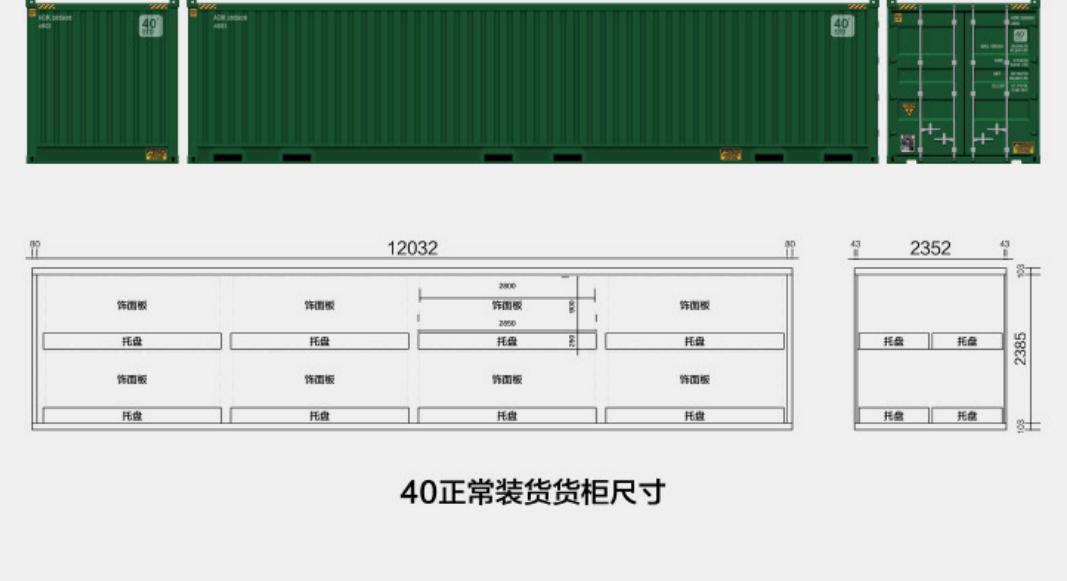

## PACKING METHOD

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 5.89 m 19'4" W: 2.35m 7'9" H: 2.39m 7'10"	33.2 m <sup>3</sup> 1,170 f <sup>3</sup>	2,220 kg 4,894 lb	21,850 kg 48,171 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
---------	-----------	----------------	-------------	---------