

Official website QR code

BAIJAX®

2025 | VERSION 04



PRODUCT INFORMATION BOOK

CATALOGUE



01

HD Printing Wall Panel

02

SPC Background
Wall Panel

03

Anti-Collision
Wall Panel

04

WPC Wall Panel

05

WPC Splicing
Wall Panel

06

Carbon Crystal
Wall Panel

07

Fireproof Wall Panel

08

Fluted Wall Panel

09

MS Flat Door

10



M16 Aluminum Framed Door

11

Cultured Stone

01

HD PRINTING WALL PANEL

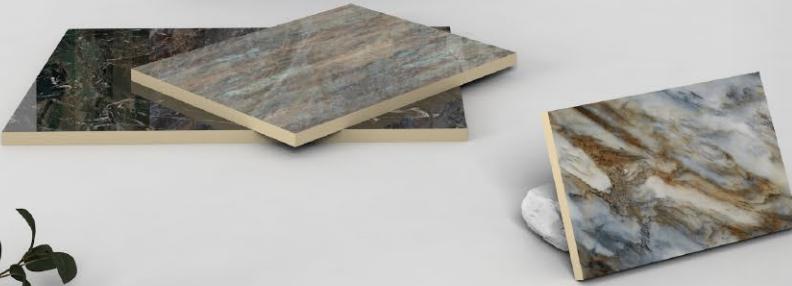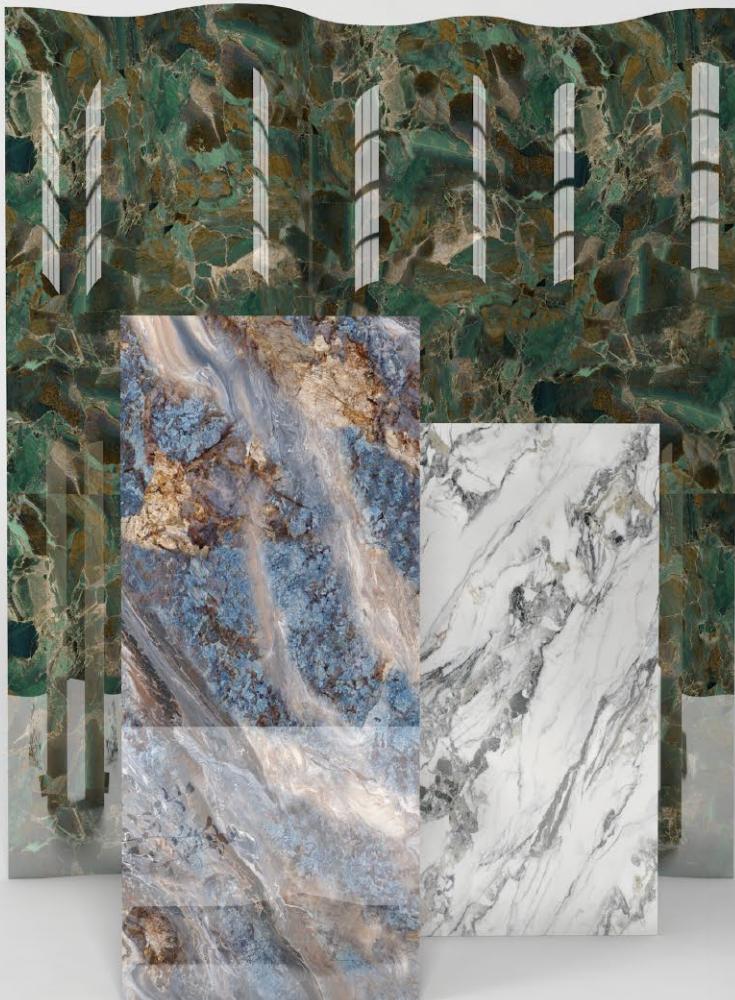

EP LEVEL



FIRE RATING




WATERPROOF



BENDABLE

PRODUCT STRUCTURE DIAGRAM

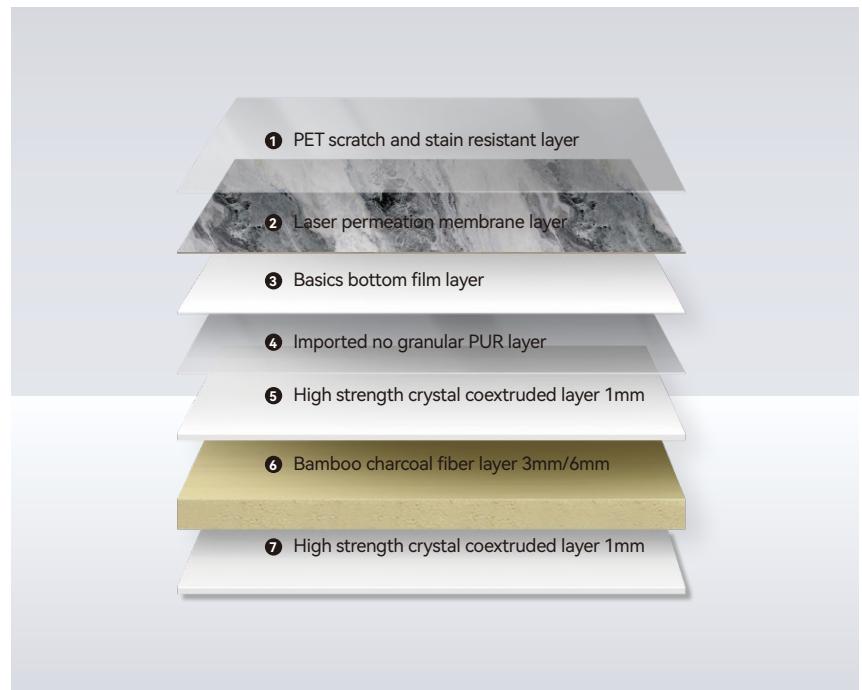

PRODUCT INFORMATION

Size(mm)	Thickness
Width: 1100 / Customized width within 1100 Length: 2800 / Customized lengths within 2800	5/8mm
Material \ cross-section	EP level
WPC+PETG	E0
Advantage	Fire rating
Eco-friendly/Flame retardant/Waterproof/Bendable	B1
Splicing method	Surface technology
Tight splicing/Metal profile connection	Glossy PETG / Matte PETG

PRODUCT PERFORMANCE REAL SHOT



Glossy PETG



Matte PETG



CASE APPRECIATION

Taking the mountains, rivers, rocks and sea as creative design inspiration.

HD PRINTING WALL PANEL

PARTIAL PRODUCT PATTERN

For more color details, please find the product catalog




NP 24001



NP 24002



NP 24005

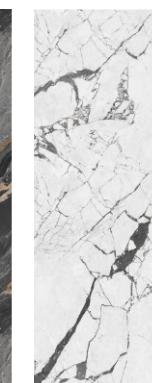

9039



9008



NP 24006



NP 24007



NP 24010



NP 24011



NP 24013



NP 24014



NP 24015




NP 24017



NP 24018



NP 24019

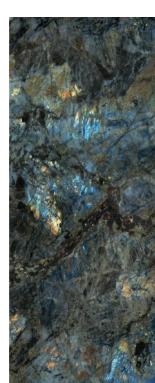

NP 24023



NP 24030



NP 24038




NP 24039



NP 24903

02

SPC BACKGROUND PAINTING

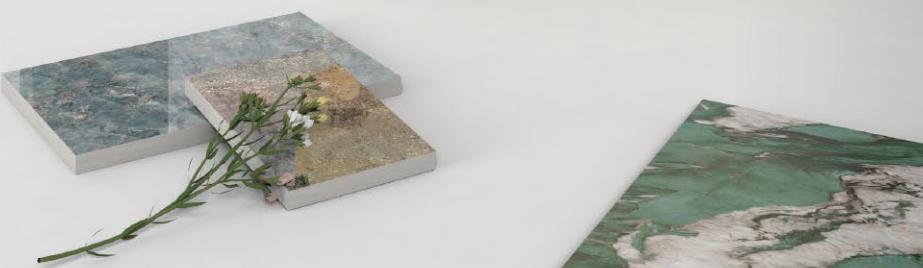

E0



B1




WATERPROOF



BENDABLE


PRODUCT STRUCTURE DIAGRAM

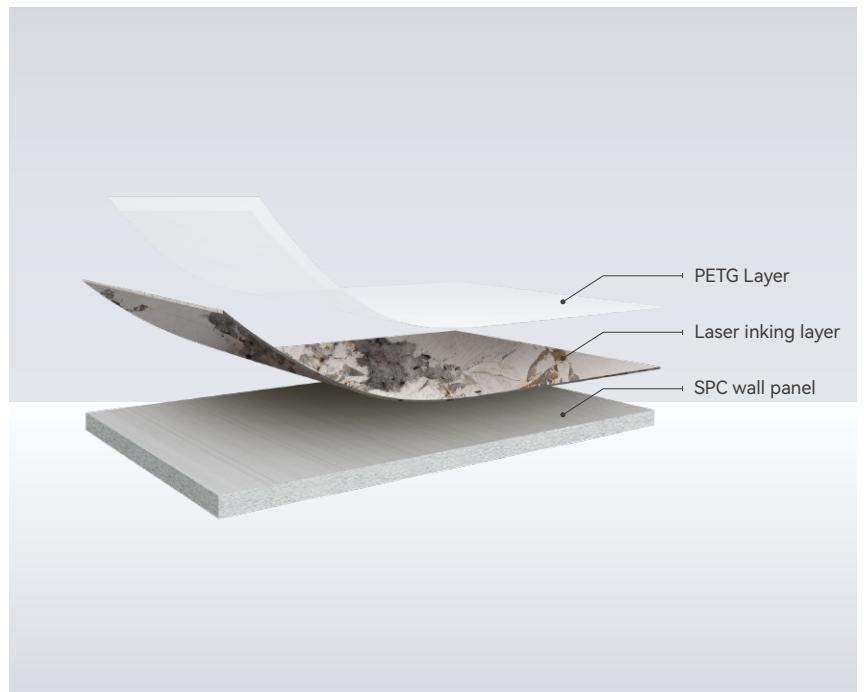

PRODUCT INFORMATION

Size(mm)	Thickness
Width: 1100 Length: 2800	5mm
Material \ cross-section	EP level
SPC+PETG	E0
Advantage	Fire rating
Waterproof/Bendable	B1
Splicing method	Surface technology
Tight splicing/Metal profile connection	Laser inking

PRODUCT PERFORMANCE REAL SHOT

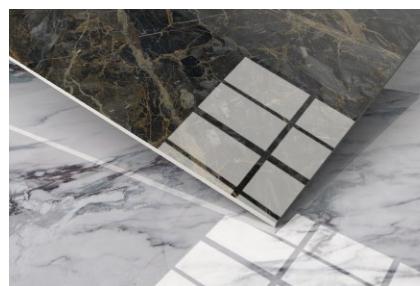

Glossy PETG



Matte PETG






CASE APPRECIATION

Innovative research and development to meet the new generation of "tide products".
Let the beauty of art into thousands of households.

SPC BACKGROUND PAINTING

PARTIAL PRODUCT PATTERN

For more color details, please find the product catalog

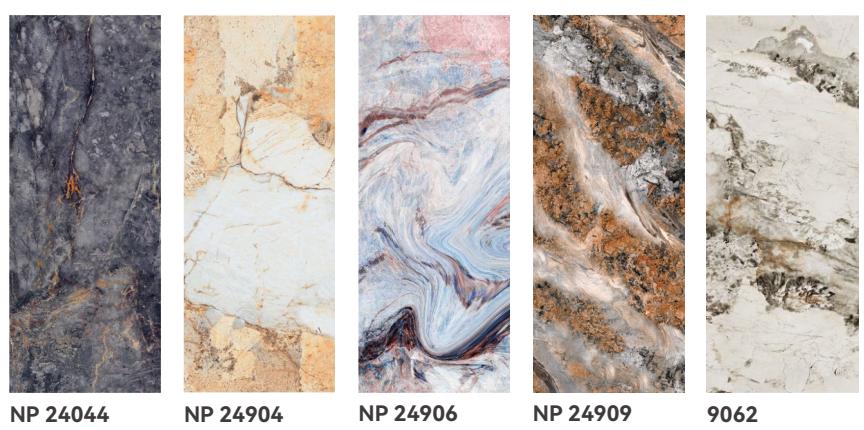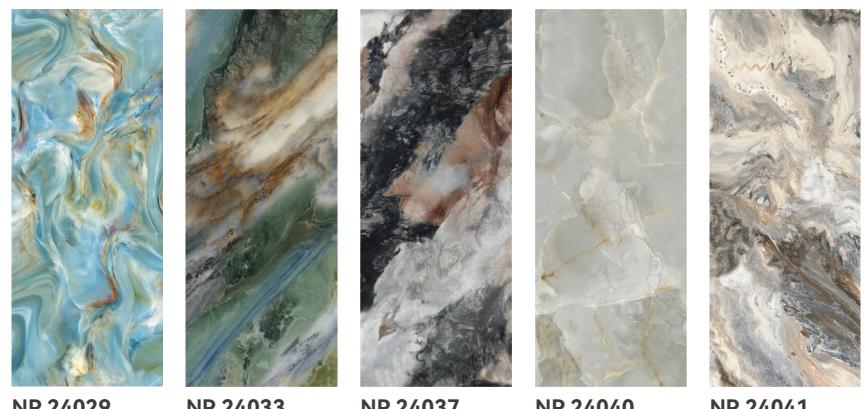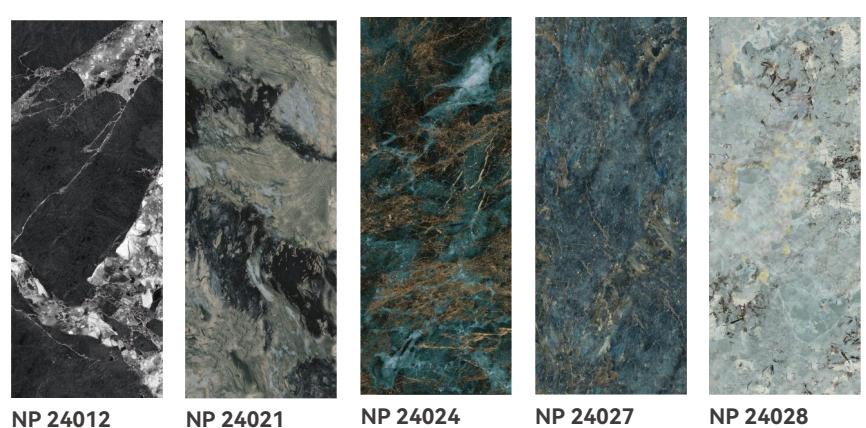

03

ANTI-COLLISION WALL PANEL



EP LEVEL



FIRE RATING




WATERPROOF



BENDABLE

PRODUCT STRUCTURE DIAGRAM

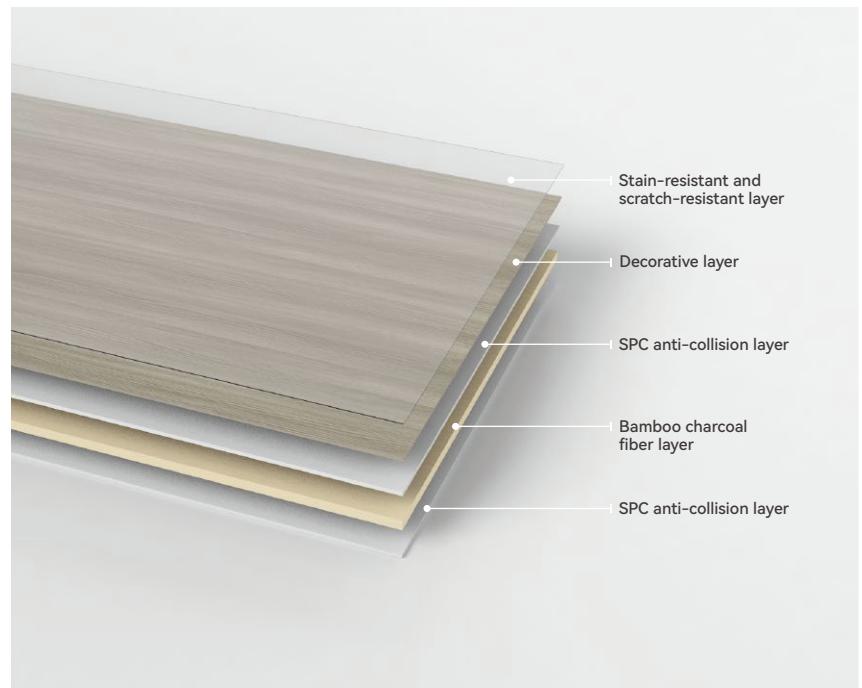

PRODUCT INFORMATION

Size(mm)	Thickness
Width: 1100 Length: 2440/2600/2800/3000/ Customized length under 6 meters	5/8mm
Material \ cross-section	EP level
SPC anti-collision layer+bamboo charcoal fiber	ENF
Advantage	Fire rating
Impact Resistance / Deformation Resistance / Bendable	B1
Splicing method	Process
Tight splicing/Metal profile connection/Process seam	PVC covered / PETG flat sticker

PRODUCT PERFORMANCE REAL SHOT



Waterproof test



Bend forward



Bend backwards



CASE APPRECIATION

Super impact resistance, more impact resistance


ANTI-COLLISION WALL PANEL

OPTIONAL COLOR

Wood grain series



Solid color series



Metal series



Cloth pattern series




Stone series



04

WPC WALL PANEL

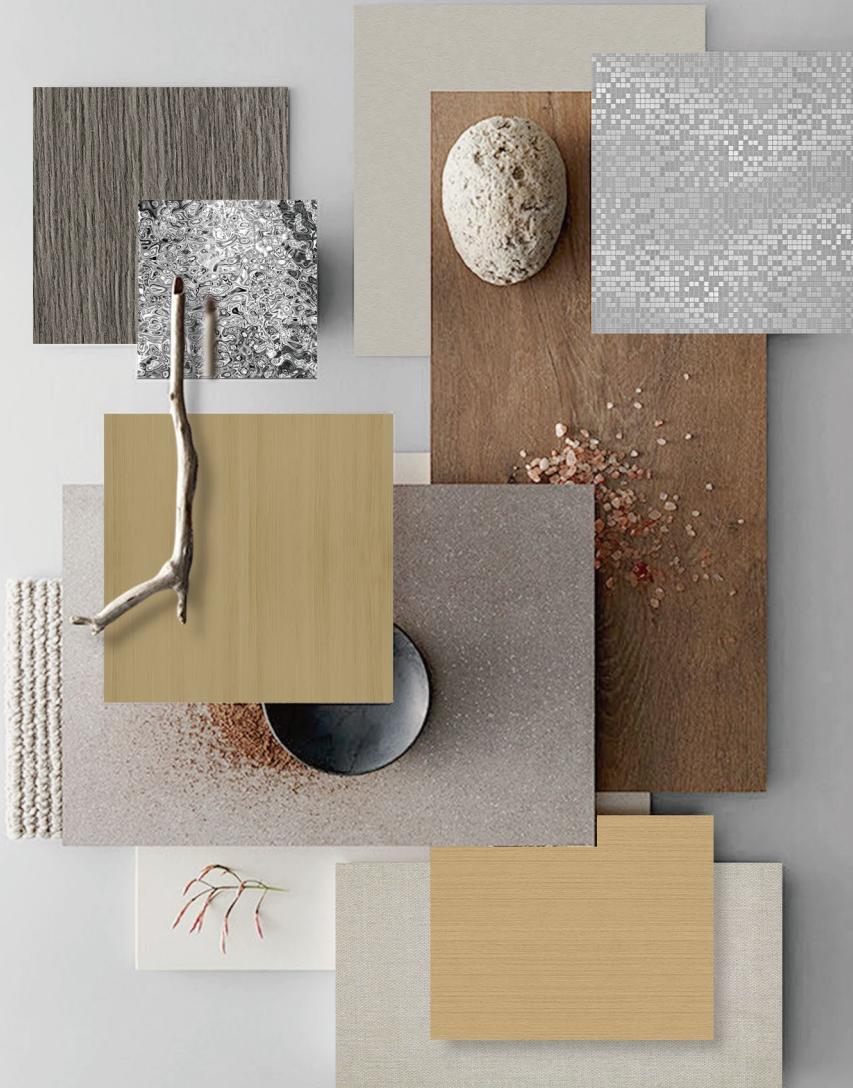

EP LEVEL



FIRE RATING




WATERPROOF



BENDABLE

PRODUCT STRUCTURE DIAGRAM

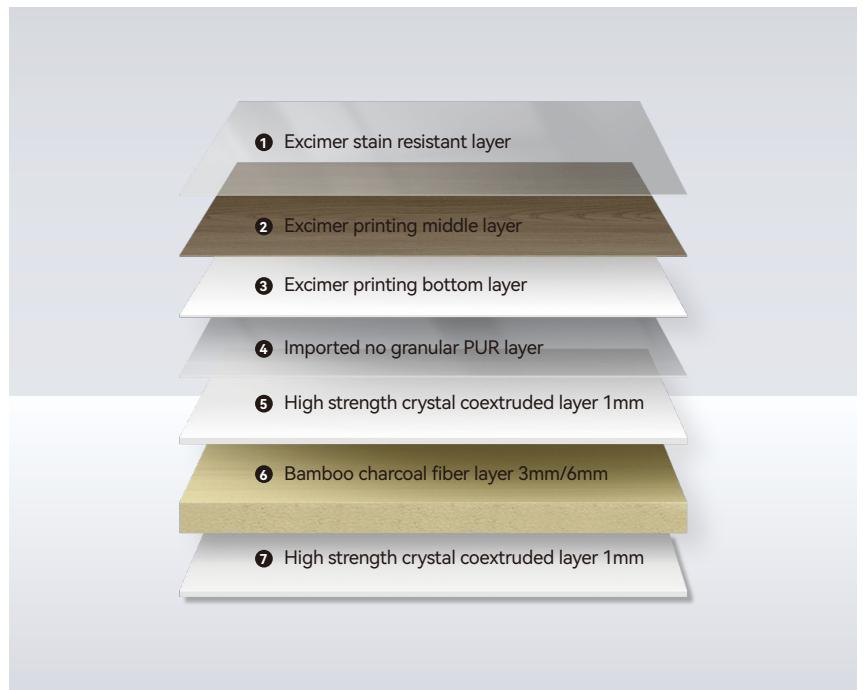


PRODUCT INFORMATION

Size(mm)	Thickness
Width: 1100 Length: 2440/2600/2800/3000/ Customized length under 6 meters	5/8mm
Material \ cross-section	EP level
Crystal like co extruded layer+Bamboo charcoal fiber	ENF
Advantage	Fire rating
Eco-friendly/Flame retardant/Waterproof/Bendable	B1
Splicing method	Process
Tight splicing/Metal profile connection/Process seam	PUR coating/ PUR flat sticker

PRODUCT PERFORMANCE REAL SHOT



Waterproof test



Bend forward



Bend backwards



CASE APPRECIATION

The technology of the new era
and the ceiling in the ruthless decoration panel


WPC WALL PANEL

OPTIONAL COLOR

Wood grain series



Solid color series



Metal series



Cloth pattern series



Stone series



05

WPC SPLICING WALL PANEL



EP LEVEL



FIRE RATING




WATERPROOF



BENDABLE

PRODUCT STRUCTURE DIAGRAM

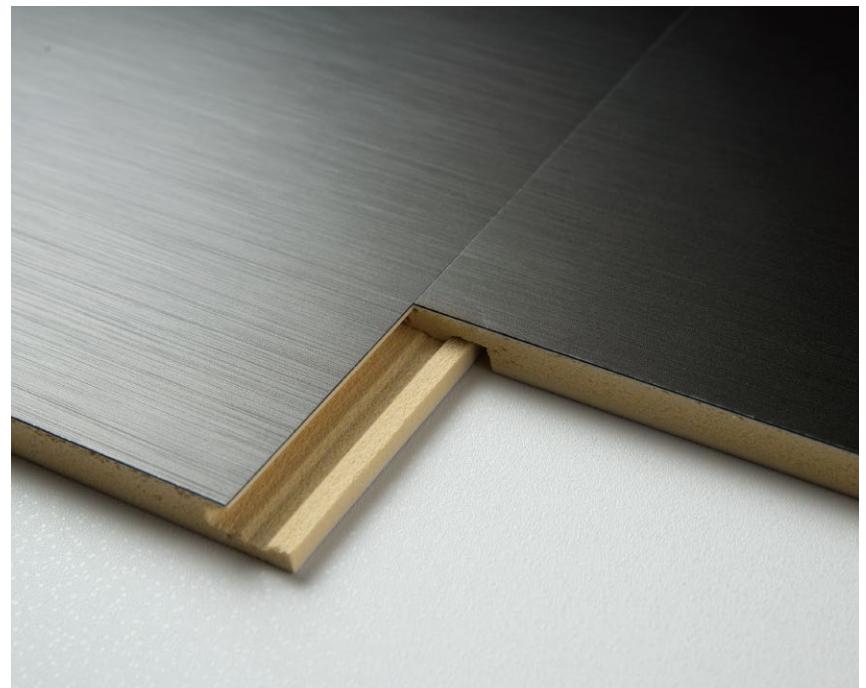

PRODUCT INFORMATION

Size(mm)	EP level
Width: 600/800/1100 Length: 1200/2800/Customized length under 3600 Thickness: 8	ENF
Material \ cross-section	Fire rating
Crystal like coextruded layer + Bamboo charcoal fiber	B1
Advantage	Splicing method
Eco-friendly/Flame retardant/Waterproof / Bendable	Process seam

PRODUCT PERFORMANCE REAL SHOT



WPC p-seam
splicing wall panel



WPC u-seam
splicing wall panel



WPC tight-seam
splicing wall panel



CASE APPRECIATION

Craftsmanship and convenient installation on walls


WPC SPLICING WALL PANEL

OPTIONAL COLOR


Wood grain series



Solid color series

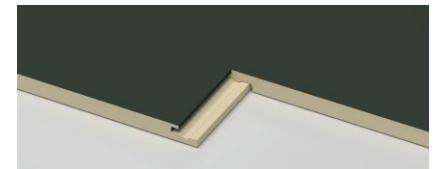

Cloth pattern series

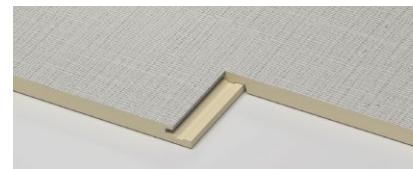

Stone series



06

CARBON CRYSTAL WALL PANEL



EP LEVEL



FIRE RATING




WATERPROOF



BENDABLE

PRODUCT STRUCTURE DIAGRAM

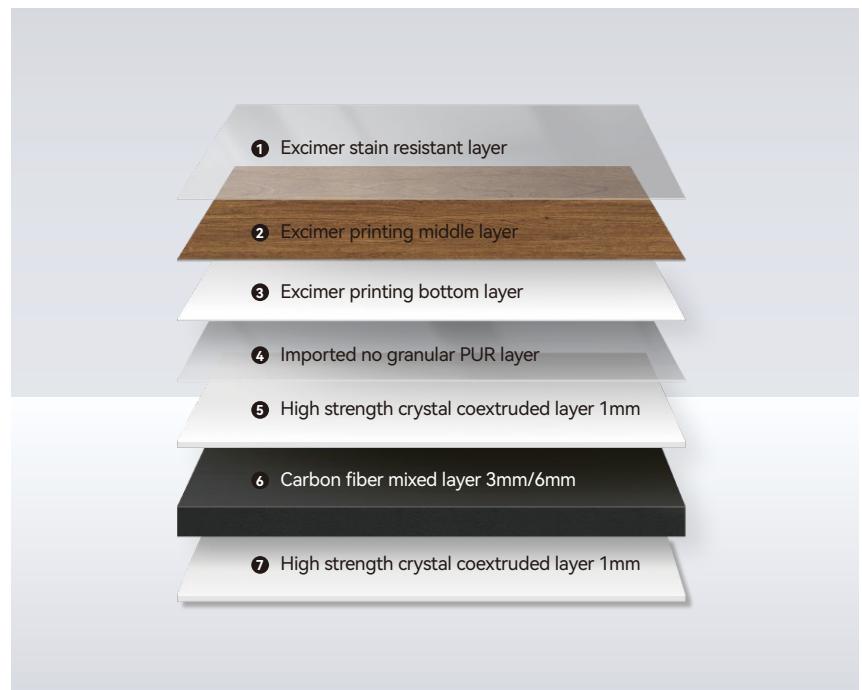

PRODUCT INFORMATION

Size(mm)	Thickness
Width: 1100 Length: 2440/2600/2800/3000/ Customized length under 6 meters	5/8mm
Material \ cross-section	EP level
Crystal like co extruded layer+Carbon fiber	E0
Advantage	Fire rating
Eco-friendly/Flame retardant/Waterproof/Bendable	B1
Splicing method	Process
Tight splicing/Metal profile connection/Process seam	PUR coating/ PUR flat sticker

PRODUCT PERFORMANCE REAL SHOT



Waterproof test



Bend forward



Bend backwards



CASE APPRECIATION

Highly decorative
freely curved for styling

CARBON CRYSTAL WALL PANEL

OPTIONAL COLOR

Wood grain series




Solid color series



Metal series



Cloth pattern series




Stone series



07

FIREPROOF WALL PANEL

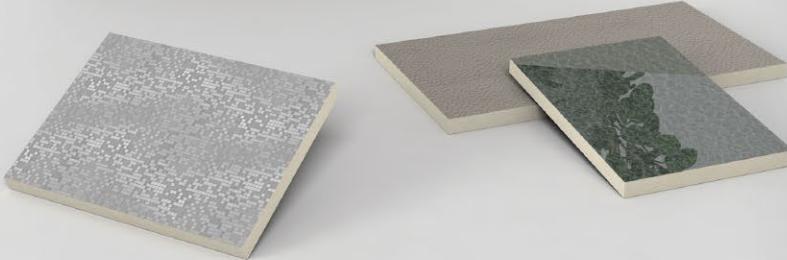

EP LEVEL



FIRE RATING




WATERPROOF



DISTORTION PROTECTION

PRODUCT STRUCTURE DIAGRAM

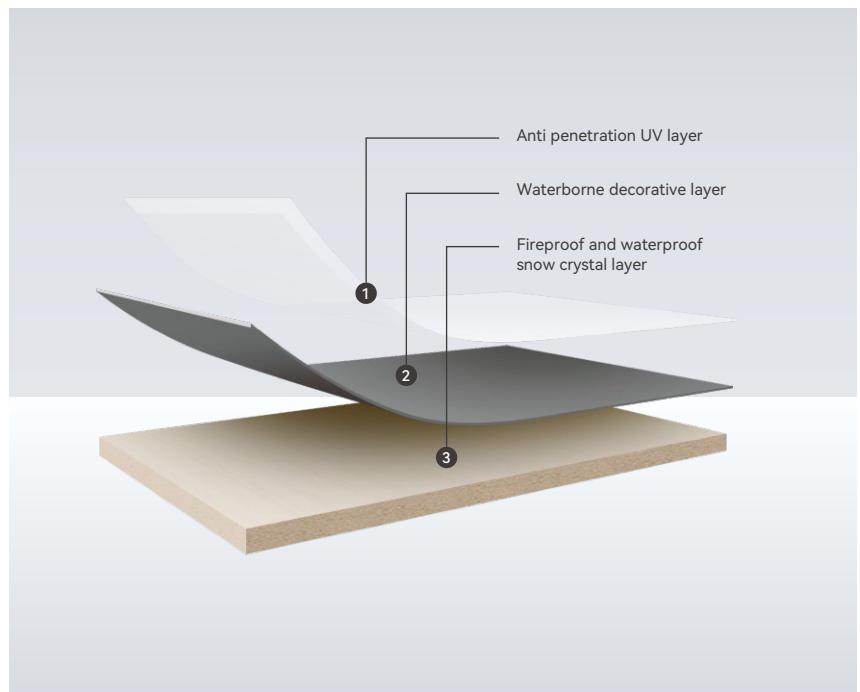

PRODUCT INFORMATION

Size(mm)	EP level
Width: 1220 Length: 2440 Thickness: 5mm	E0
Material \ cross-section	Fire rating
Fireproof Wall Panel	A1
Advantage	Radioactivity
Environmental protection/Flame retardant/waterproof/ant proof/100% asbestos free	<1.0 IRa <1.0 lr
Wet Expansion Rate	Heat conduction
≤0.25%	≤0.2 W/(m·k)

PRODUCT PERFORMANCE REAL SHOT



Fire test



Front of product



Product back



CASE APPRECIATION

Fire and flame retardant
self-extinguishing when removed from fire


FIREPROOF WALL PANEL

OPTIONAL COLOR

Wood grain series



Solid color series

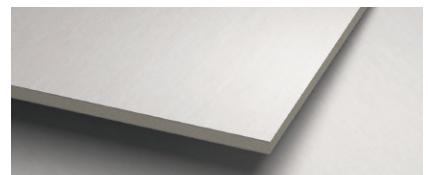

Cloth pattern series



Stone series



FLUTED WALL PANEL



EP LEVEL



FIRE RATING



WATERPROOF



BENDABLE

PRODUCT INFORMATION

Picture	Name	Cross-section	Size(mm)	Ep rating	Fire rating
	170 bamboo and wood grating		Width:170 Length:3000 Thickness:23.5	E0	B1
	170 edge strips		Width:41.6 Length:3000 Thickness:23.5	E0	B1
	157 inner arc grille		Width:157 Length:3000 Thickness:18.5	E0	B1
	157 edge strips		Width:30.5 Length:3000 Thickness:18.5	E0	B1
	150 arc grid		Width:150 Length:3000 Thickness:15	E0	B1
	150 edge strips		Width:28 Length:3000 Thickness:15	E0	B1
	110*18 solid grid		Width:110 Length:3000 Thickness:18	E0	B1
	110*18 edge strips		Width:25.7 Length:3000 Thickness:18	E0	B1
	150 bamboo and wood grating		Width:150 Length:3000 Thickness:8.8	E0	B1
	160 triangular grille		Width:160 Length:3000 Thickness:18	E0	B1
	153*24 solid grid		Width:153 Length:3000 Thickness:24	E0	B1
	120*9 solid grid		Width:120 Length:3000 Thickness:9	E0	B1
	70 Corrugated grating		Width:70 Length:3000/3600 Thickness:15	E0	B1
	40 Corrugated grating		Width:40 Length:3000/3600 Thickness:15	E0	B1

OPTIONAL COLOR

Wood grain series



Solid color series



Metal series



Cloth pattern series



Stone series





CASE APPRECIATION

PRODUCT REAL SHOT



110*18 solid grid



Stitching effect real shot



Edge effect real shot



CASE APPRECIATION

PRODUCT REAL SHOT



120*9 solid grid



Stitching effect real shot



Stitching effect real shot



CASE APPRECIATION


PRODUCT REAL SHOT



70 Corrugated grating

Stitching effect real shot

Stitching effect real shot

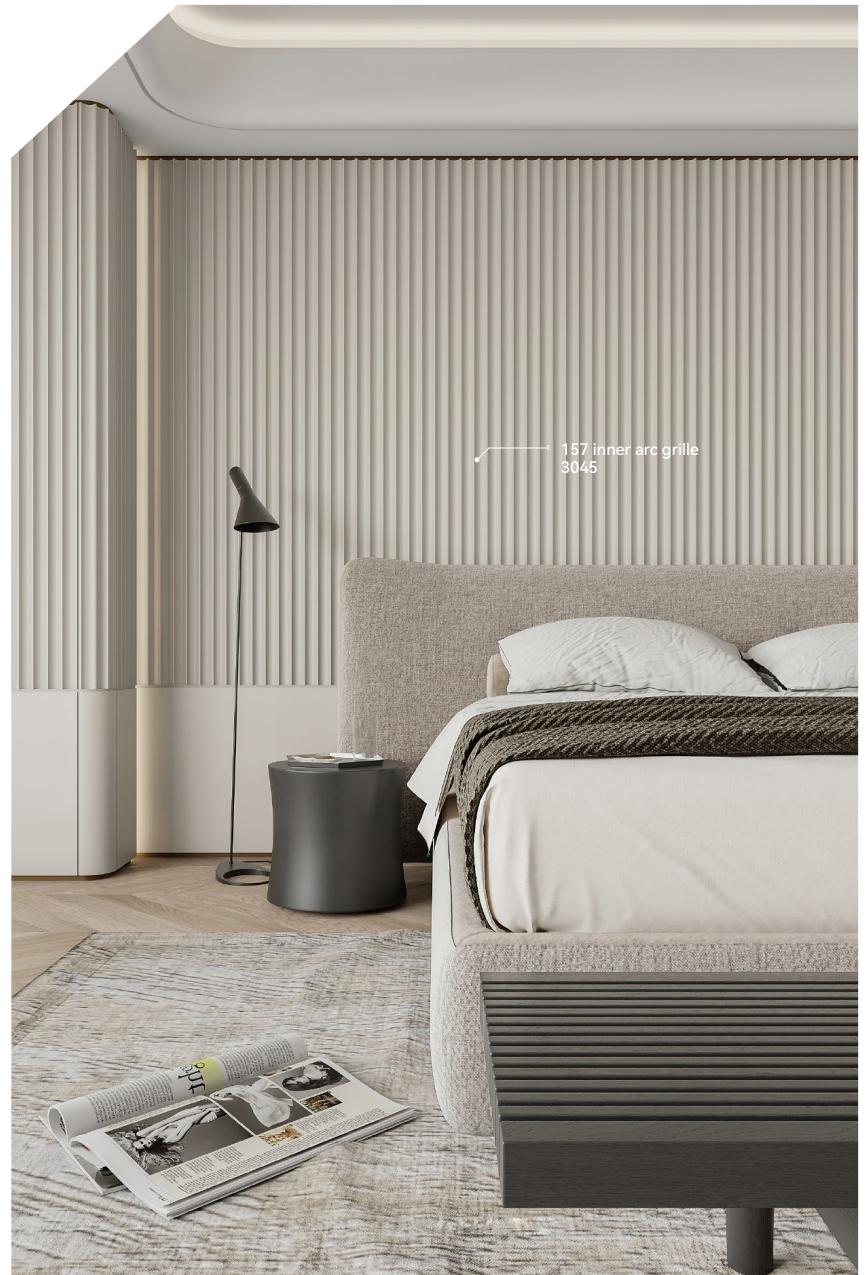

CASE APPRECIATION

PRODUCT REAL SHOT



157 inner arc grille

Stitching effect real shot

Bending effect real shot

MS FLAT DOOR

09



EP LEVEL



FIRE RATING




WATERPROOF




BENDABLE



MATERIAL STRUCTURE (FLAT DOOR)

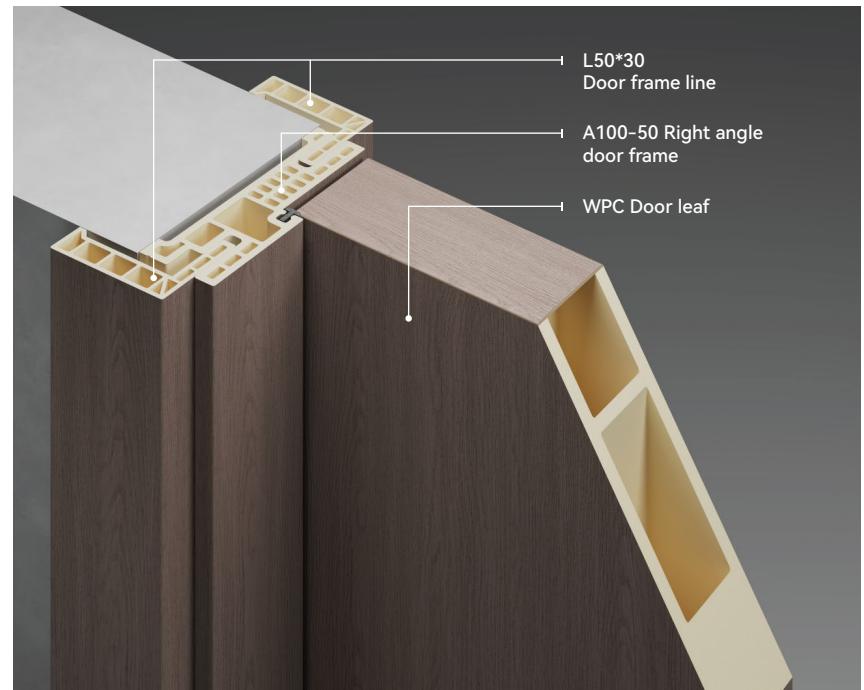

PRODUCT SECTION

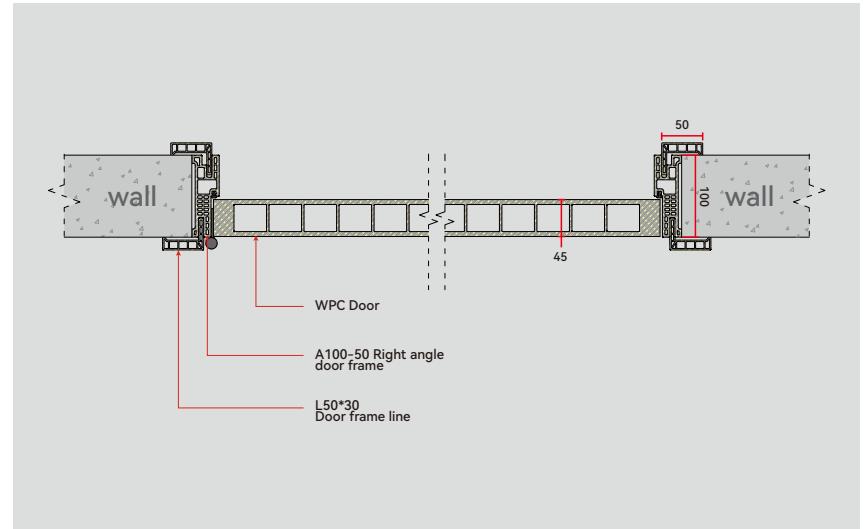

PRODUCT INFORMATION

Standard Doorway height and thickness (right angle door set)	Standard Doorway height and thickness (curved door set)	Doorway range (mm)
Doorway height: 2143mm Doorway width: 804mm Wall thickness: 100mm	Doorway height: 2140mm Doorway width: 798mm Wall thickness: 100mm	Maximum Doorway height ≤3040 Maximum Doorway width ≤1150 Wall thickness: ≥100
Door leaf (mm)	Ep rating	Ep rating
Thickness: 45	E0	B1


MATERIAL STRUCTURE (FLAT GLASS DOOR)



OPTIONAL DOOR TYPE



PRODUCT SECTION

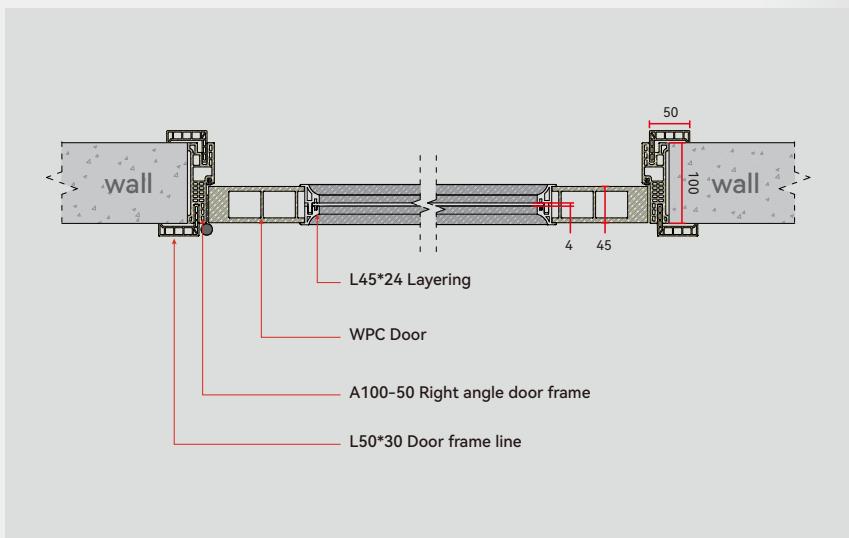

MS-09

MS-09B

PRODUCT INFORMATION

Standard Doorway height and thickness (right angle door set)	Standard Doorway height and thickness (curved door set)	Doorway range (mm)
Doorway height: 2143mm Doorway width: 804mm Wall thickness: 100mm	Doorway height: 2140mm Doorway width: 798mm Wall thickness: 100mm	Maximum Doorway height ≤3040 Maximum Doorway width ≤1150 Wall thickness: ≥100
Door leaf (mm)	Ep rating	Ep rating
Thickness: 45	E0	B1

OPTIONAL DOOR TYPE



MS-01



MS-03



MS-04

OPTIONAL DOOR TYPE



MS-15



MS-16



MS-17



MS-08



MS-09



MS-11



MS-18



MS-19



MS-20



MS-12



MS-13



MS-14



MS-21



MS-B5



MS-A4

M16 ALUMINUM FRAMED DOOR


10



MATERIAL STRUCTURE



PRODUCT SECTION

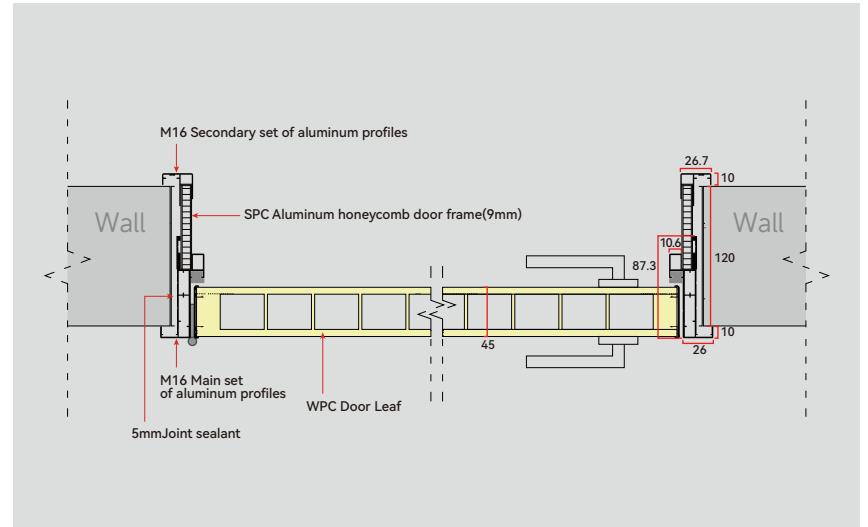

PRODUCT INFORMATION

Size (mm)	Door leaf (mm)	Material
Maximum Doorway width ≤1100 Maximum Doorway height ≤2800	Thickness: 45	Aluminium+ SPC Aluminum honeycomb panel
Ep rating	Technology	Advantage
E1	Door leaf PUR edge+ Aluminium Door frame line	Eco-friendly/ Moisture-proof

OPTIONAL DOOR TYPE



M16-01



M16-03



M16-04

OPTIONAL DOOR TYPE



M16-15



M16-16



M16-17



M16-08



M16-09



M16-11



M16-18



M16-19



M16-20



M16-12



M16-13



M16-14



M16-21



PLIABLE



WATERPROOF

LIGHTWEIGHT
INORGANIC

PRODUCT INFORMATION


Picture	Name	Colour	Size(mm)	Advantage
	Dolomite	Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black 	Width: 600 Length: 1200 Thickness: 3.5	Pliable/ Waterproof/ Lightweight Inorganic
	Qian mo stone	Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black 	Width: 600 Length: 1200 Thickness: 4-8	Pliable/ Waterproof/ Lightweight Inorganic
	Flowing stone	Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black 	Width: 600 Length: 1200 Thickness: 4-7	Pliable/ Waterproof/ Lightweight Inorganic
	Moonstone	Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black 	Width: 600 Length: 1200 Thickness: 3-8	Pliable/ Waterproof/ Lightweight Inorganic
	Fu Kai stone	Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black 	Width: 600 Length: 1200 Thickness: 3-8	Pliable/ Waterproof/ Lightweight Inorganic
	Rammed earth board	Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black 	Width: 600 Length: 1200 Thickness: 4-6	Pliable/ Waterproof/ Lightweight Inorganic
	Herringbone style	Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black 	Width: 600 Length: 1200 Thickness: 4-5	Pliable/ Waterproof/ Lightweight Inorganic
	Cloth pattern stone	Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black 	Width: 600 Length: 1200 Thickness: 3-7	Pliable/ Waterproof/ Lightweight Inorganic
	Choroid stone	Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black 	Width: 600 Length: 1200 Thickness: 2-7	Pliable/ Waterproof/ Lightweight Inorganic
	Dacite stone	Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black 	Width: 1150 Length: 3300 Thickness: 3-8	Pliable/ Waterproof/ Lightweight Inorganic



RAMMED EARTH BOARD >

Size(mm)	Thickness
Width: 600mm Length: 1200mm	4-6mm
Colour	Advantage
Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black ● ● ● ● ● ● ● ● ● ●	Pliable / Waterproof / Lightweight inorganic

PRODUCT ADVANTAGES

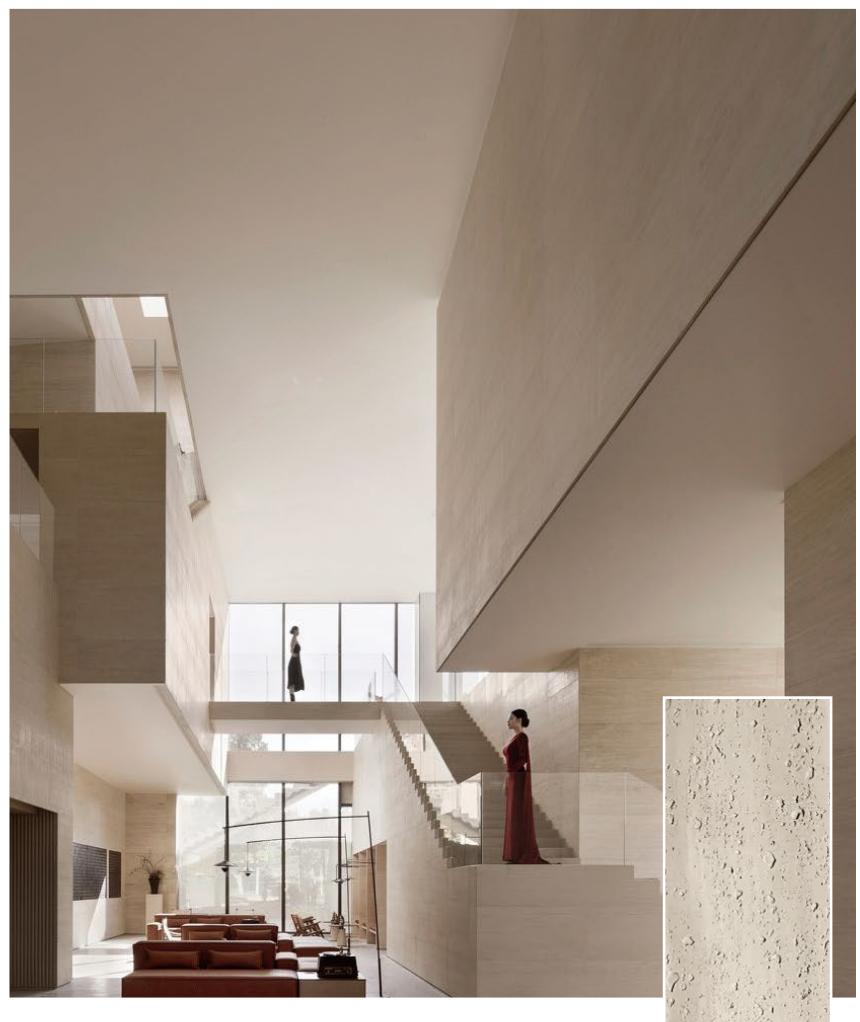


DOLOMITE >

Size(mm)	Thickness
Width: 600mm Length: 1200mm	3.5mm
Colour	Advantage
Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black ● ● ● ● ● ● ● ● ● ●	Pliable / Waterproof / Lightweight inorganic

PRODUCT ADVANTAGES



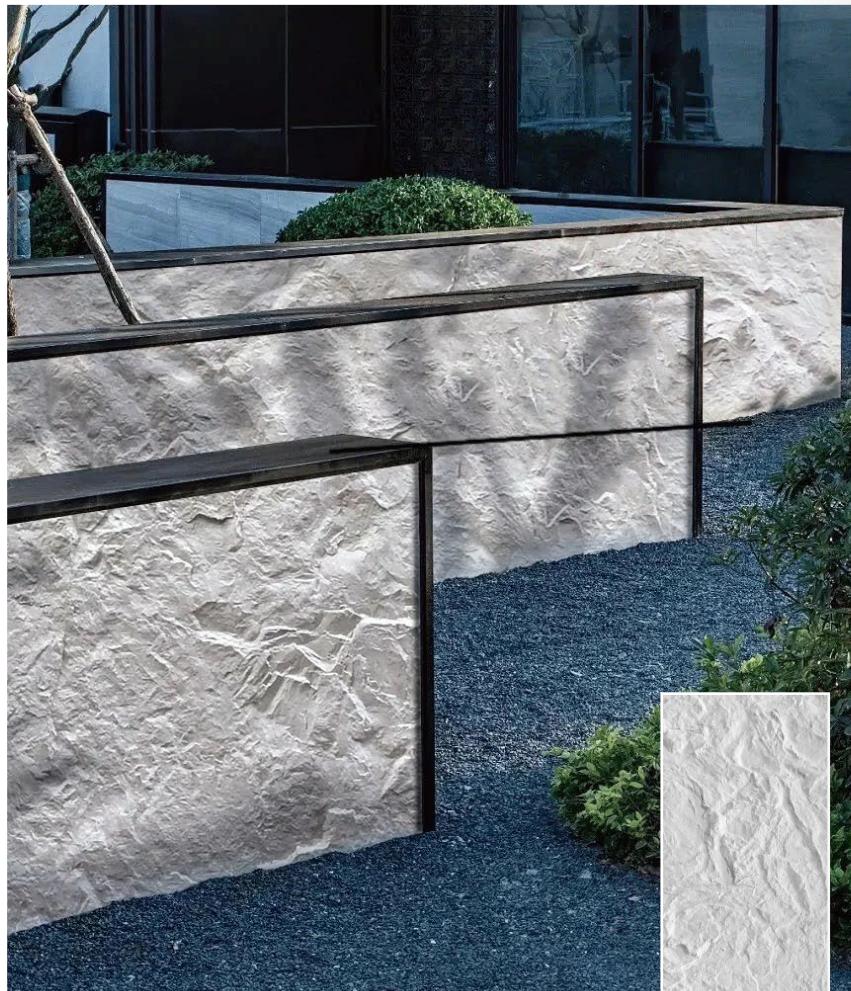

FU KAI STONE >

Size(mm)	Thickness
Width: 600mm Length: 1200mm	3-8mm
Colour	Advantage
Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black ● ● ● ● ● ● ● ● ● ● ● ●	Pliable / Waterproof / Lightweight inorganic

PRODUCT ADVANTAGES




QIAN MO STONE >

Size(mm)	Thickness
Width: 600mm Length: 1200mm	4-8mm
Colour	Advantage
Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black ● ● ● ● ● ● ● ● ● ● ● ●	Pliable / Waterproof / Lightweight inorganic

PRODUCT ADVANTAGES




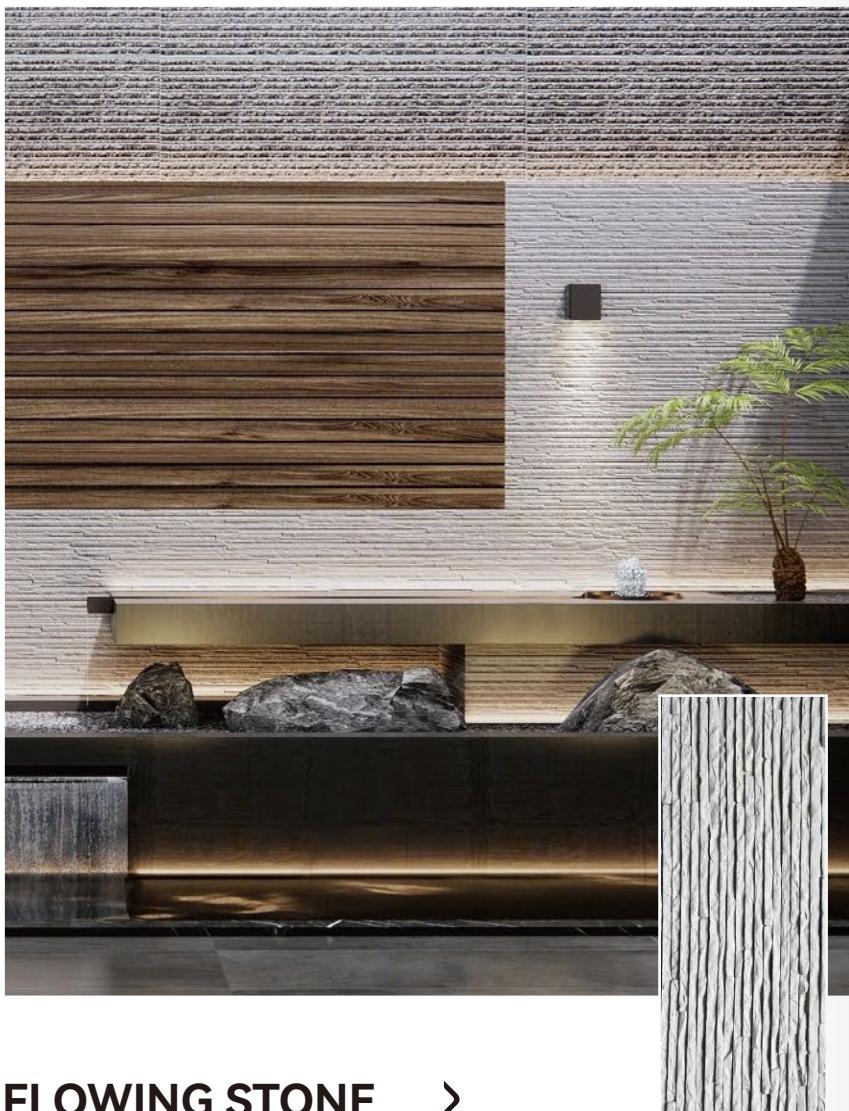

FLOWING STONE >

Size(mm)	Thickness
Width: 600mm Length: 1200mm	4-7mm
Colour	Advantage
Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black ● ● ● ● ● ● ● ● ● ● ● ●	Pliable / Waterproof / Lightweight inorganic

PRODUCT ADVANTAGES

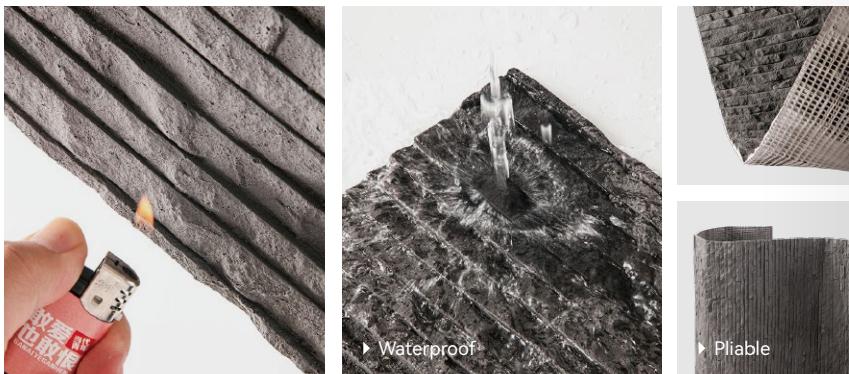

MOONSTONE >

Size(mm)	Thickness
Width: 600mm Length: 1200mm	3-8mm
Colour	Advantage
Cement Gray / Southern Red / Xituo / Northern Brown / Plateau Yellow / Oriental coffee / Snowflake White / Han White/ Black ● ● ● ● ● ● ● ● ● ● ● ●	Pliable / Waterproof / Lightweight inorganic

PRODUCT ADVANTAGES

