
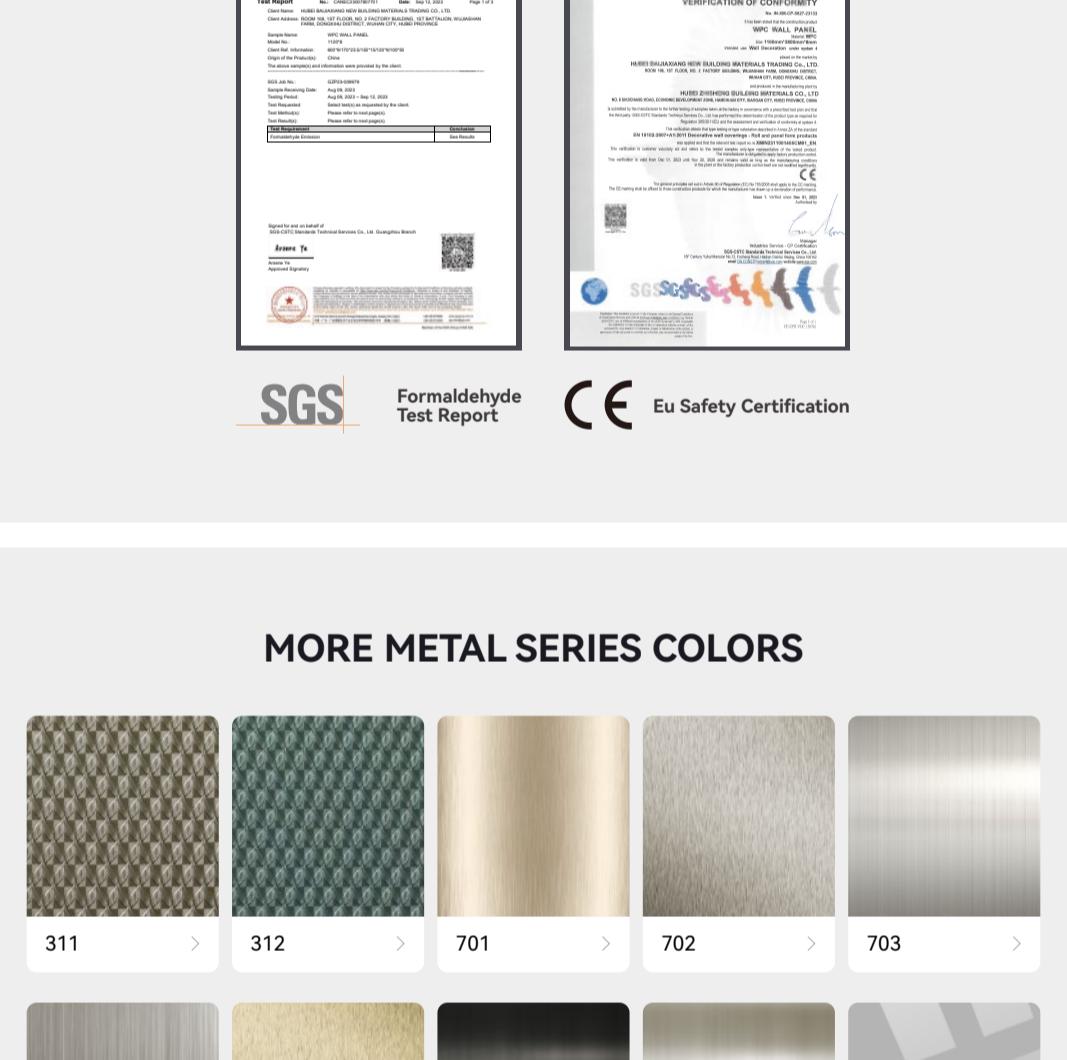
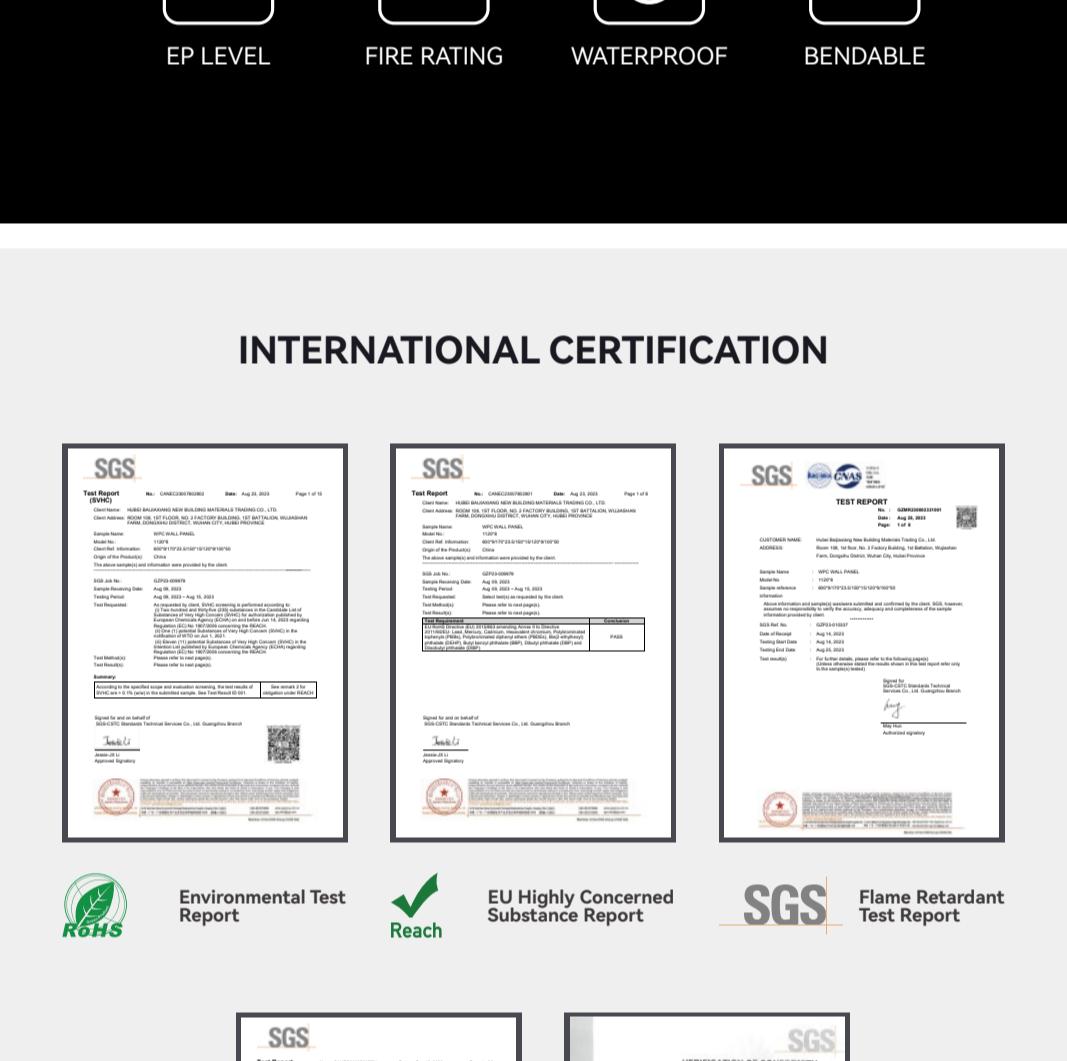
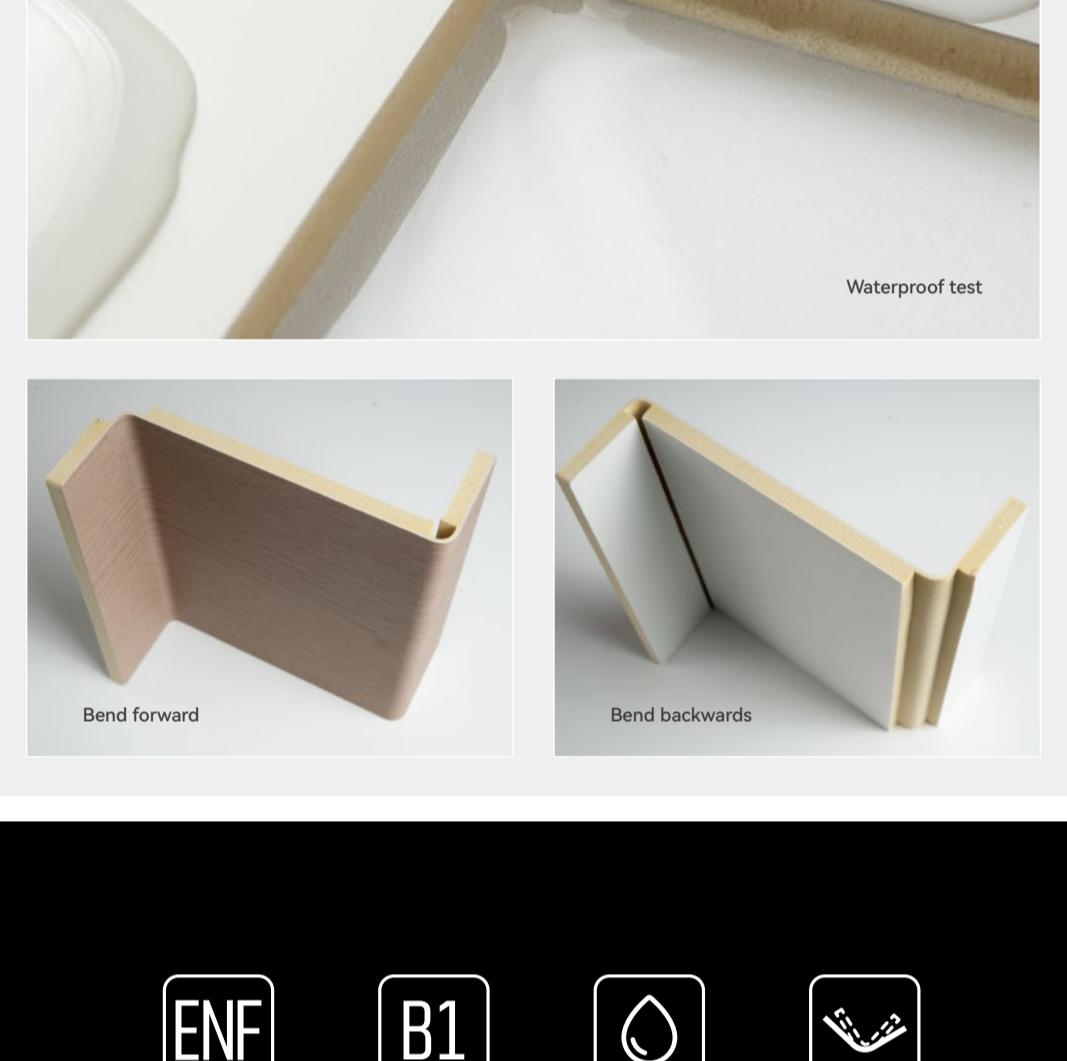
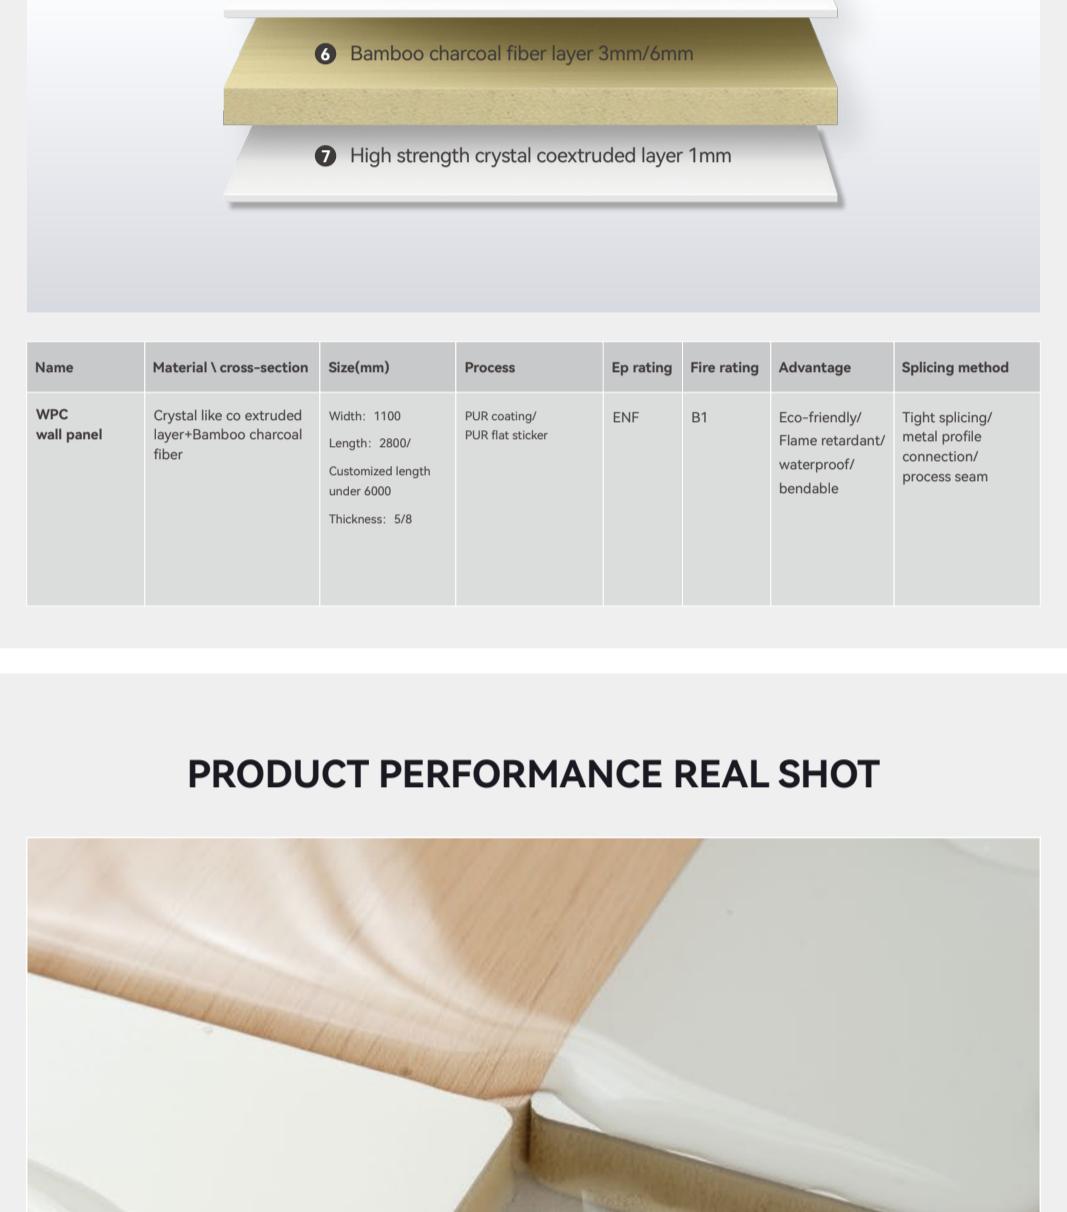


5018

PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

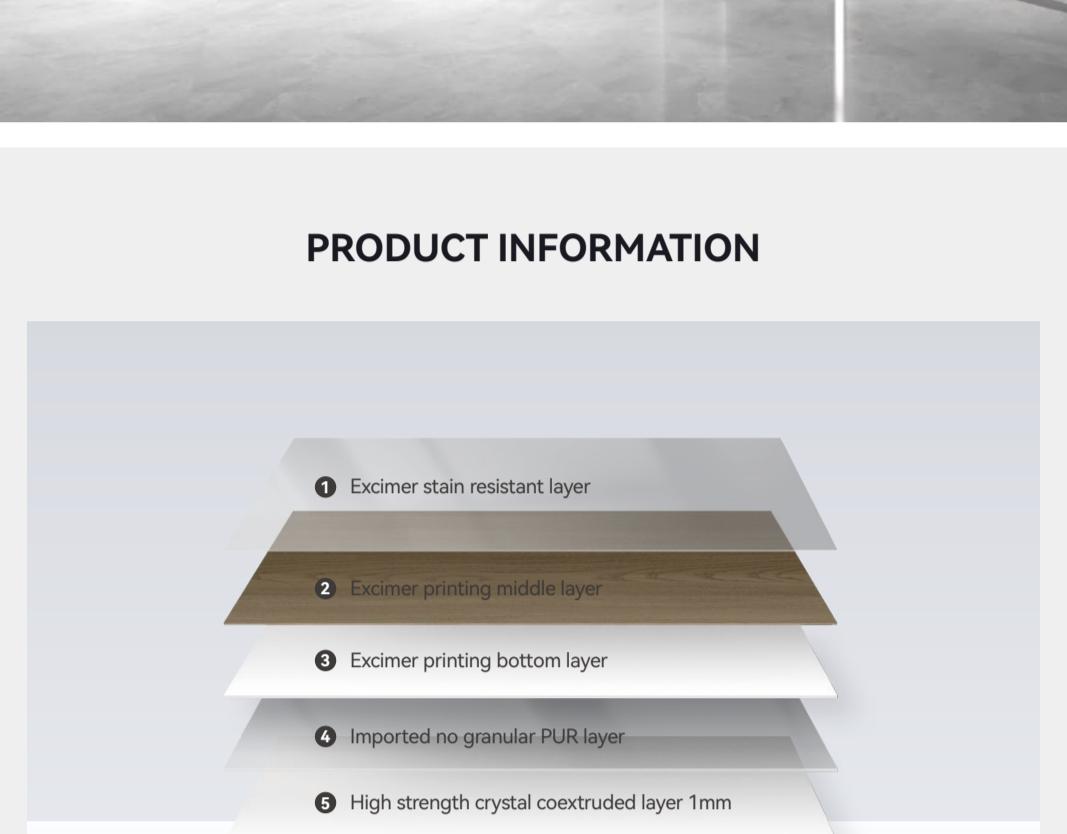

PRODUCT INFORMATION

① Excimer stain resistant layer

② Excimer printing middle layer

③ Excimer printing bottom layer

④ Imported no granular PUR layer



⑤ High strength crystal coextruded layer 1mm

⑥ Bamboo charcoal fiber layer 3mm/6mm

⑦ High strength crystal coextruded layer 1mm


Name	Material \ cross-section	Size(mm)	Process	EP rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

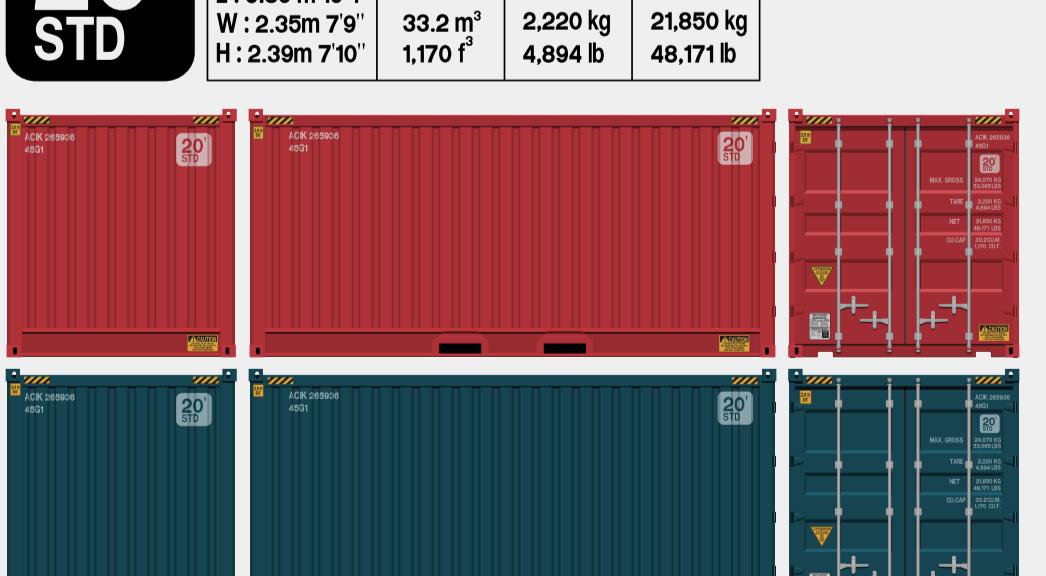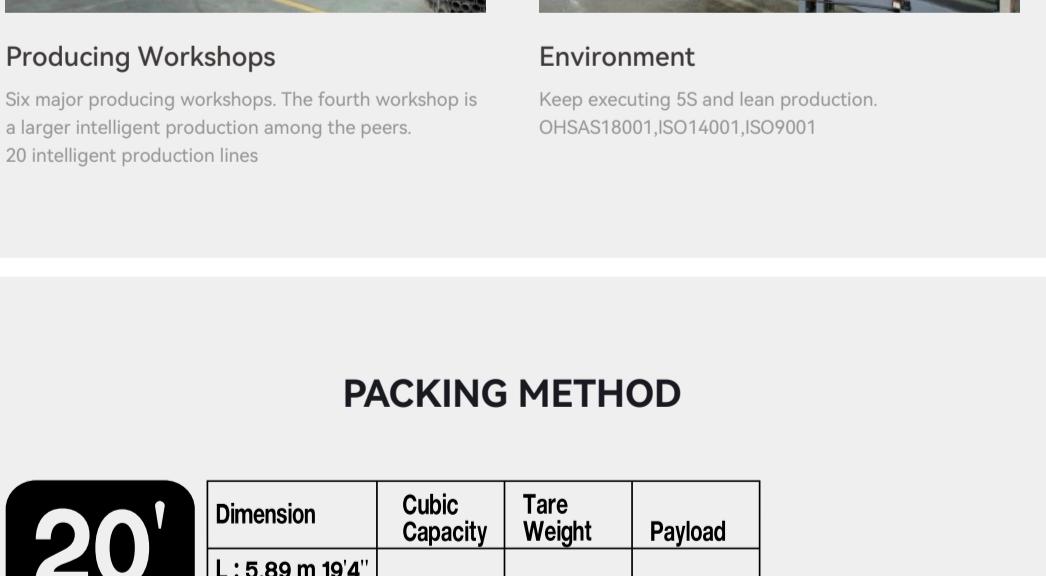

20' STD

Dimension	Cubic Capacity	Tare Weight	Payload
L: 5.89 m 19'4" W: 2.35m 7'9" H: 2.39m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,711 lb

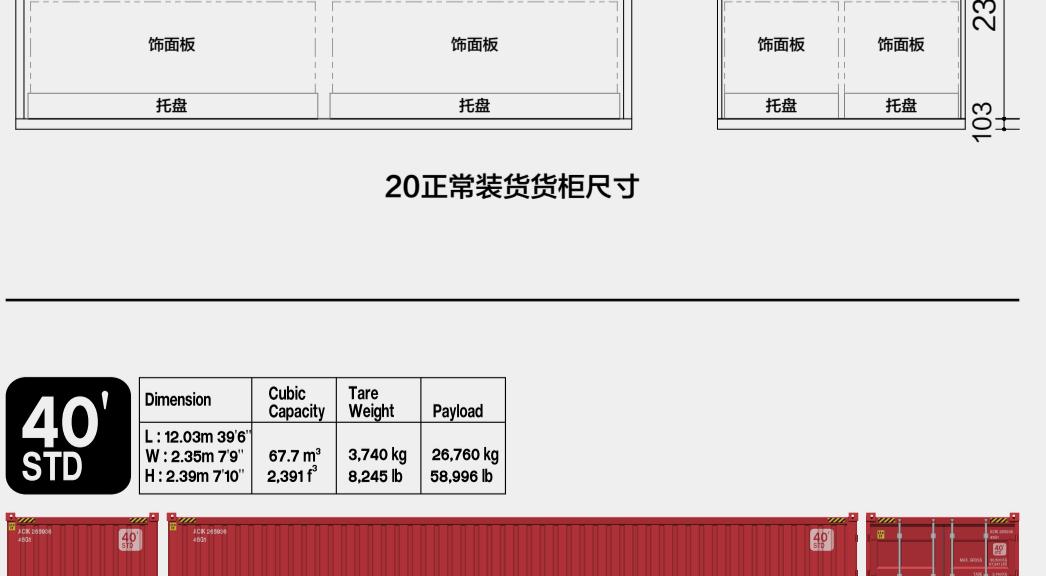

20正常装货柜尺寸

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m ³ 2,391 f ³	3,740 kg 8,245 lb	26,760 kg 59,565 lb

40正常装货柜尺寸