



- SOLID COLOR -

**3033**  
COLOR NUMBER

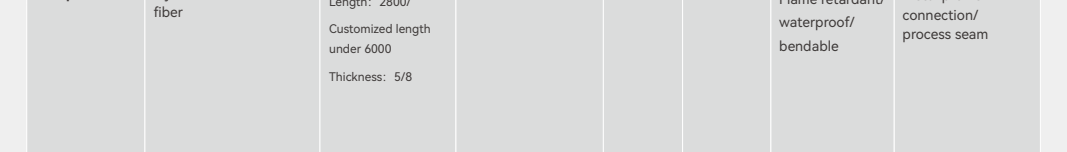


## PRODUCT INFORMATION

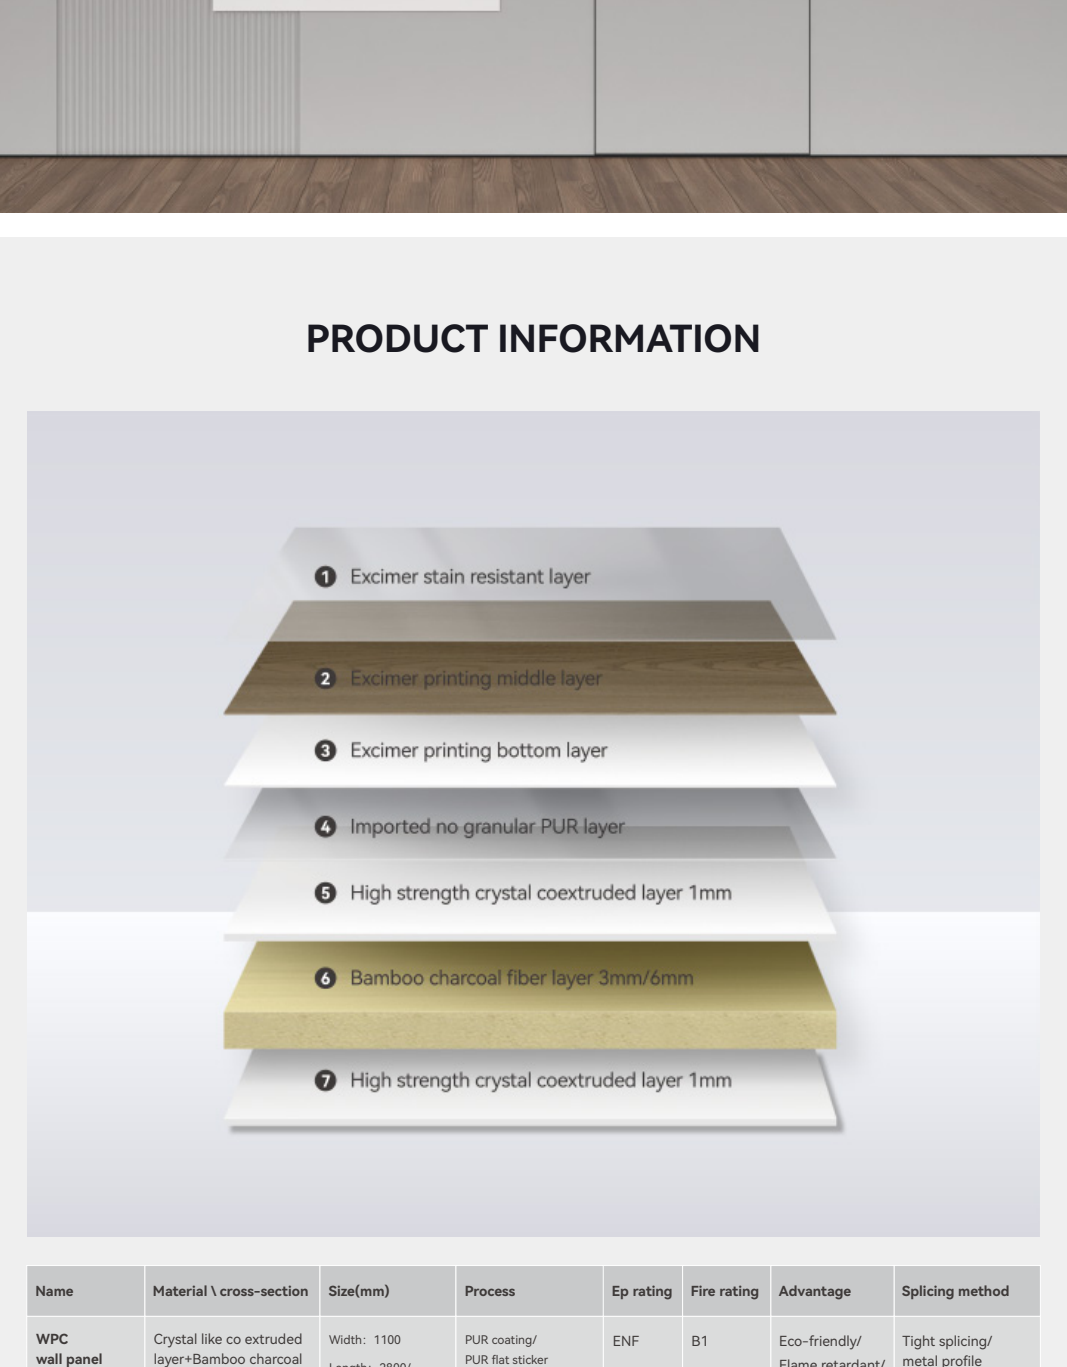


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam


## PRODUCT PERFORMANCE REAL SHOT

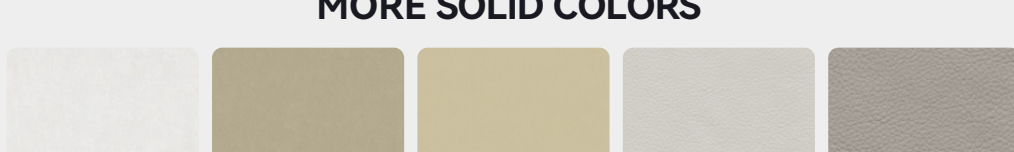

Waterproof test

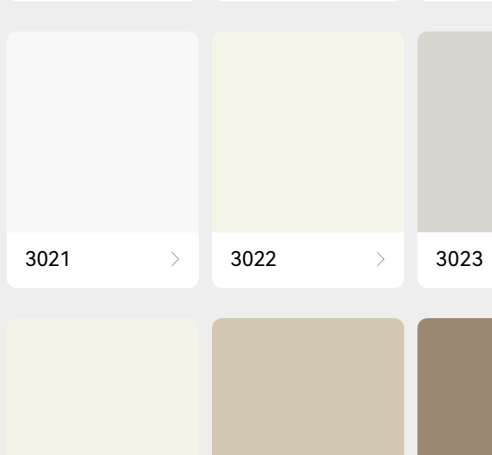

Bend forward

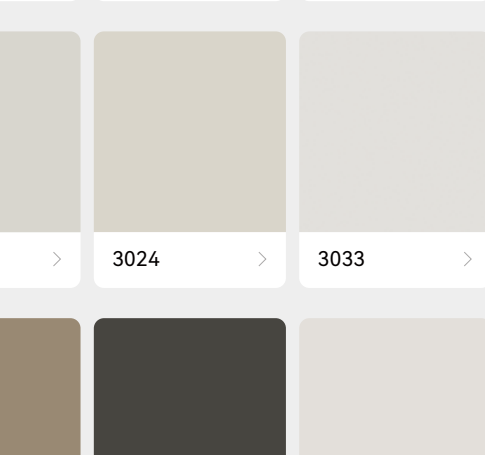

Bend backwards



EP LEVEL



FIRE RATING















WATERPROOF



BENDABLE

## MORE SOLID COLORS

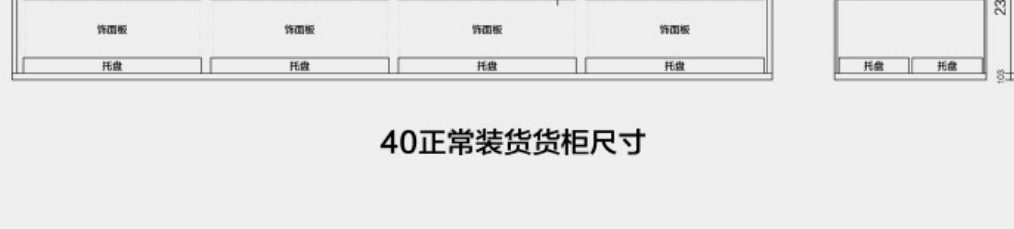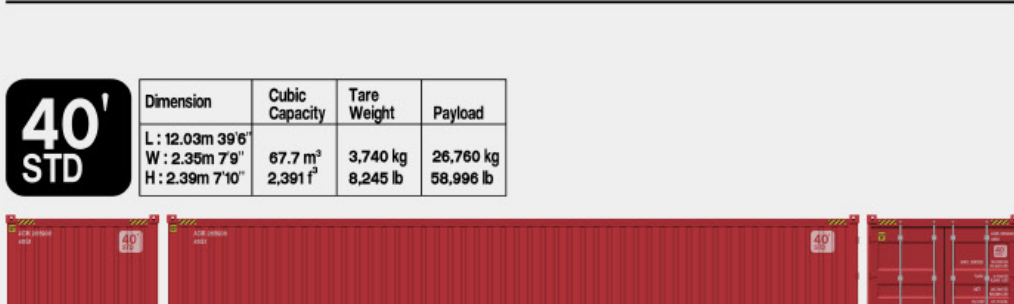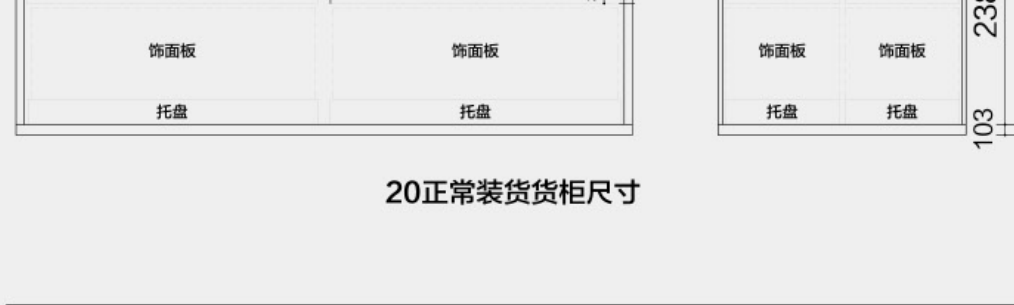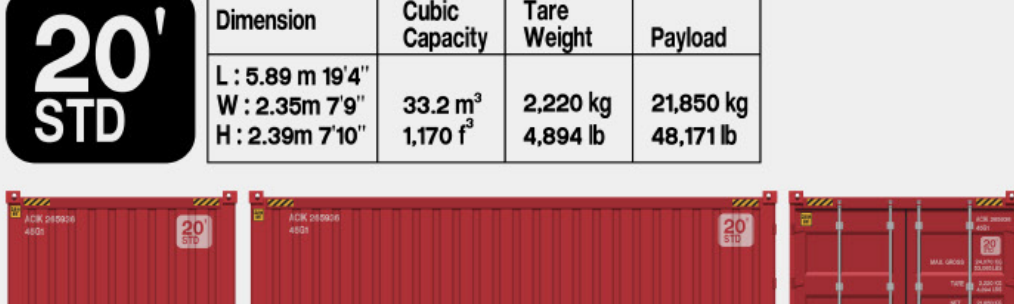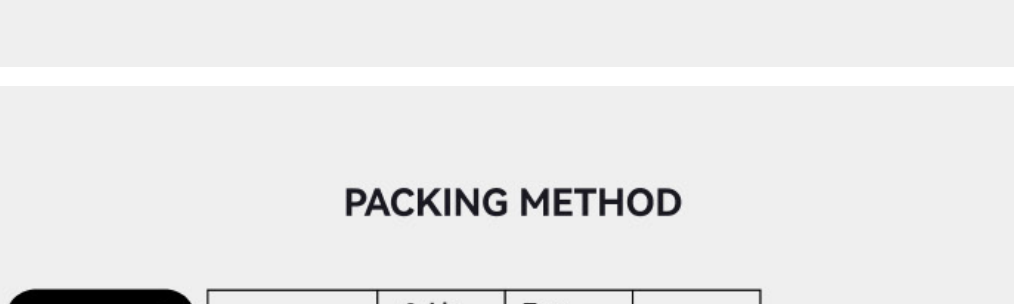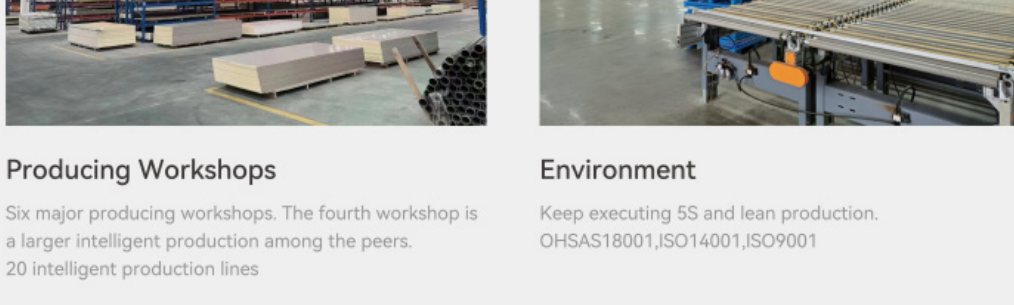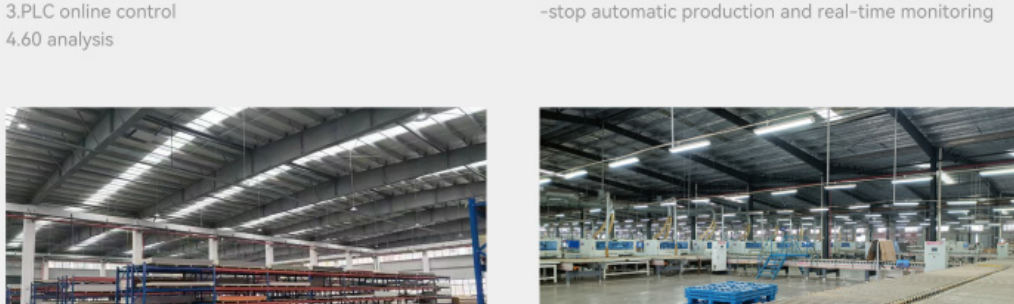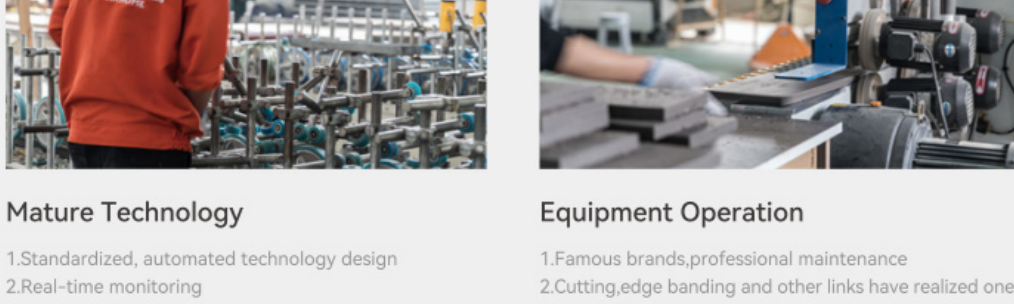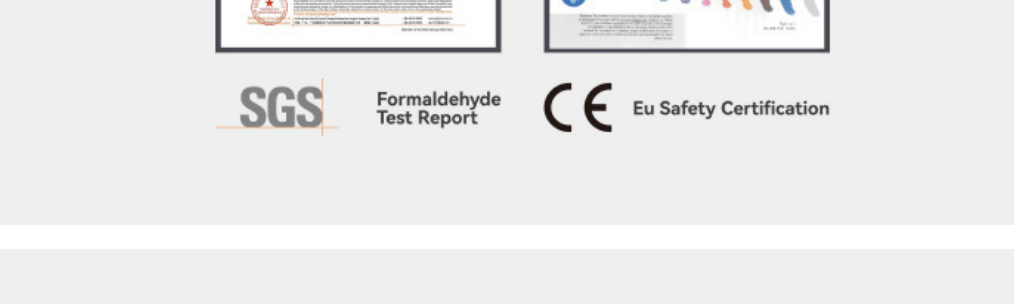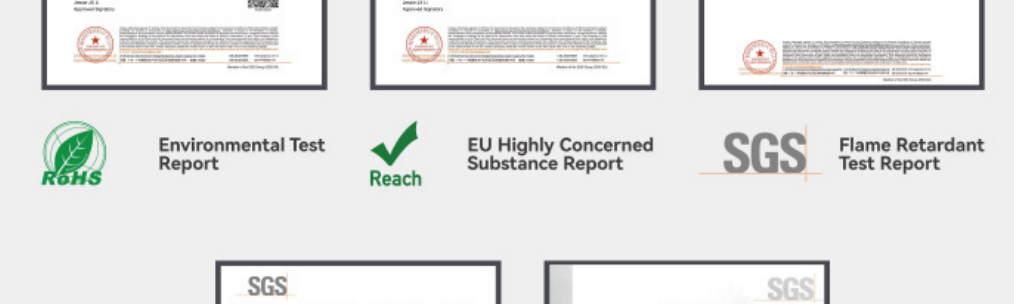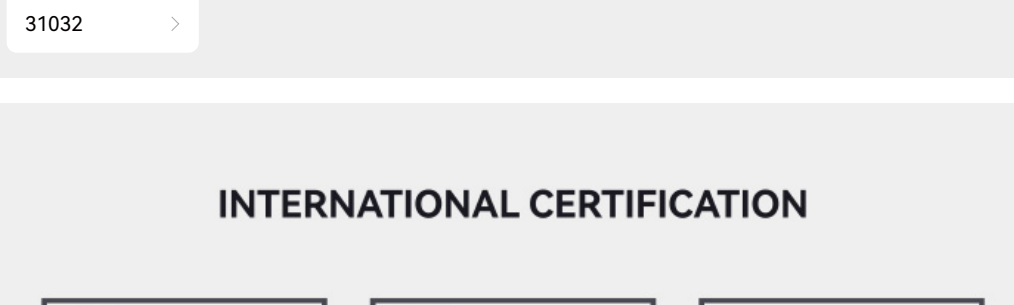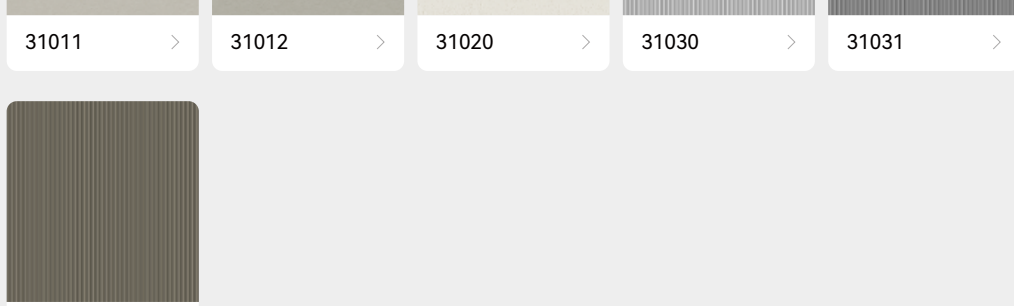

## INTERNATIONAL CERTIFICATION



## FACTORY STRENGTH



## PACKING METHOD

