



PRODUCT INFORMATION

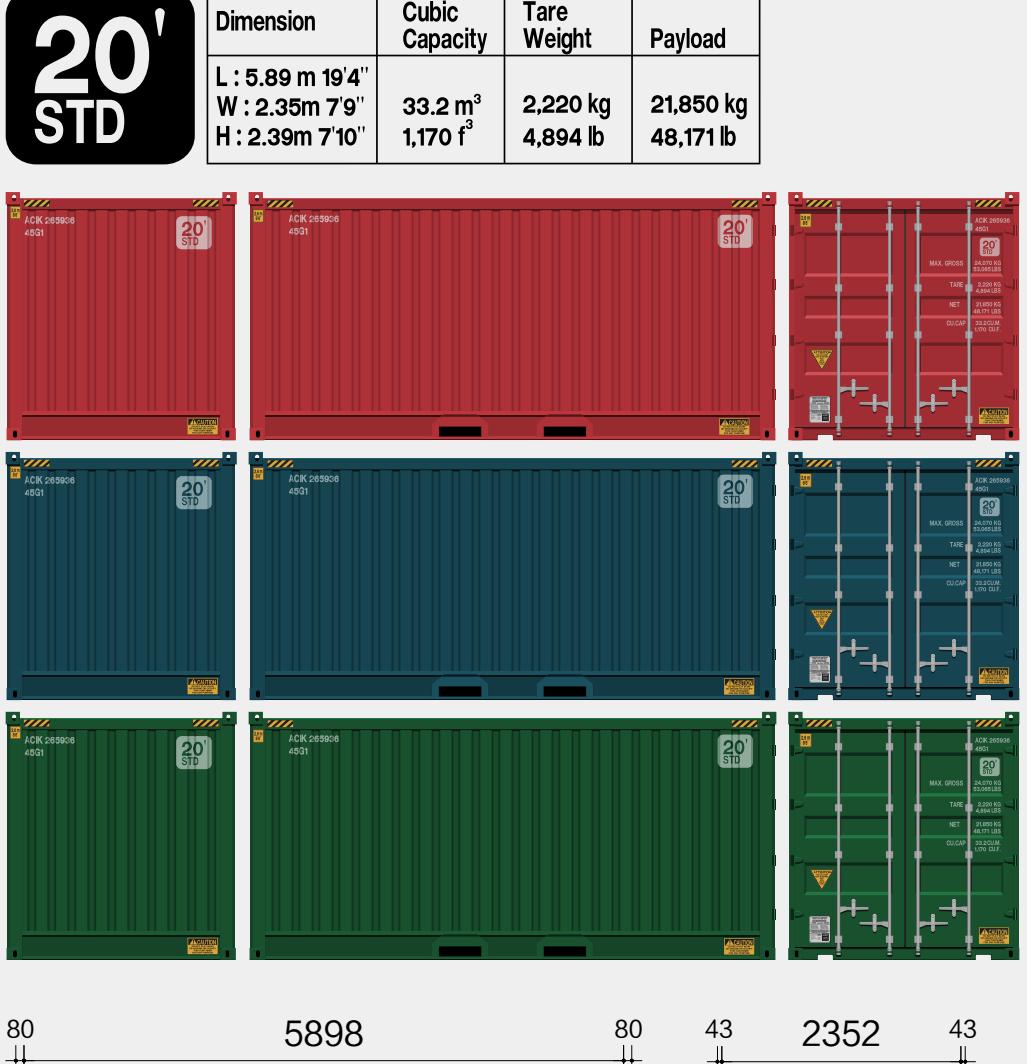

Name	Material\ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

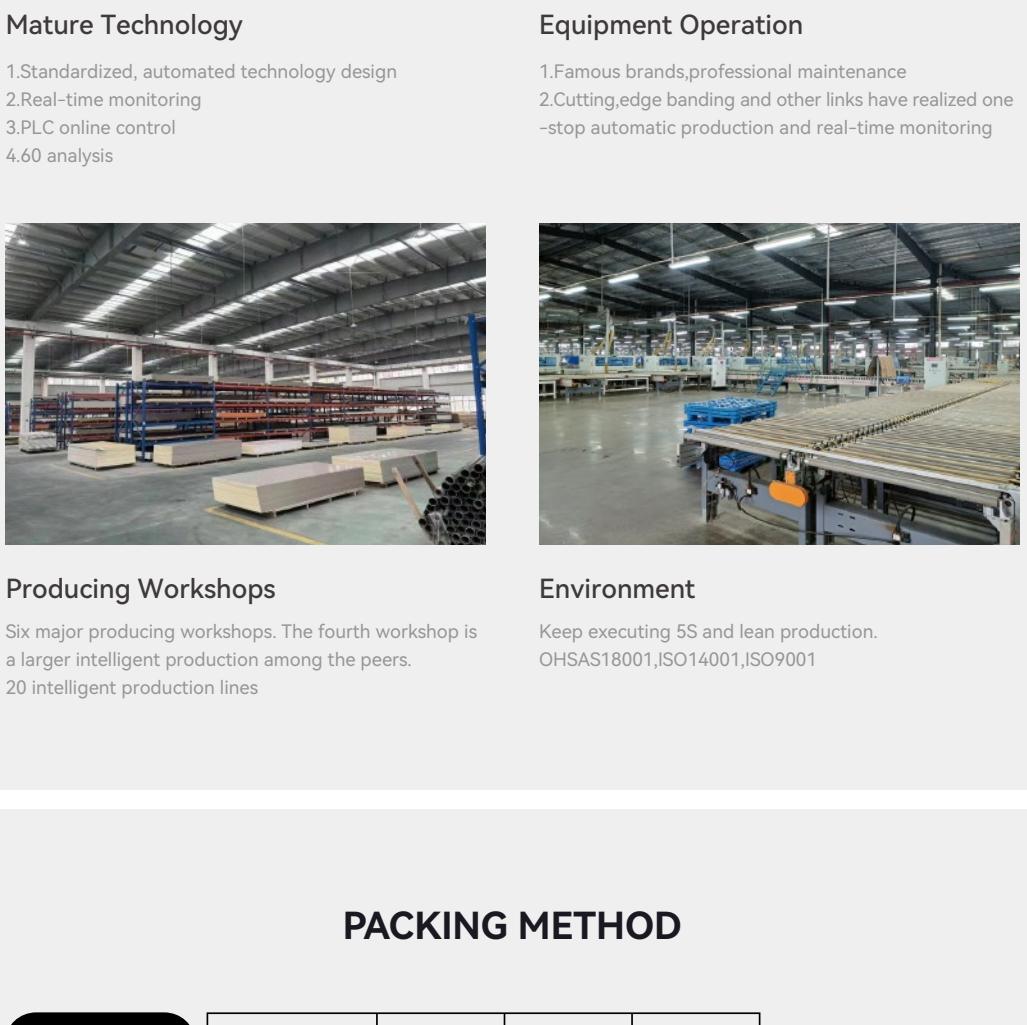

ENF

EP LEVEL

B1

FIRE RATING

Waterproof

TEST REPORT

SGS

Flame Retardant Test Report

SGS Environmental Test Report

Reach

EU Highly Concerned Substance Report

SGS Formaldehyde Test Report

CE

Eu Safety Certification

MORE METAL SERIES COLORS

