


FT 25710




PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm



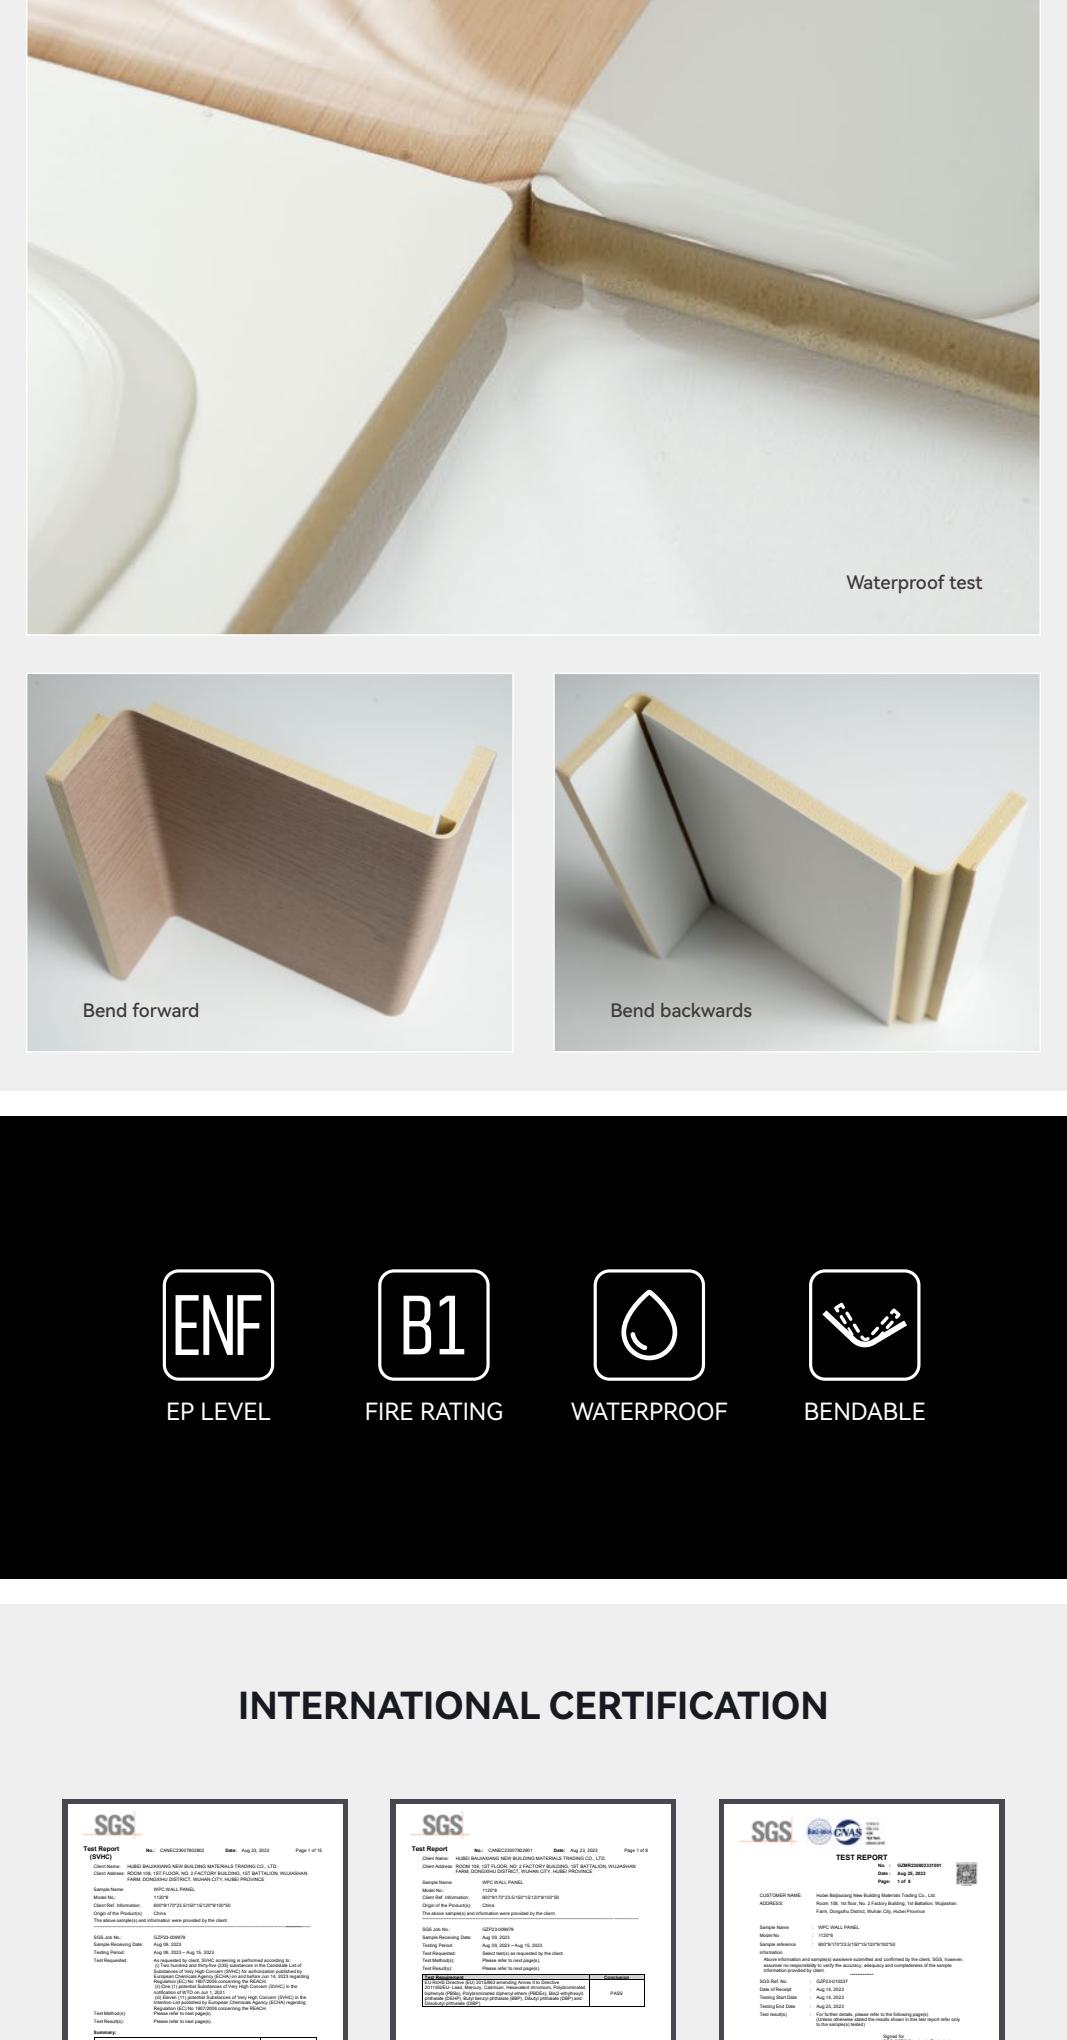


PRODUCT INFORMATION

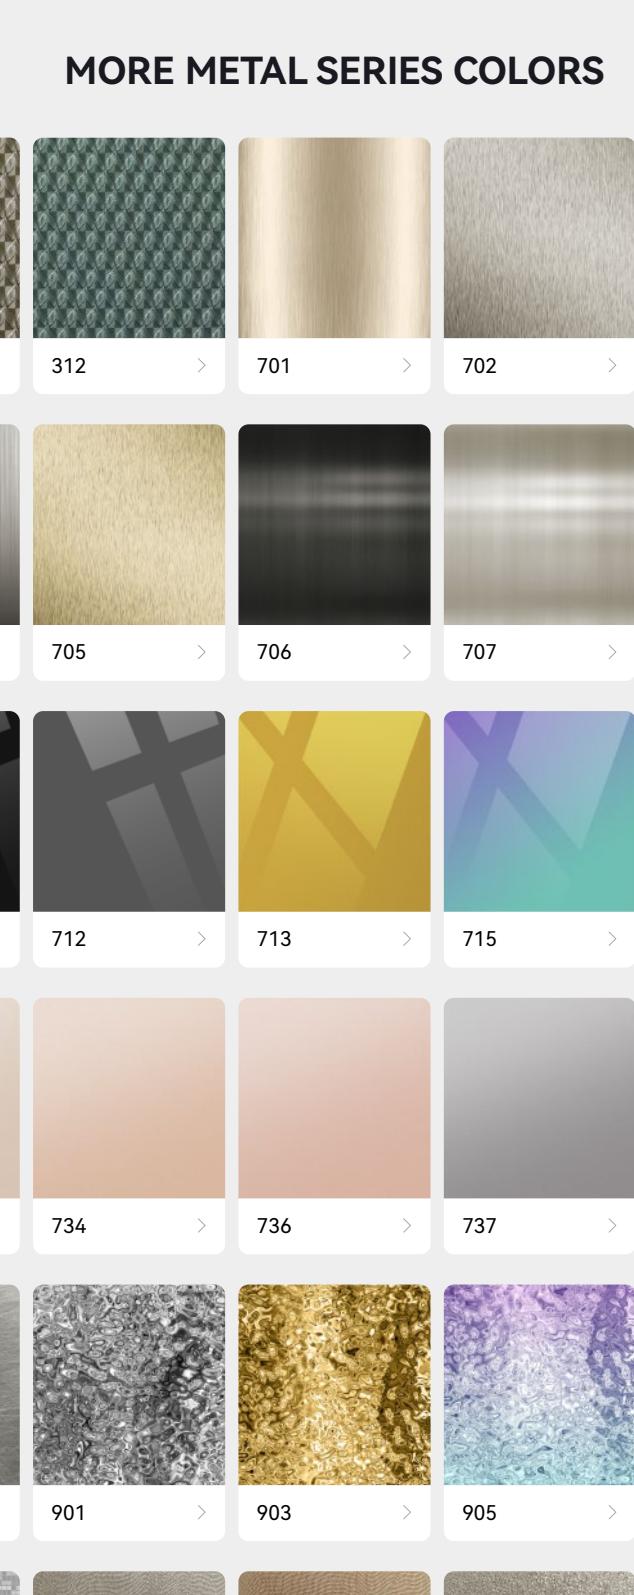

Name	Material\ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+ Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

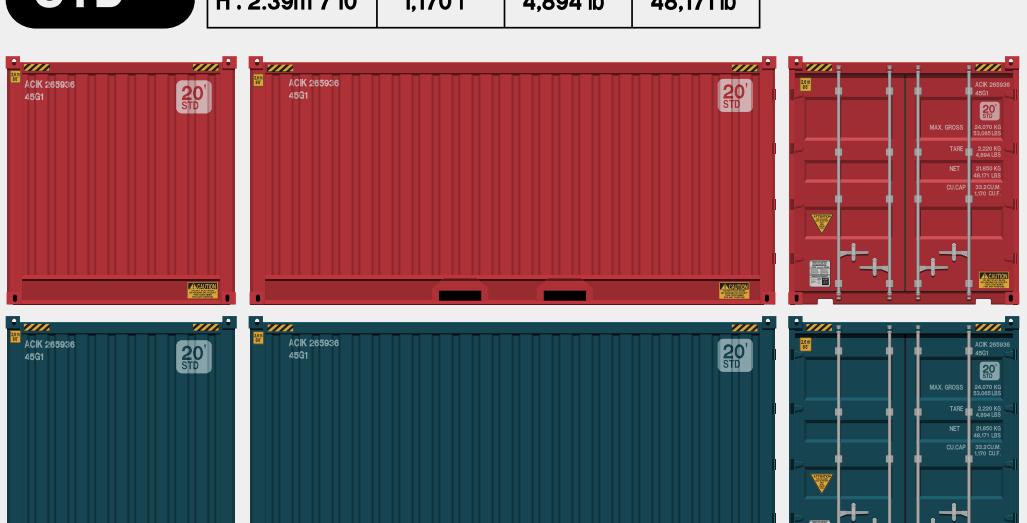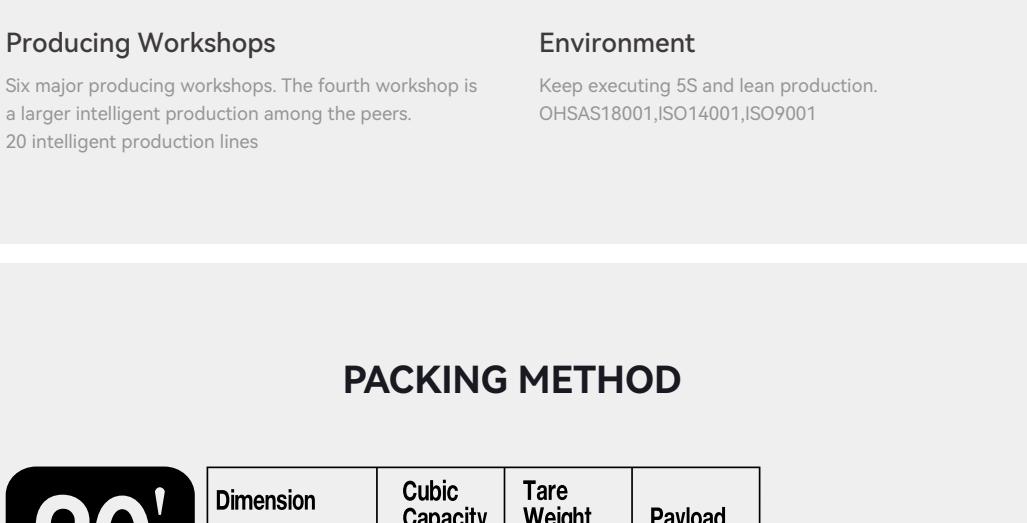

EP LEVEL



FIRE RATING




WATERPROOF



BENDABLE

INTERNATIONAL CERTIFICATION



20正常装货柜尺寸

Dimension

Cubic Capacity

Tare Weight

Payload

L:12.03m 39'6"

W:2.35m 7'9"

H:2.30m 7'10"

33.2 m³

1,170 f³

2,220 kg

2,894 lb

58,996 lb

40正常装货柜尺寸