

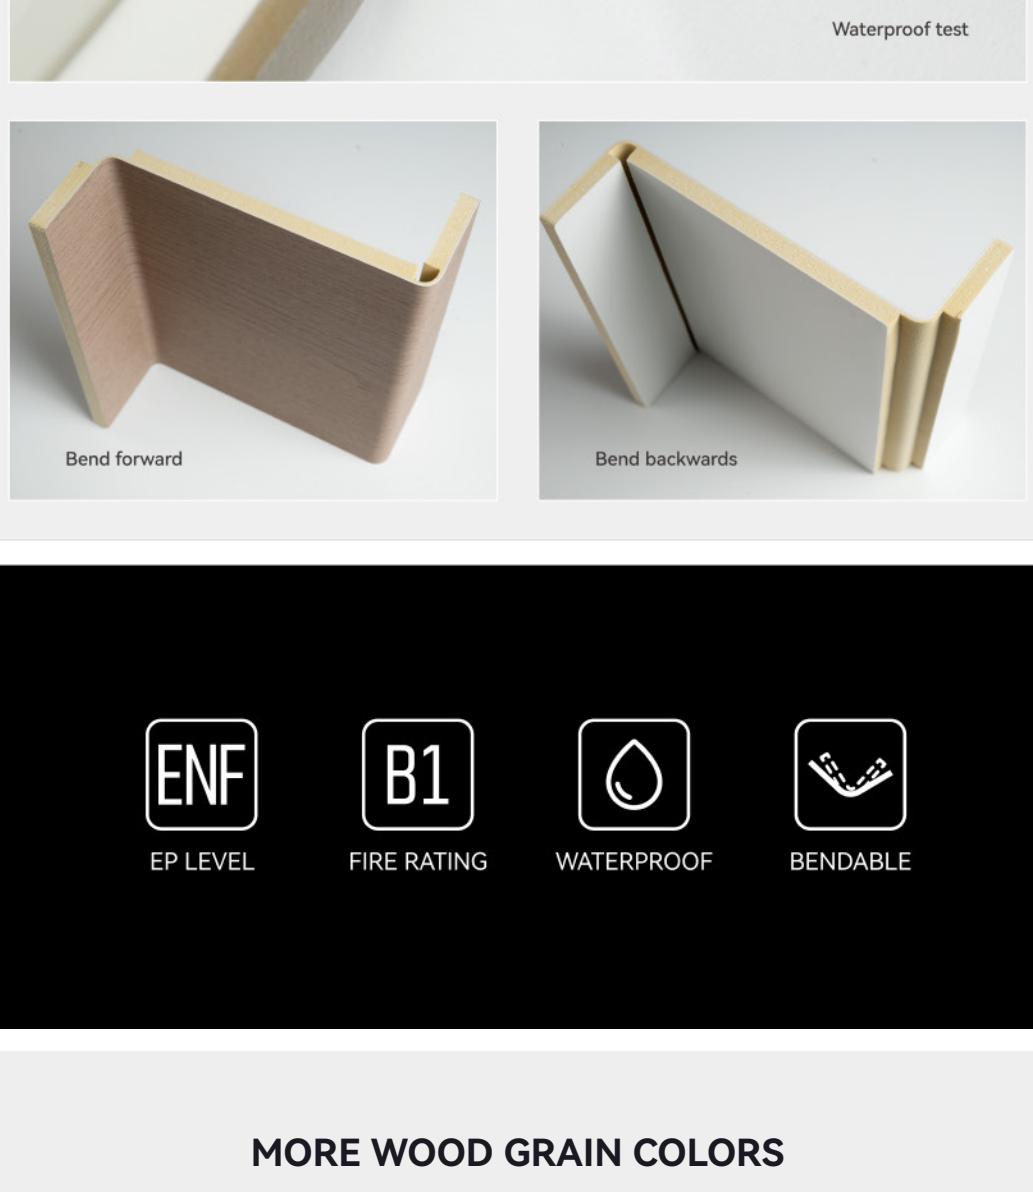


- WOOD GRAIN -

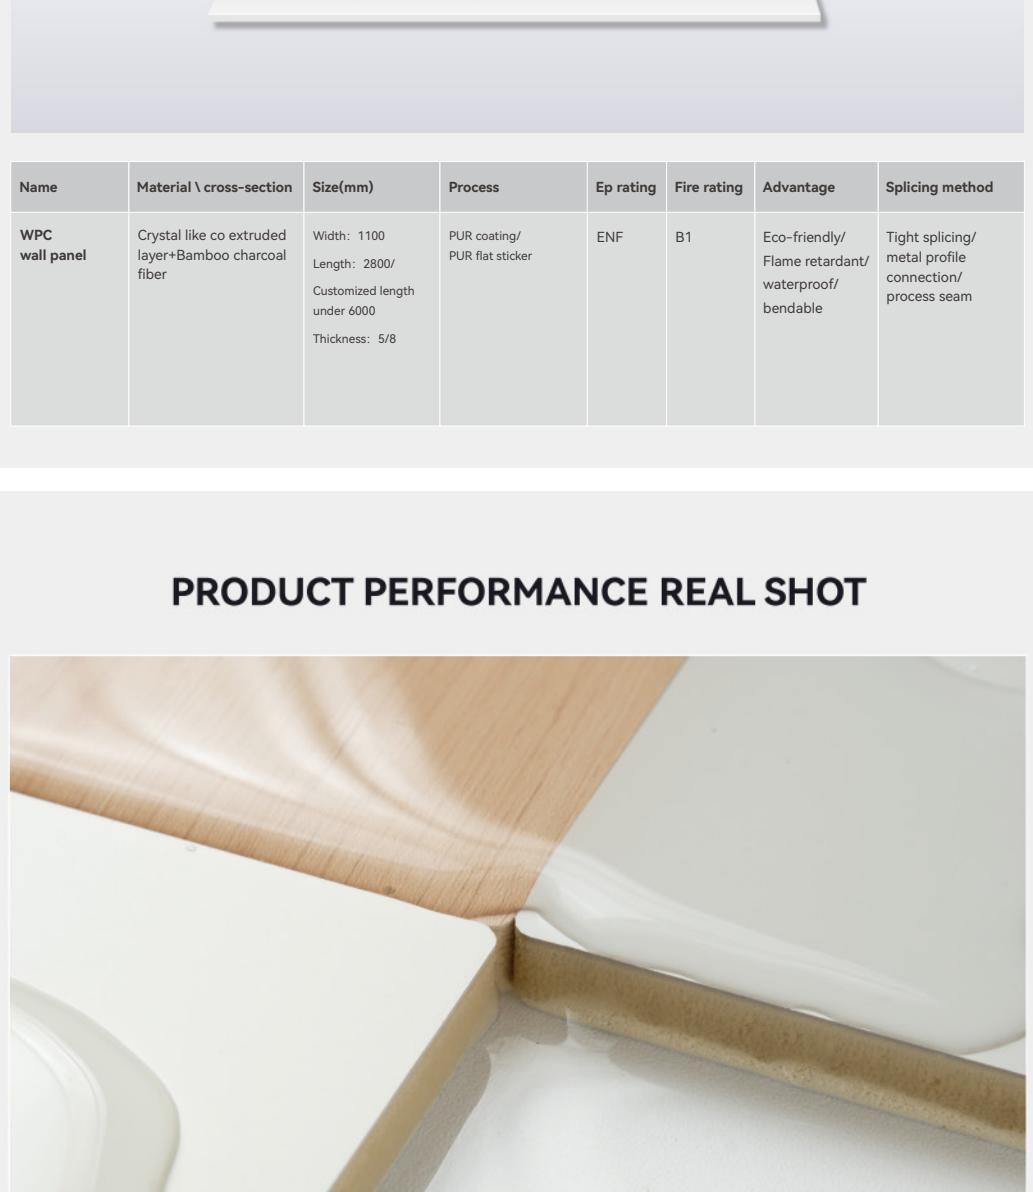

8022

COLOR NUMBER

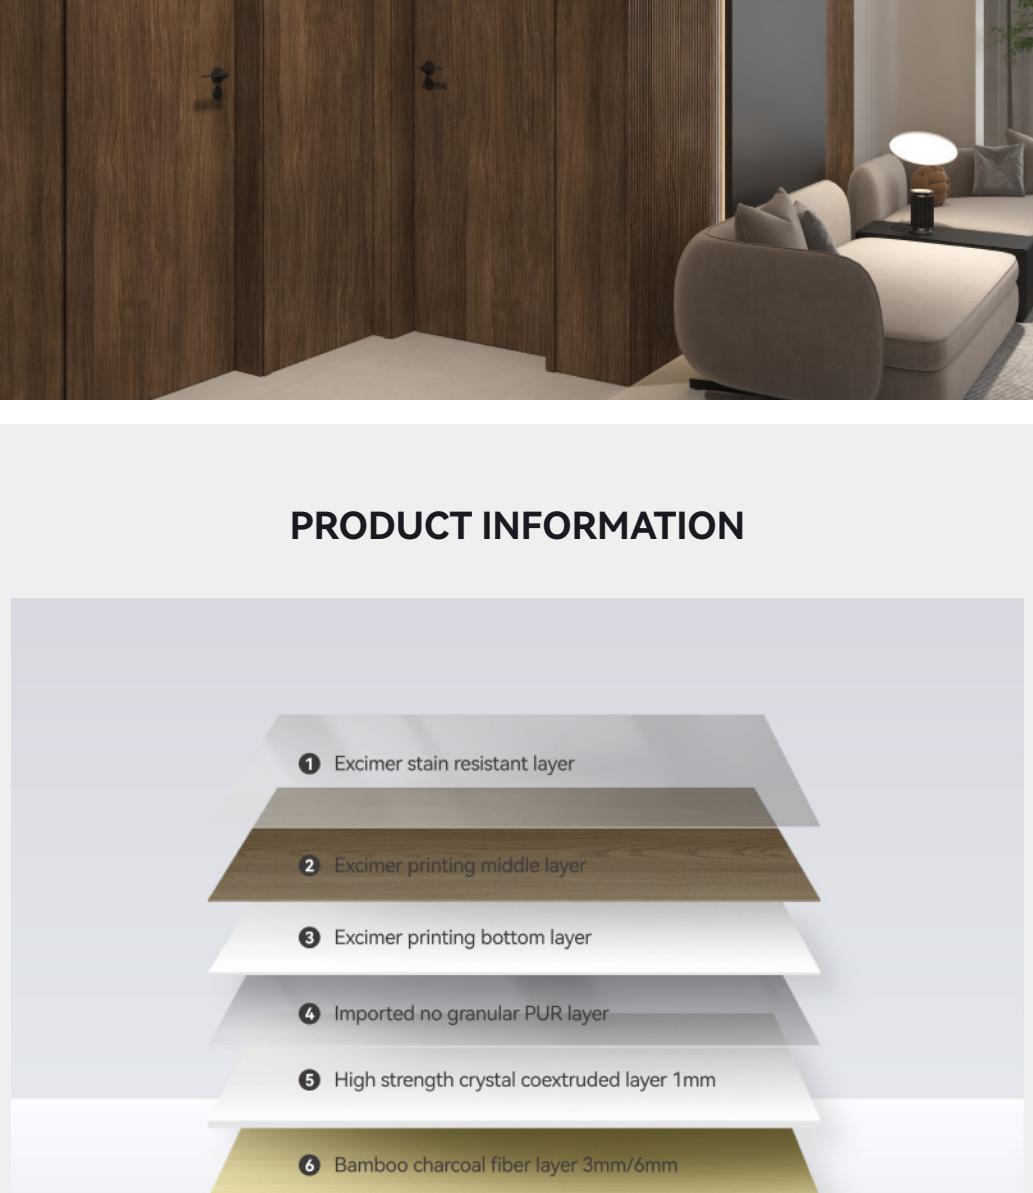


## PRODUCT INFORMATION







Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile/ process seam


## PRODUCT PERFORMANCE REAL SHOT

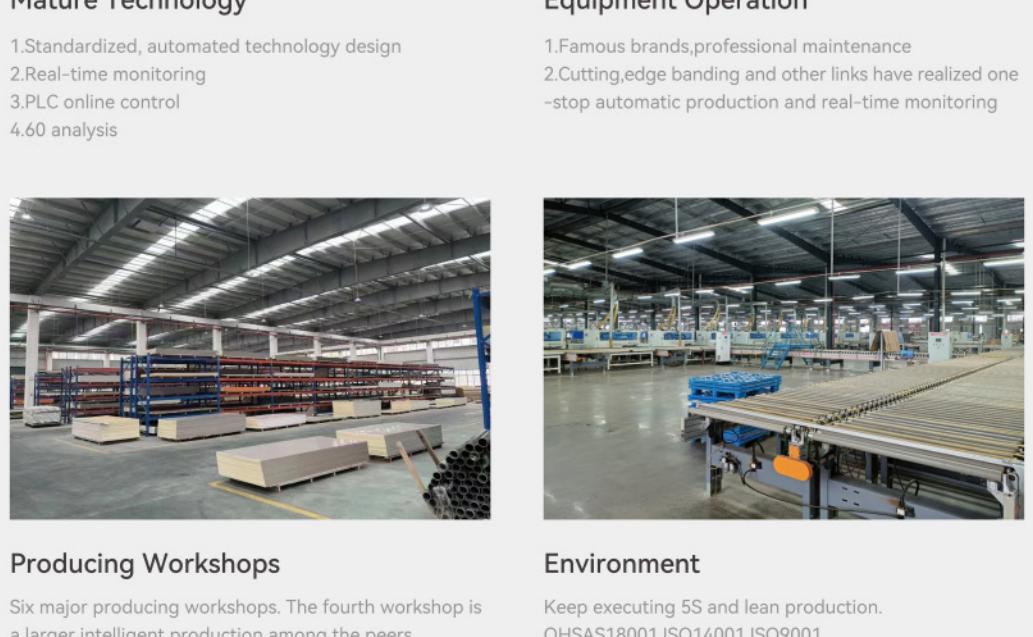

## MORE WOOD GRAIN COLORS

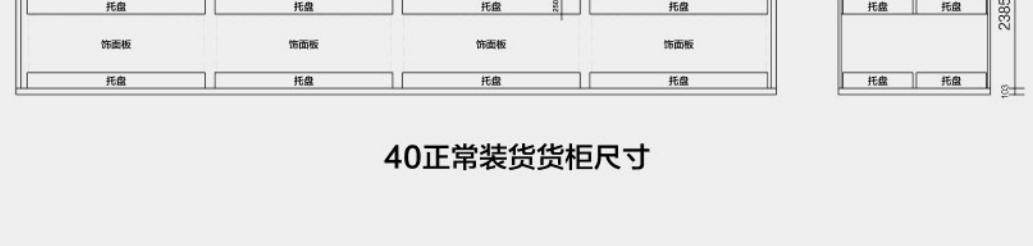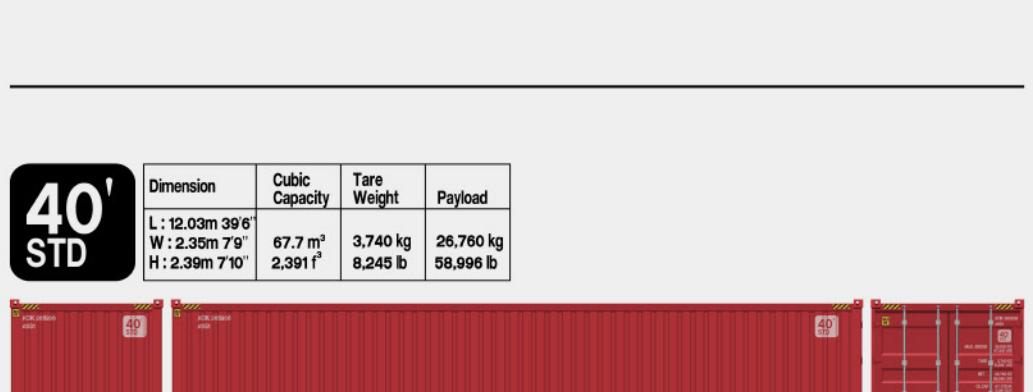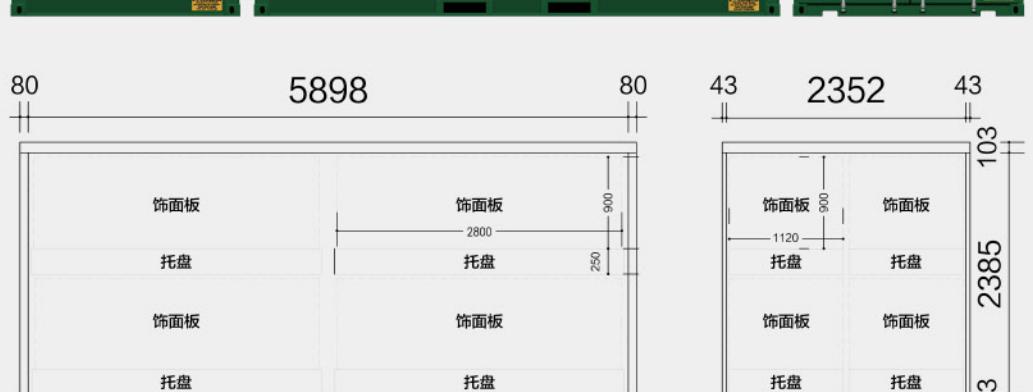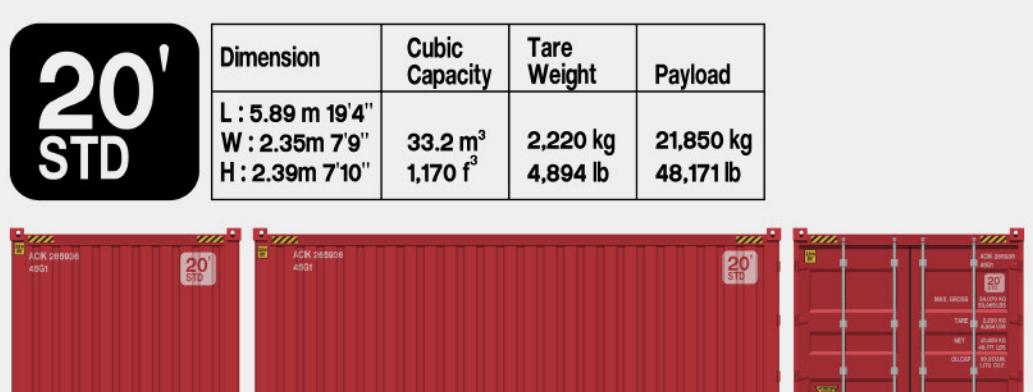

## FACTORY STRENGTH

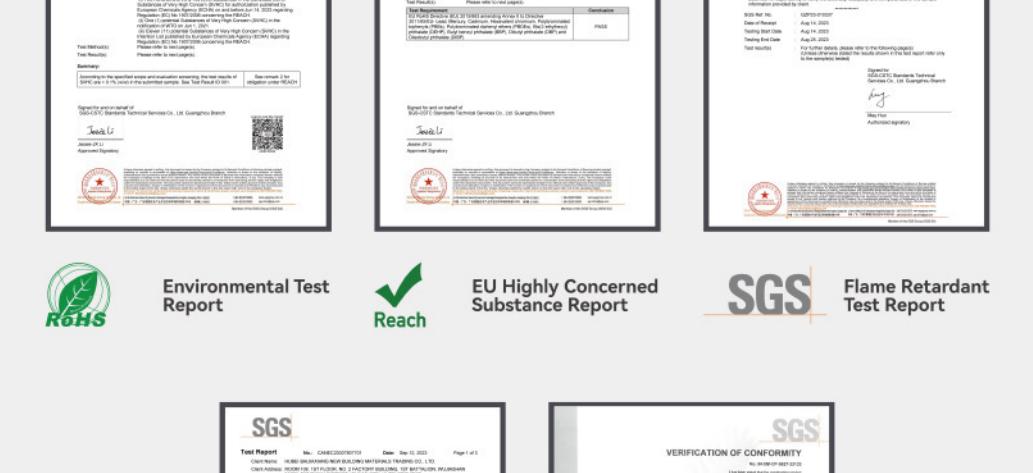

### Mature Technology

- Standardized, automated technology design
- Real-time monitoring
- PLC online control
- 4.60 analysis



### Equipment Operation


- Famous brands, professional maintenance
- Cutting-edge banding and other links have realized one-stop automatic production and real-time monitoring




### Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

Keep executing 5S and lean production.  
OHSAS18001, ISO14001, ISO9001

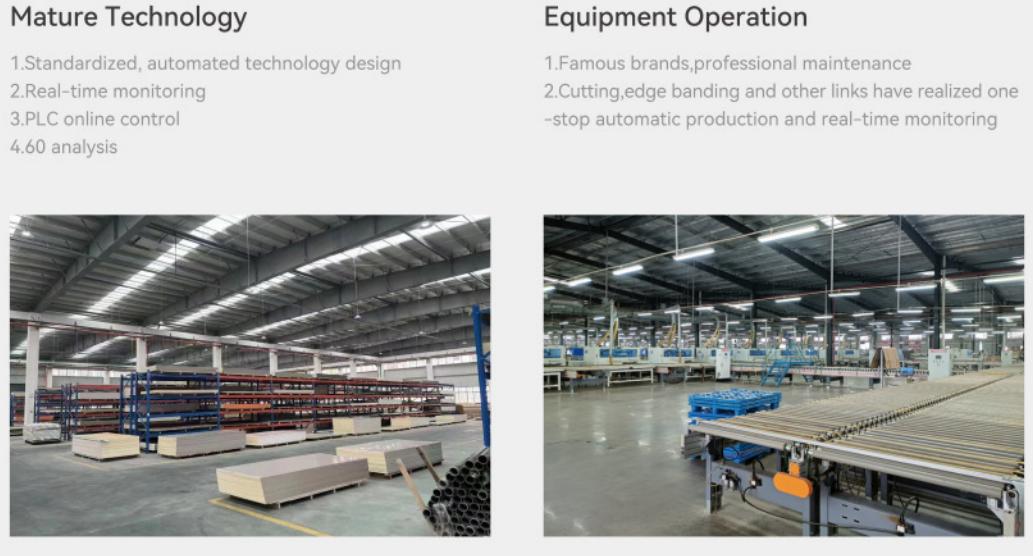


### Environment

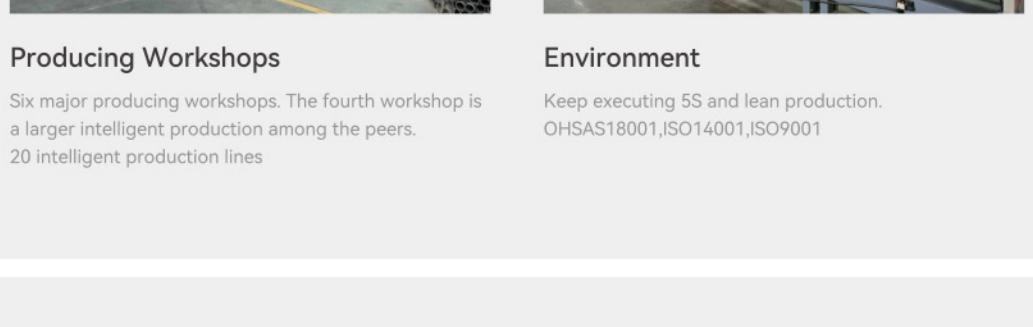

Keep executing 5S and lean production.  
OHSAS18001, ISO14001, ISO9001

## PACKING METHOD

Dimension	Cubic Capacity	Tare Weight	Payload
L: 5.89 m 19'4" W: 2.35m 79' H: 2.39m 710"	33.2 m <sup>3</sup> 1,170 f <sup>3</sup>	2,220 kg 4,894 lb	21,850 kg 48,171 lb

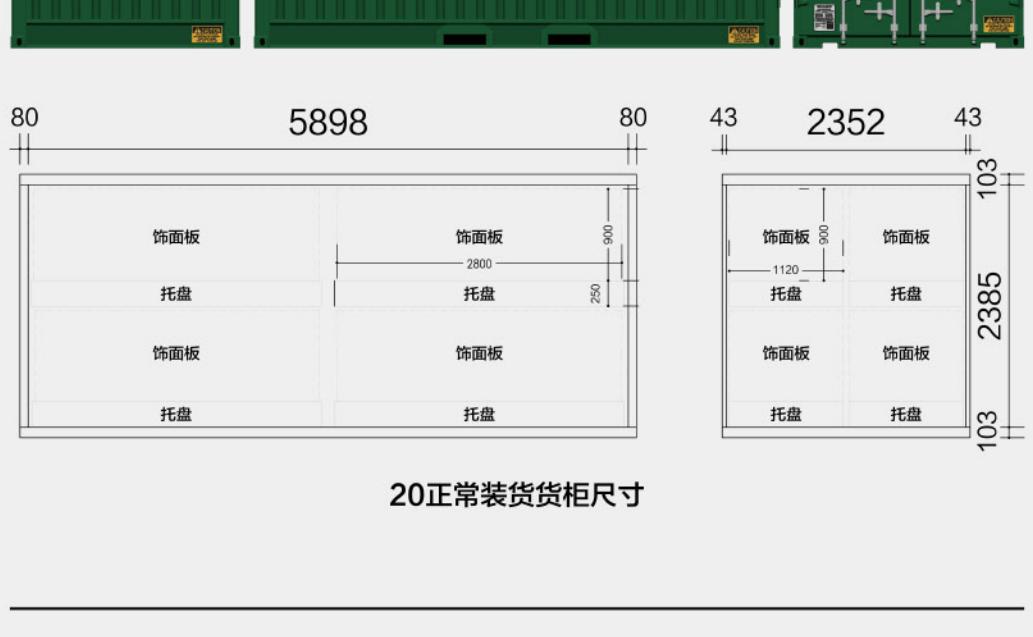

20正常装货柜尺寸

Dimension	Cubic Capacity	Tare Weight	Payload
L: 12.05m 39'6" W: 2.35m 79' H: 2.39m 710"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	2,740 kg 5,996 lb	26,760 kg 58,996 lb



40正常装货柜尺寸