


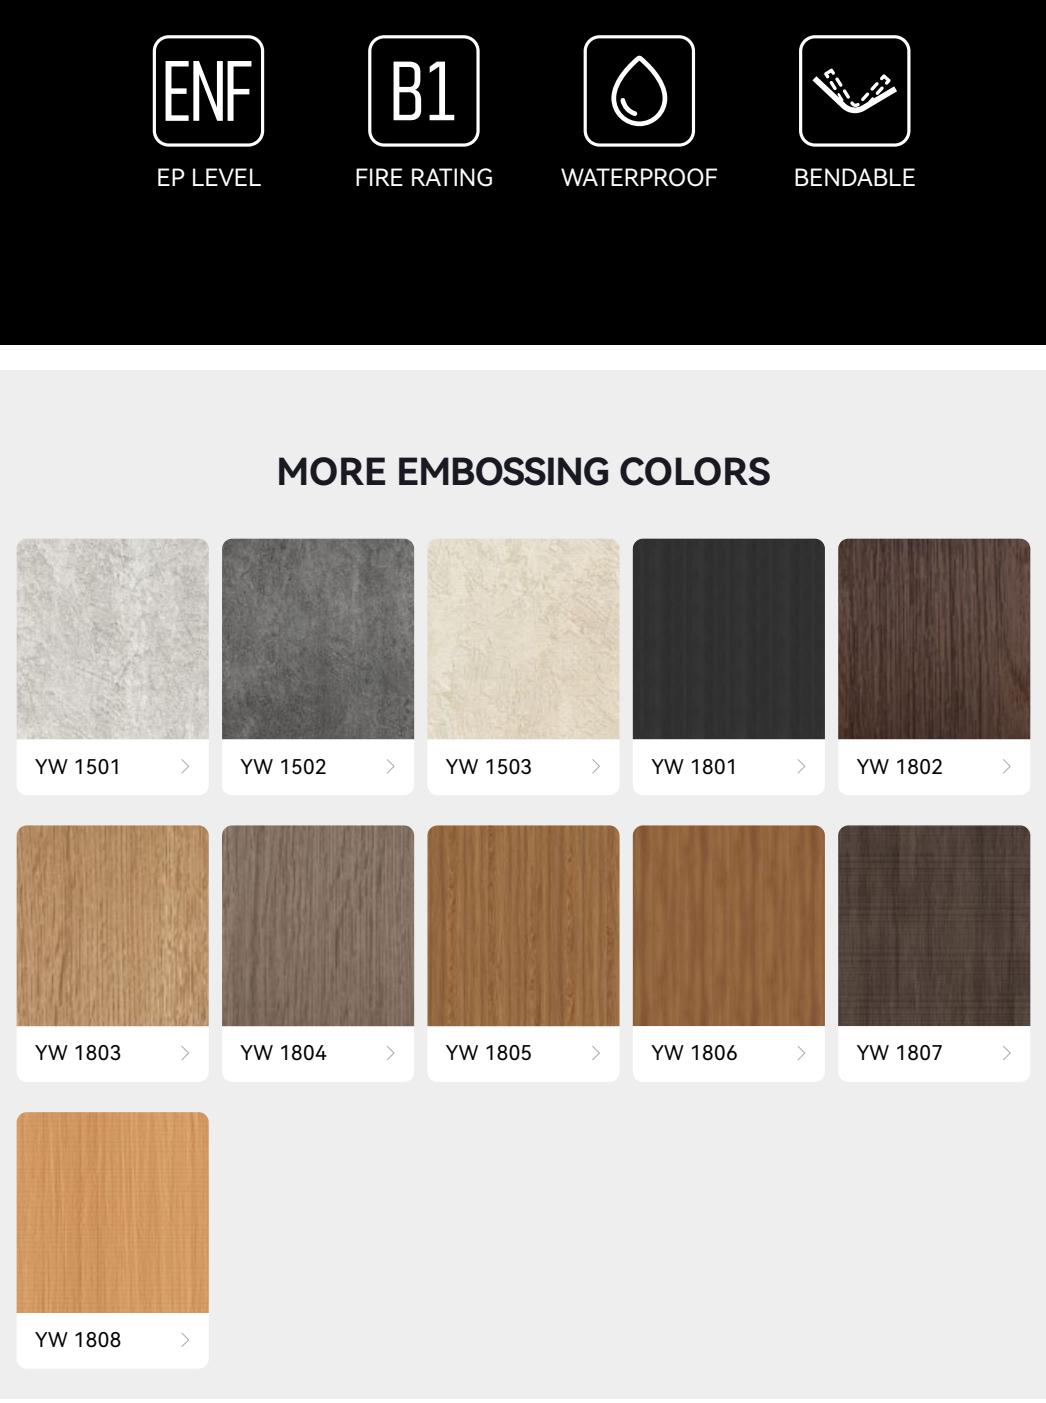


YW 1503

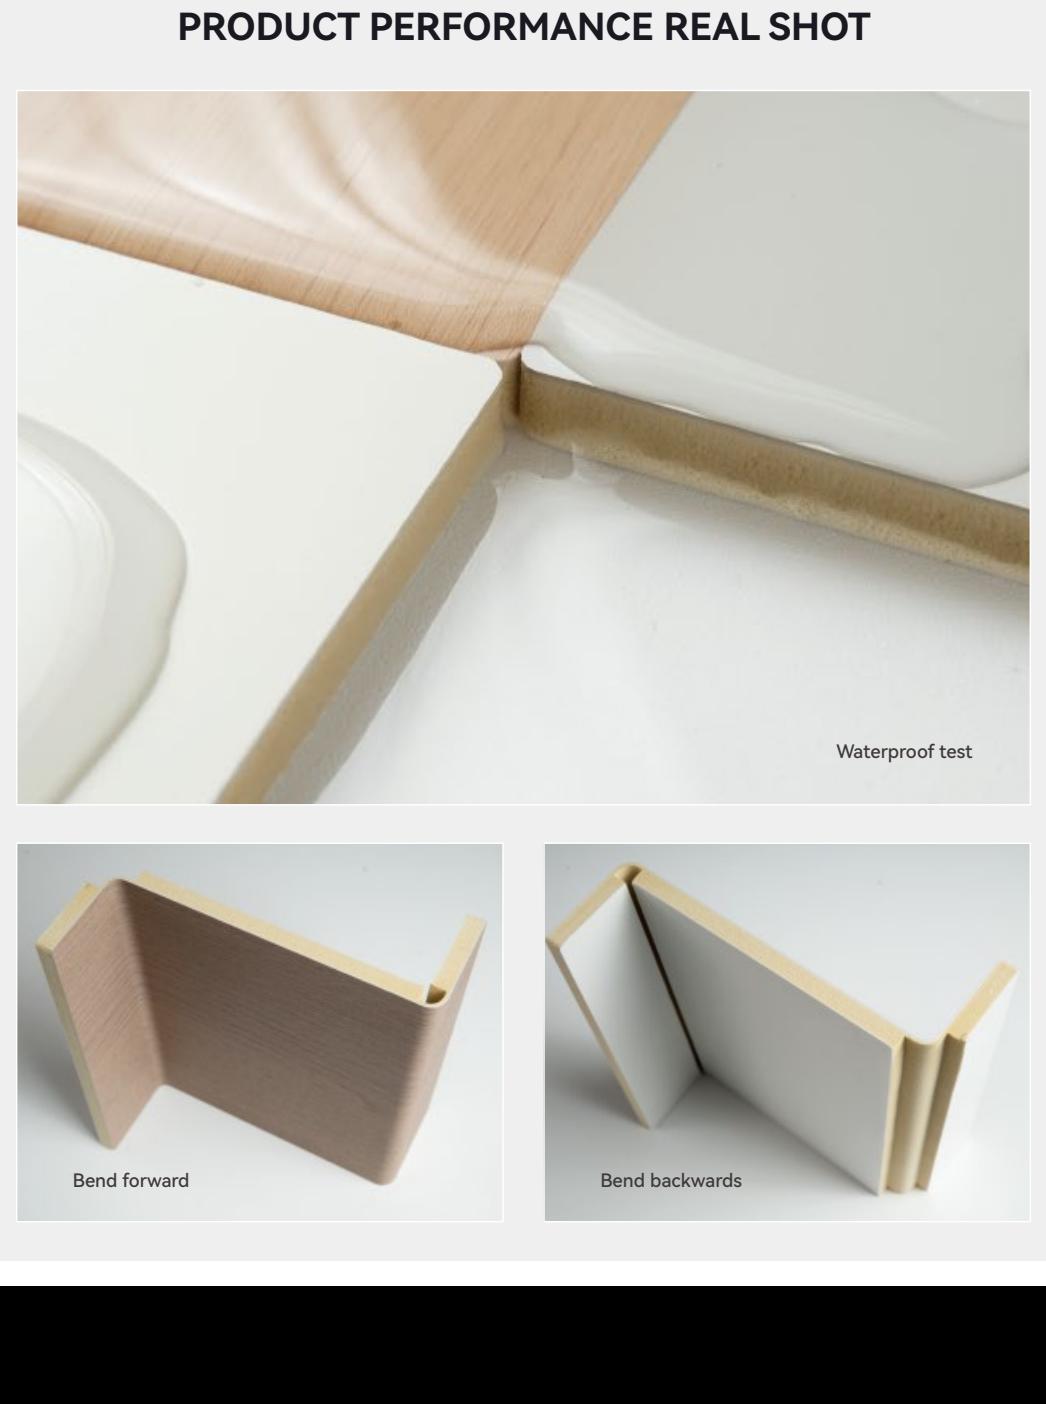


PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

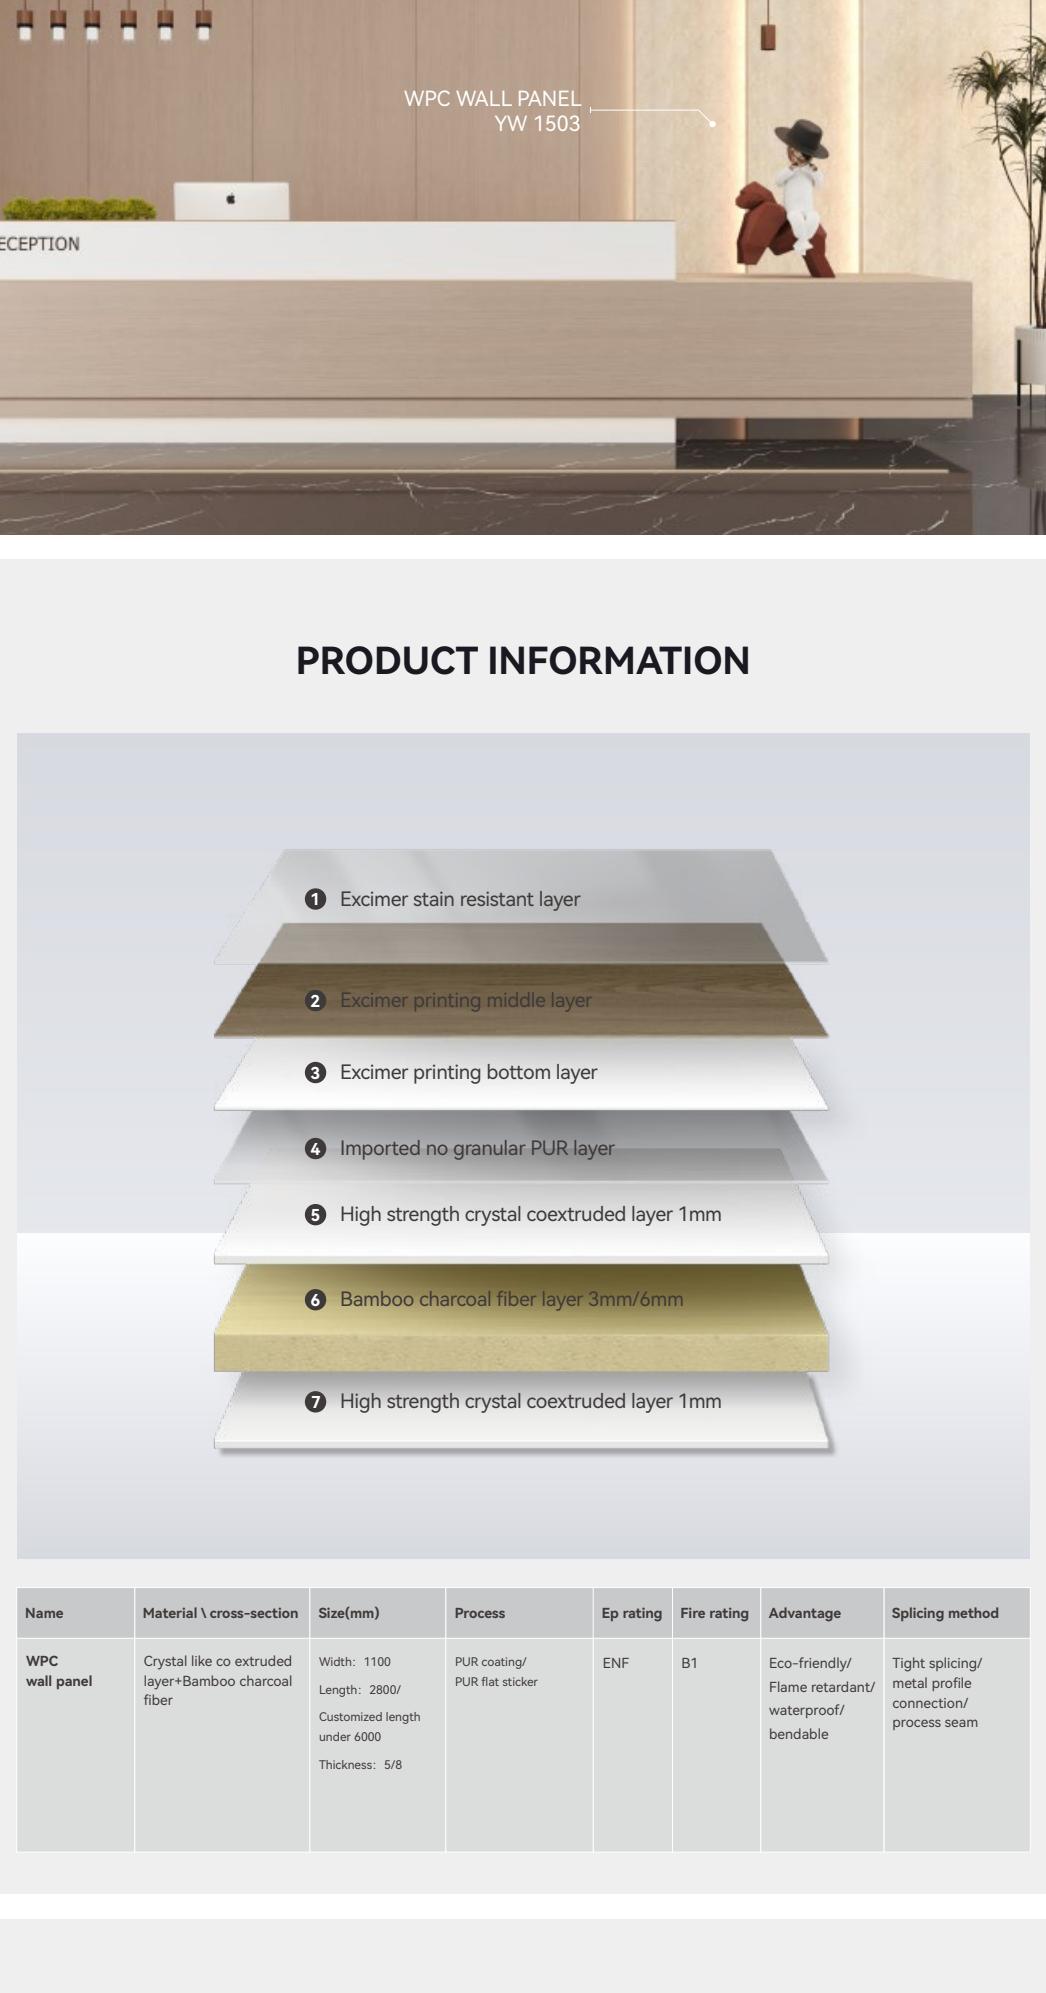


PRODUCT INFORMATION

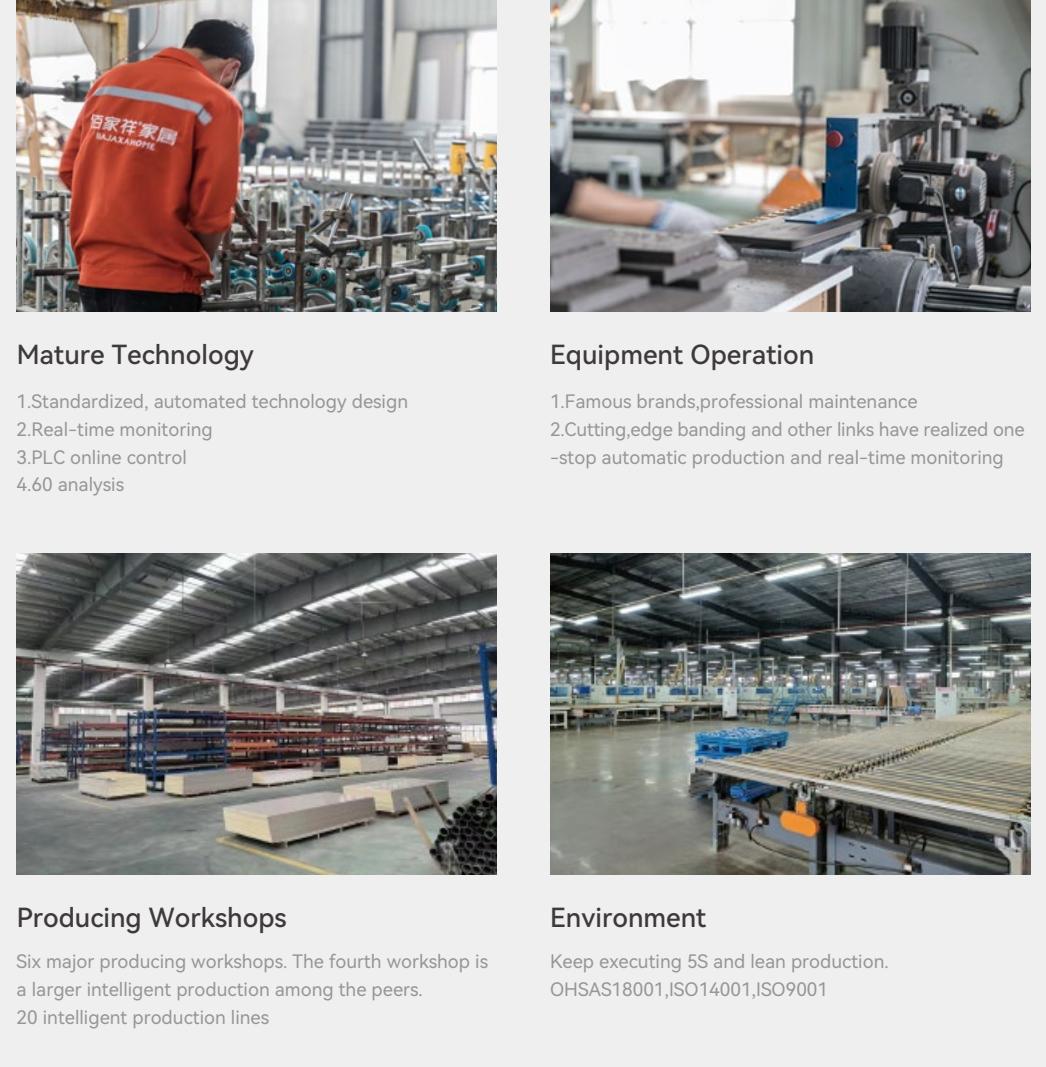

Name	Material/cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

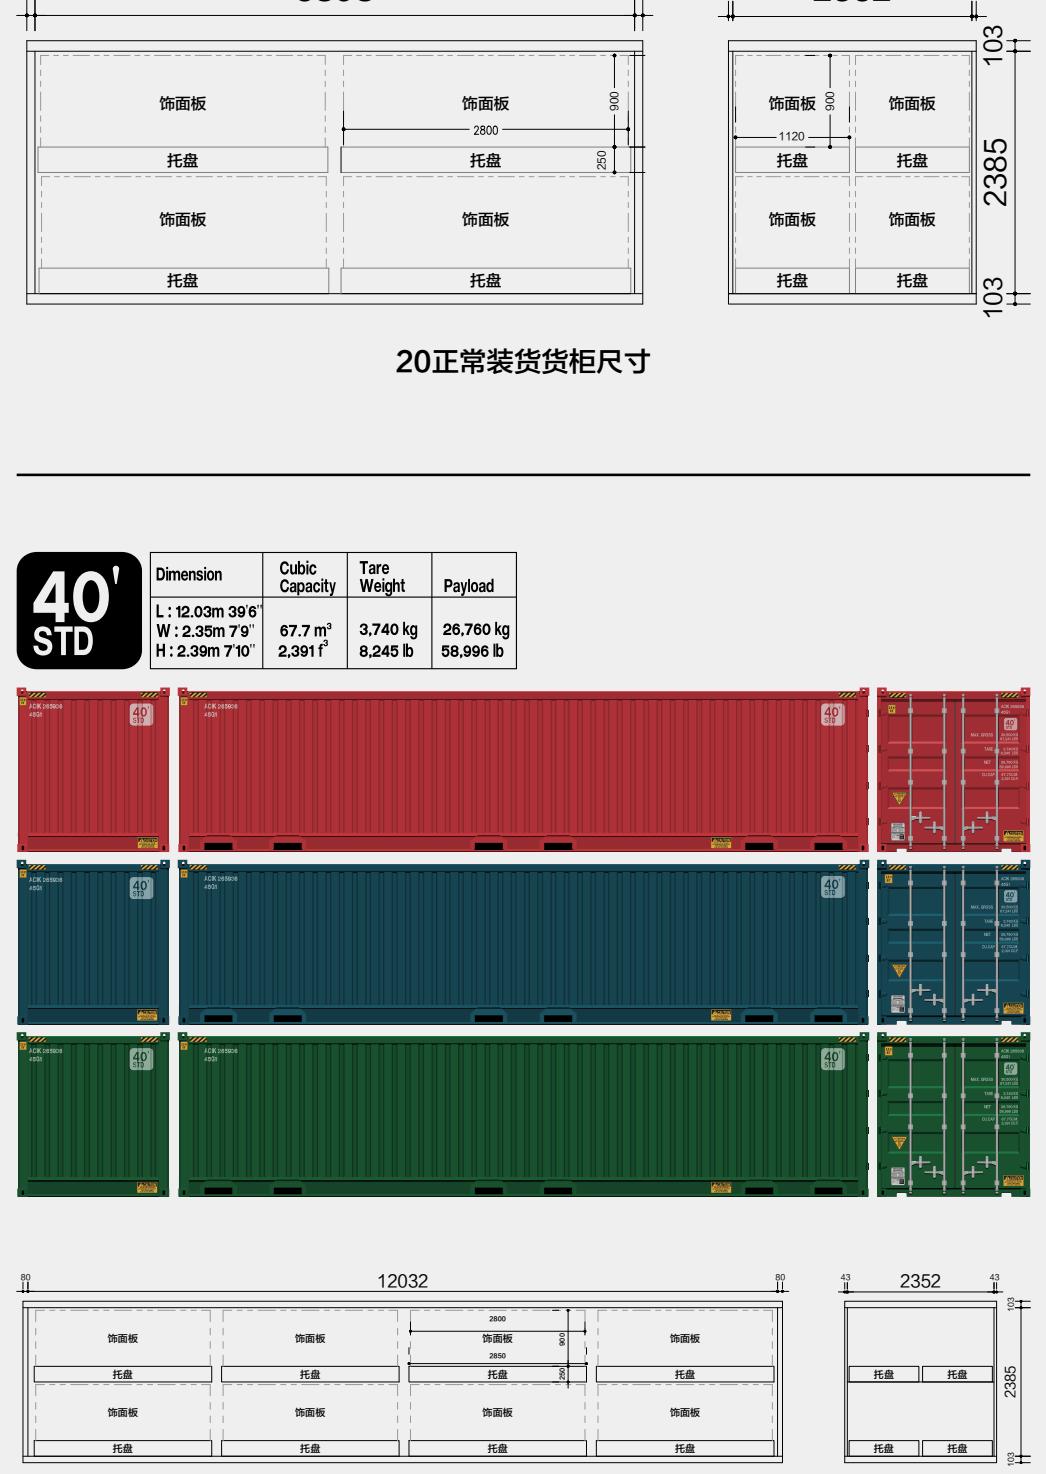

PACKING METHOD

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 5.89m 19'4" W : 2.35m 7'9" H : 2.39m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 12.03m 39'6" W : 2.35m 7'9" H : 2.39m 7'10"	67.7 m ³ 2,391 f ³	3,740 kg 8,245 lb	26,760 kg 58,996 lb

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 5.89m 19'4" W : 2.35m 7'9" H : 2.39m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 12.03m 39'6" W : 2.35m 7'9" H : 2.39m 7'10"	67.7 m ³ 2,391 f ³	3,740 kg 8,245 lb	26,760 kg 58,996 lb

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 5.89m 19'4" W : 2.35m 7'9" H : 2.39m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 12.03m 39'6" W : 2.35m 7'9" H : 2.39m 7'10"	67.7 m ³ 2,391 f ³	3,740 kg 8,245 lb	26,760 kg 58,996 lb