




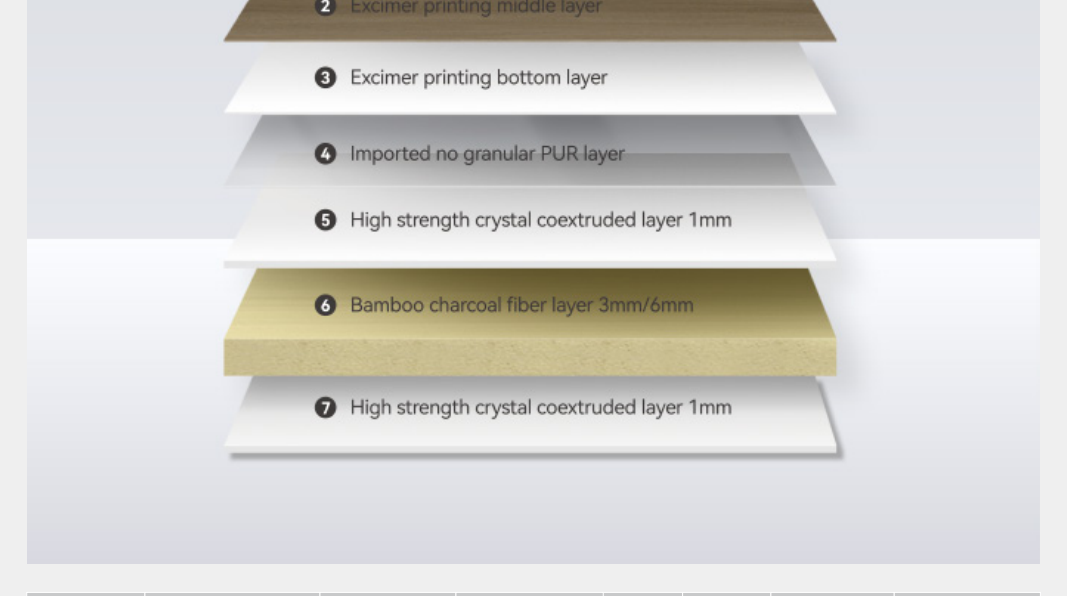

6027






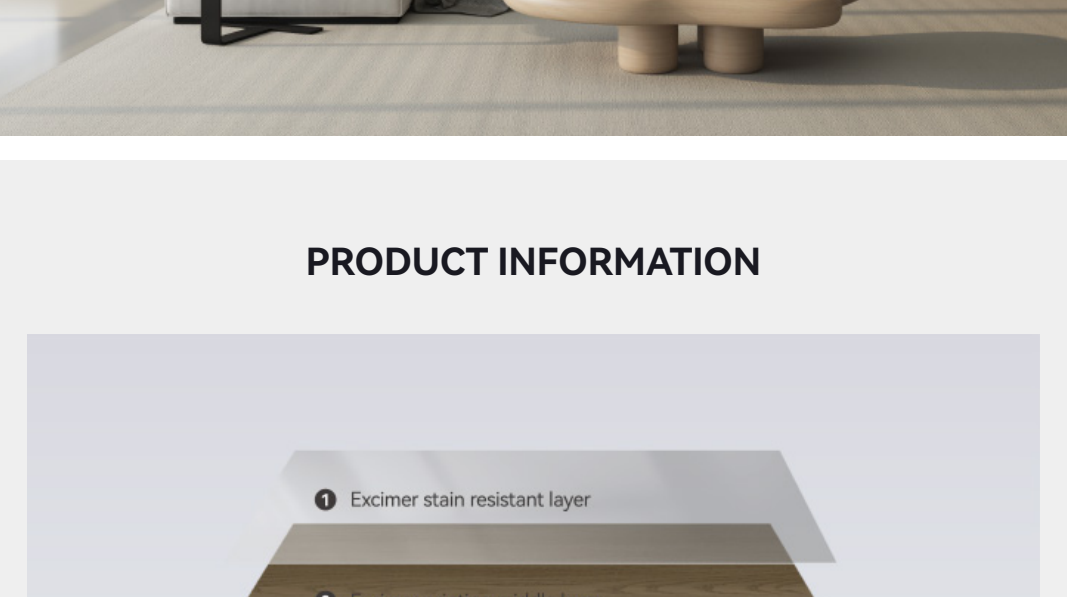


## PRODUCT INFORMATION

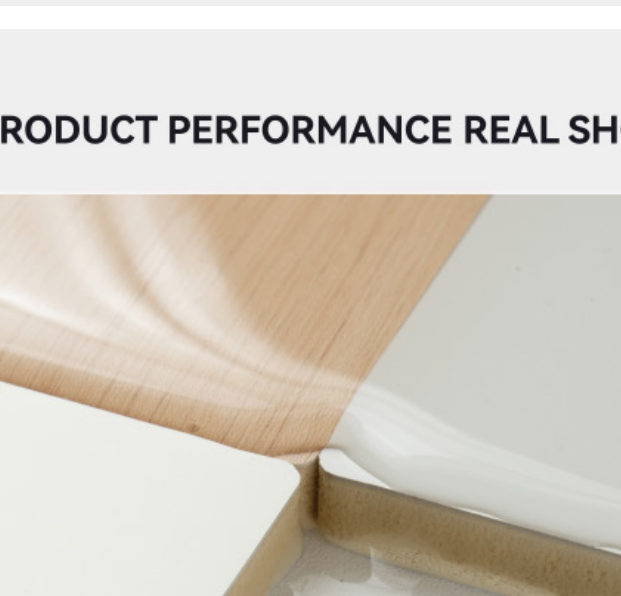


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer-Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam


## PRODUCT PERFORMANCE REAL SHOT

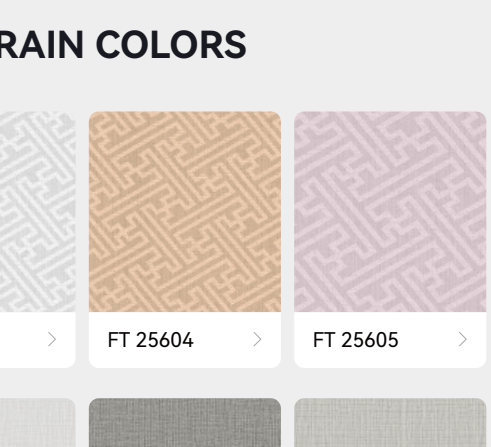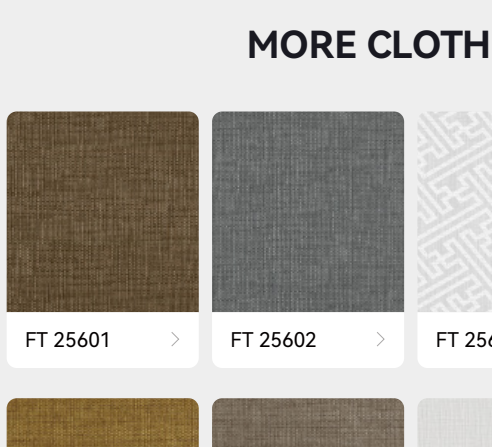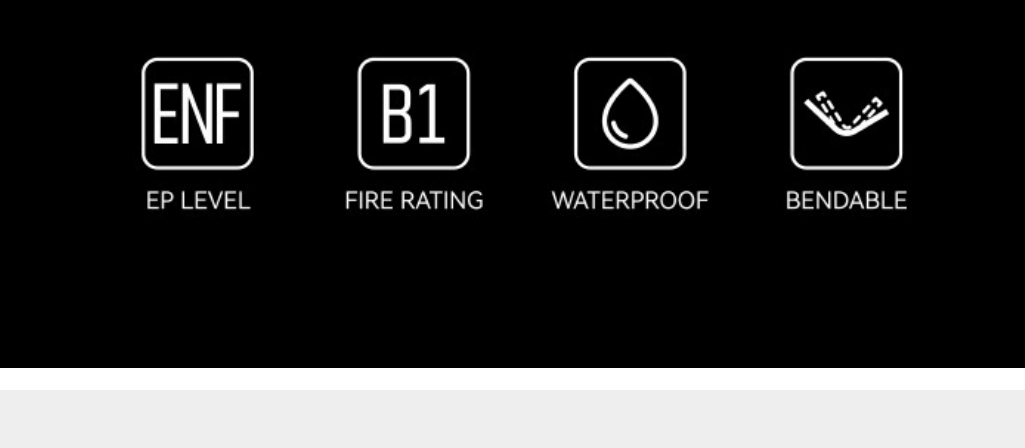

## MORE CLOTH GRAIN COLORS

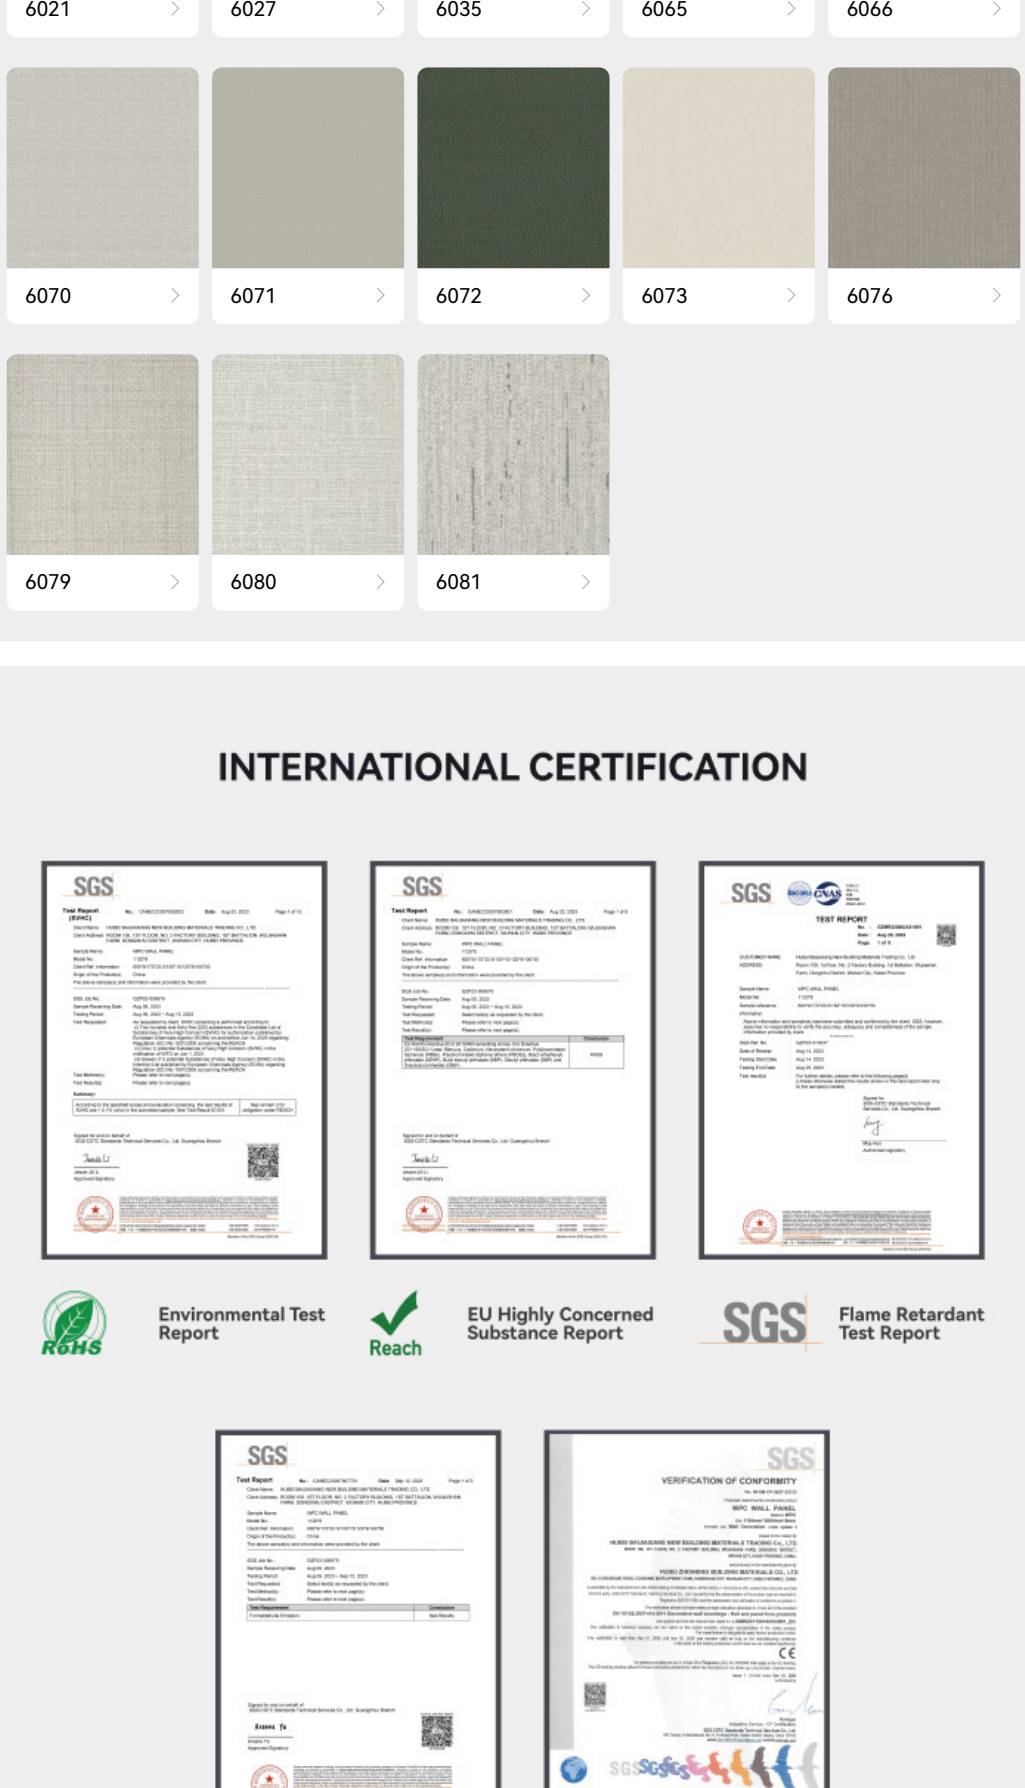


## INTERNATIONAL CERTIFICATION






Environmental Test Report



EU Highly Concerned Substance Report



Flame Retardant Test Report

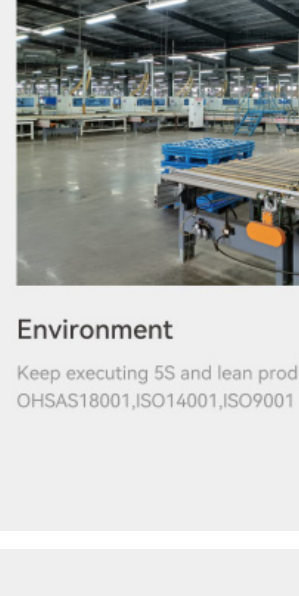
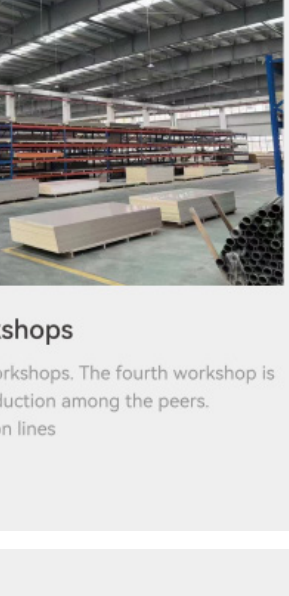


Formaldehyde Test Report



Eu Safety Certification

## FACTORY STRENGTH

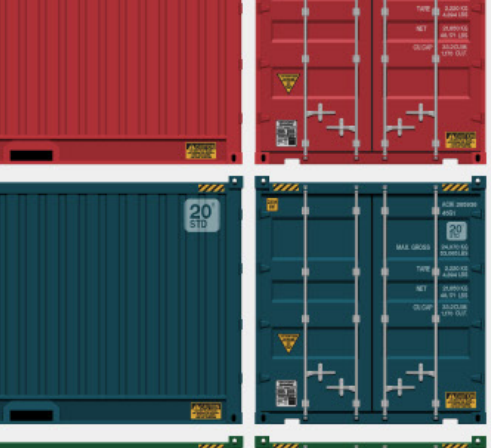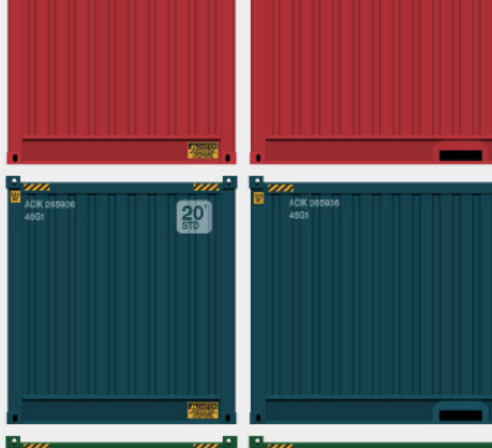

### Mature Technology

- 1.Standardized, automated technology design
- 2.Real-time monitoring
- 3.PLC online control
- 4.6D analysis

### Equipment Operation

- 1.Famous brands,professional maintenance
- 2.Cutting,edge banding and other links have realized one-stop automatic production and real-time monitoring



### Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers. 20 intelligent production lines


### Environment

Keep executing 5S and lean production. OHSAS18001,ISO14001,ISO9001

## PACKING METHOD

20' STD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4"	33.2 m³	2,220 kg	21,850 kg
W : 2.35m 7'9"	1,170 f³	4,894 lb	48,171 lb
H : 2.39m 7'10"			

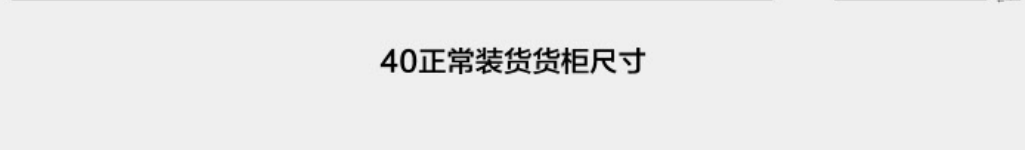

20正常装货货柜尺寸

40' STD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'6"	67.7 m³	3,740 kg	26,760 kg
W : 2.35m 7'9"	2,391 f³	8,245 lb	58,996 lb
H : 2.39m 7'10"			



40正常装货货柜尺寸