

CLOTH GRAIN

FT 25602

COLOR NUMBER

WPC WALL PANEL  
FT 25602

WPC WALL PANEL  
FT 25602

WPC WALL PANEL  
FT 25602

WPC WALL PANEL  
FT 25602

## PRODUCT INFORMATION




Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer-Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam


## PRODUCT PERFORMANCE REAL SHOT



Waterproof test

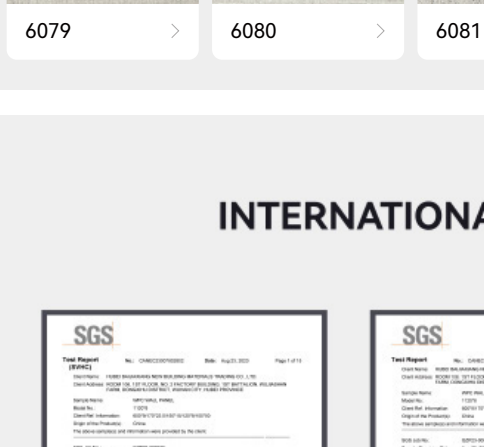

Bend forward

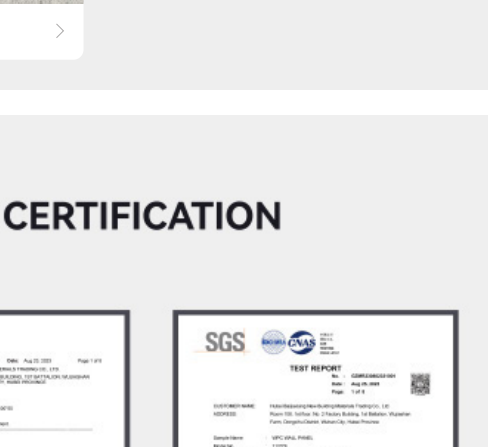


Bend backwards



EP LEVEL



FIRE RATING






WATERPROOF




BENDABLE

## MORE CLOTH GRAIN COLORS

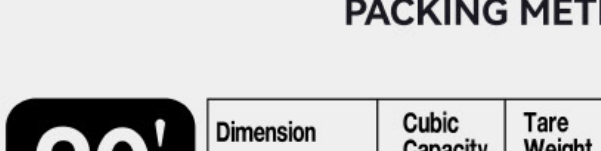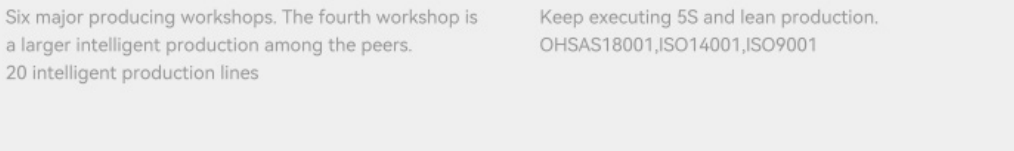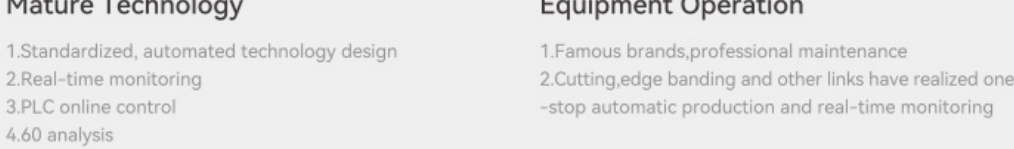

## INTERNATIONAL CERTIFICATION

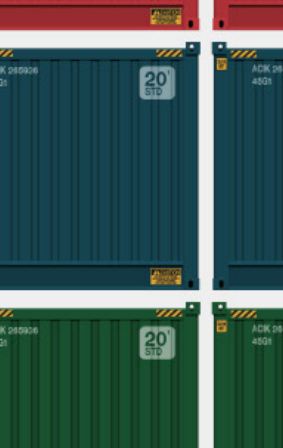

Environmental Test Report




EU Highly Concerned Substance Report



Flame Retardant Test Report




Formaldehyde Test Report

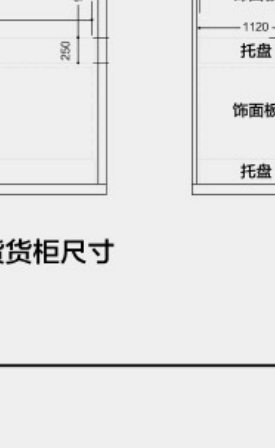


Eu Safety Certification

## FACTORY STRENGTH

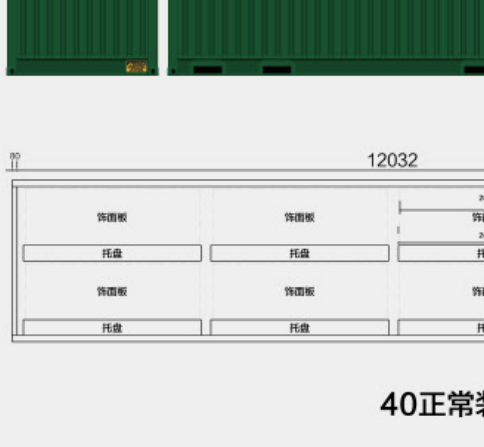

Mature Technology

- 1.Standardized, automated technology design
- 2.Real-time monitoring
- 3.PLC online control
- 4.60 analysis

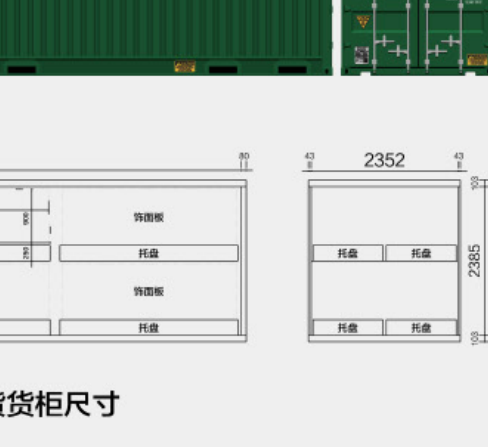

Equipment Operation

- 1.Famous brands,professional maintenance
- 2.Cutting,edge banding and other links have realized one-stop automatic production and real-time monitoring



Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers. 20 intelligent production lines



Environment

Keep executing 5S and lean production. OHSAS18001,ISO14001,ISO9001

## PACKING METHOD

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 5.89 m 19'4"			
	W : 2.35m 7'9"	33.2 m³	2,220 kg	21,850 kg
	H : 2.39m 7'10"	1,170 f³	4,894 lb	48,171 lb

