
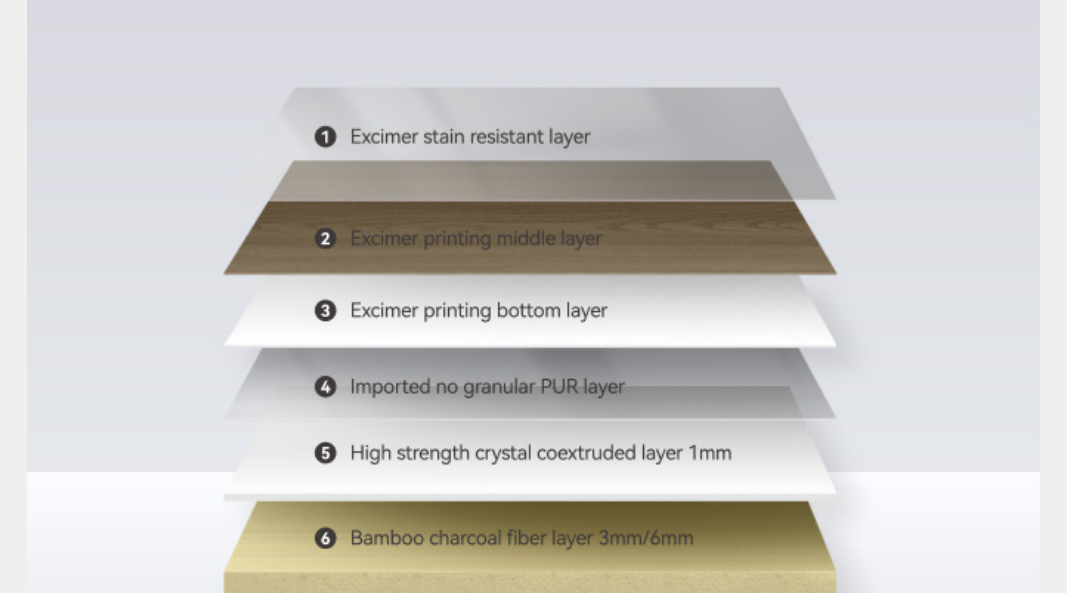


SOLID COLOR






3017
COLOR NUMBER

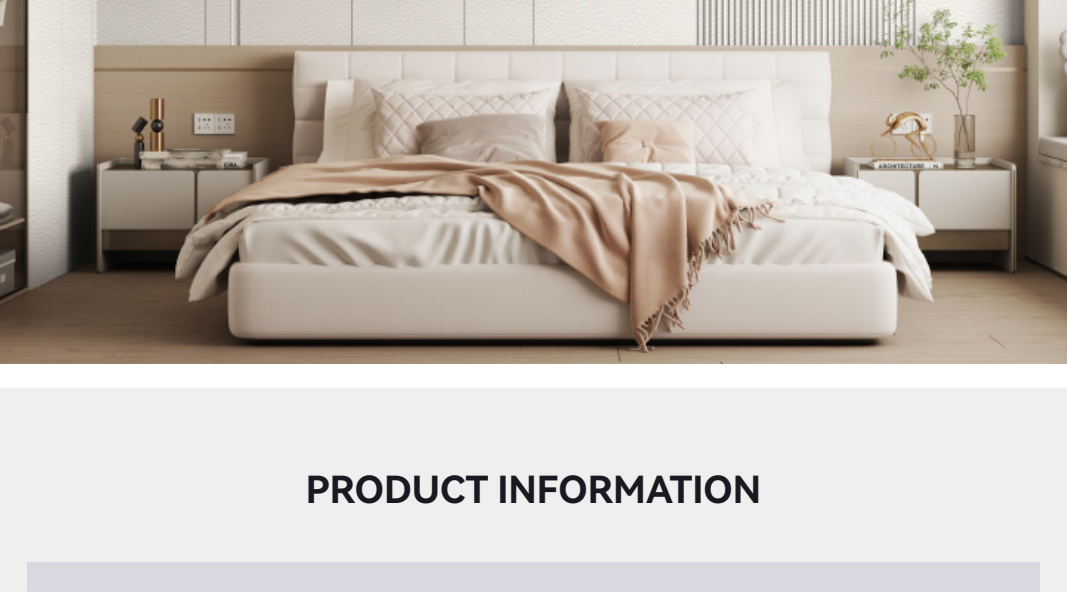


PRODUCT INFORMATION

<div><div>1</div>Excimer stain resistant layer</div> <div><div>2</div>Excimer printing middle layer</div> <div><div>3</div>Excimer printing bottom layer</div> <div><div>4</div>Imported no-granular PUR layer</div> <div><div>5</div>High strength crystal coextruded layer 1mm</div> <div><div>6</div>Bamboo charcoal fiber layer 3mm/6mm</div> <div><div>7</div>High strength crystal coextruded layer 1mm</div>							
Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

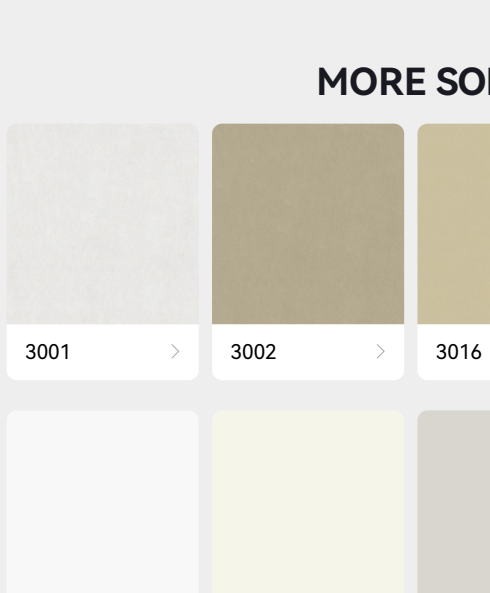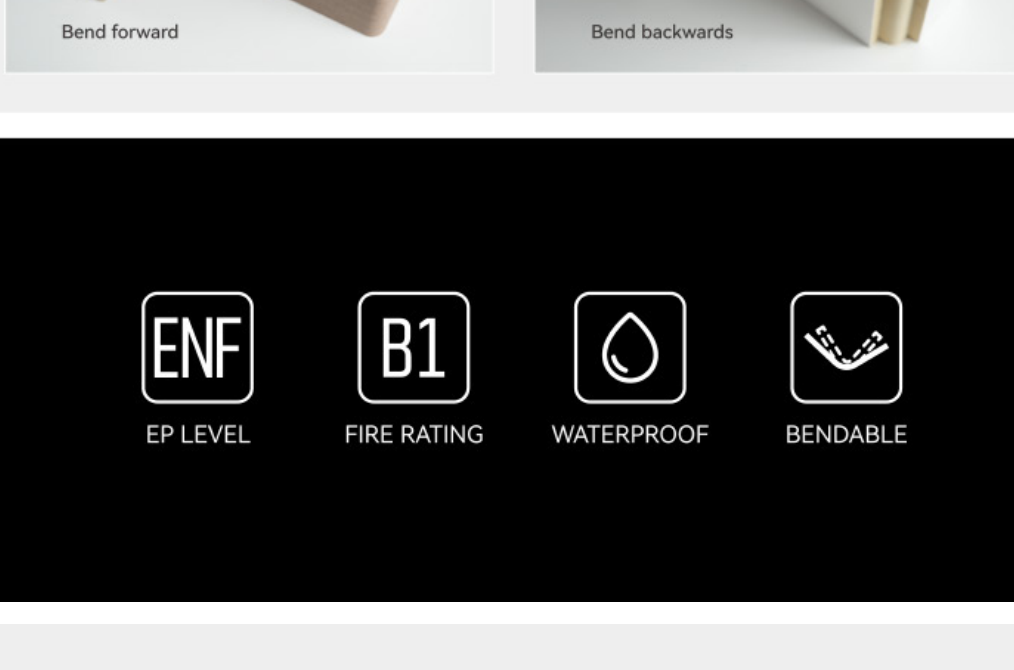



MORE SOLID COLORS

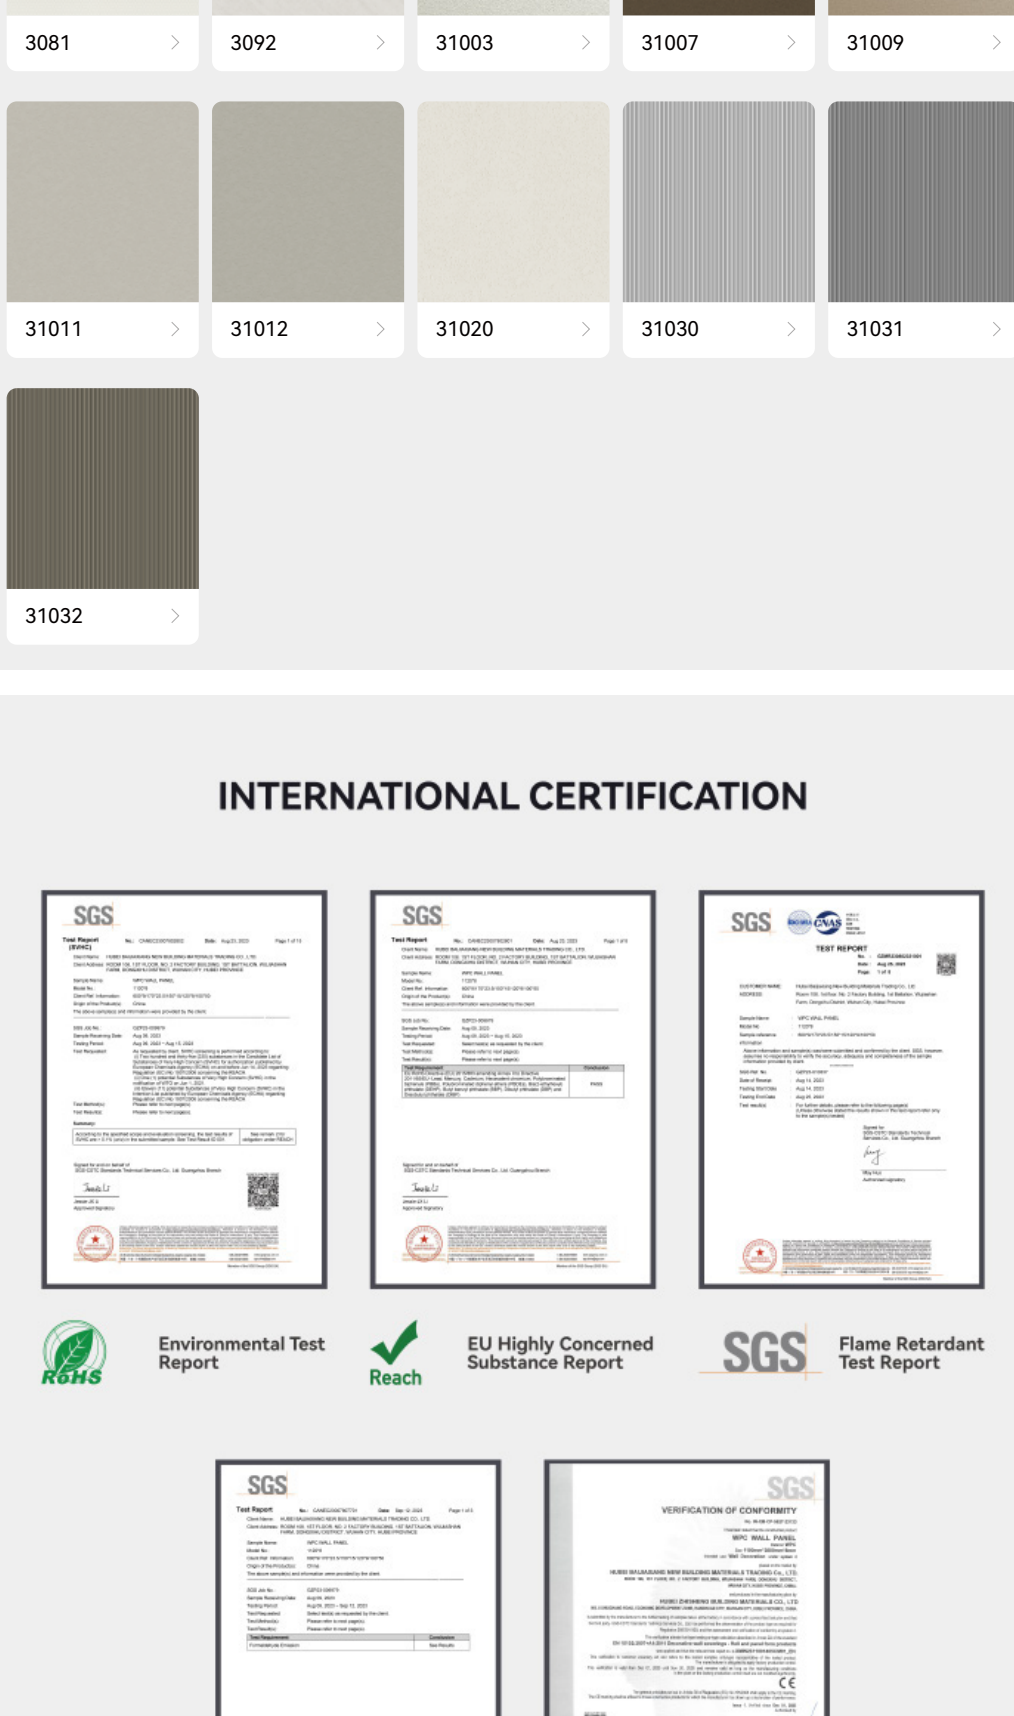

INTERNATIONAL CERTIFICATION



FACTORY STRENGTH

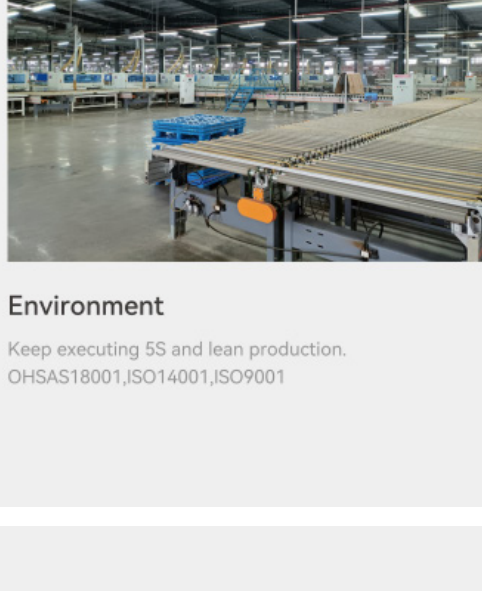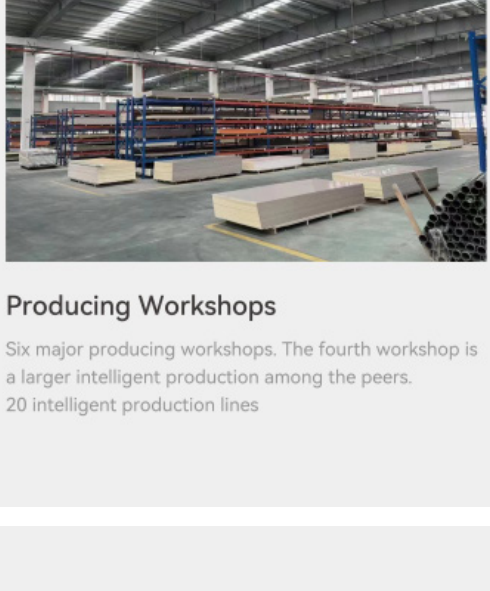

Mature Technology

- 1.Standardized, automated technology design
- 2.Real-time monitoring
- 3.PLC online control
- 4.60 analysis

Equipment Operation

- 1.Famous brands,professional maintenance
- 2.Cutting,edge banding and other links have realized one -stop automatic production and real-time monitoring



Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines

Environment

Keep executing 5S and lean production.

OHSAS18001,ISO14001,ISO9001

PACKING METHOD

