

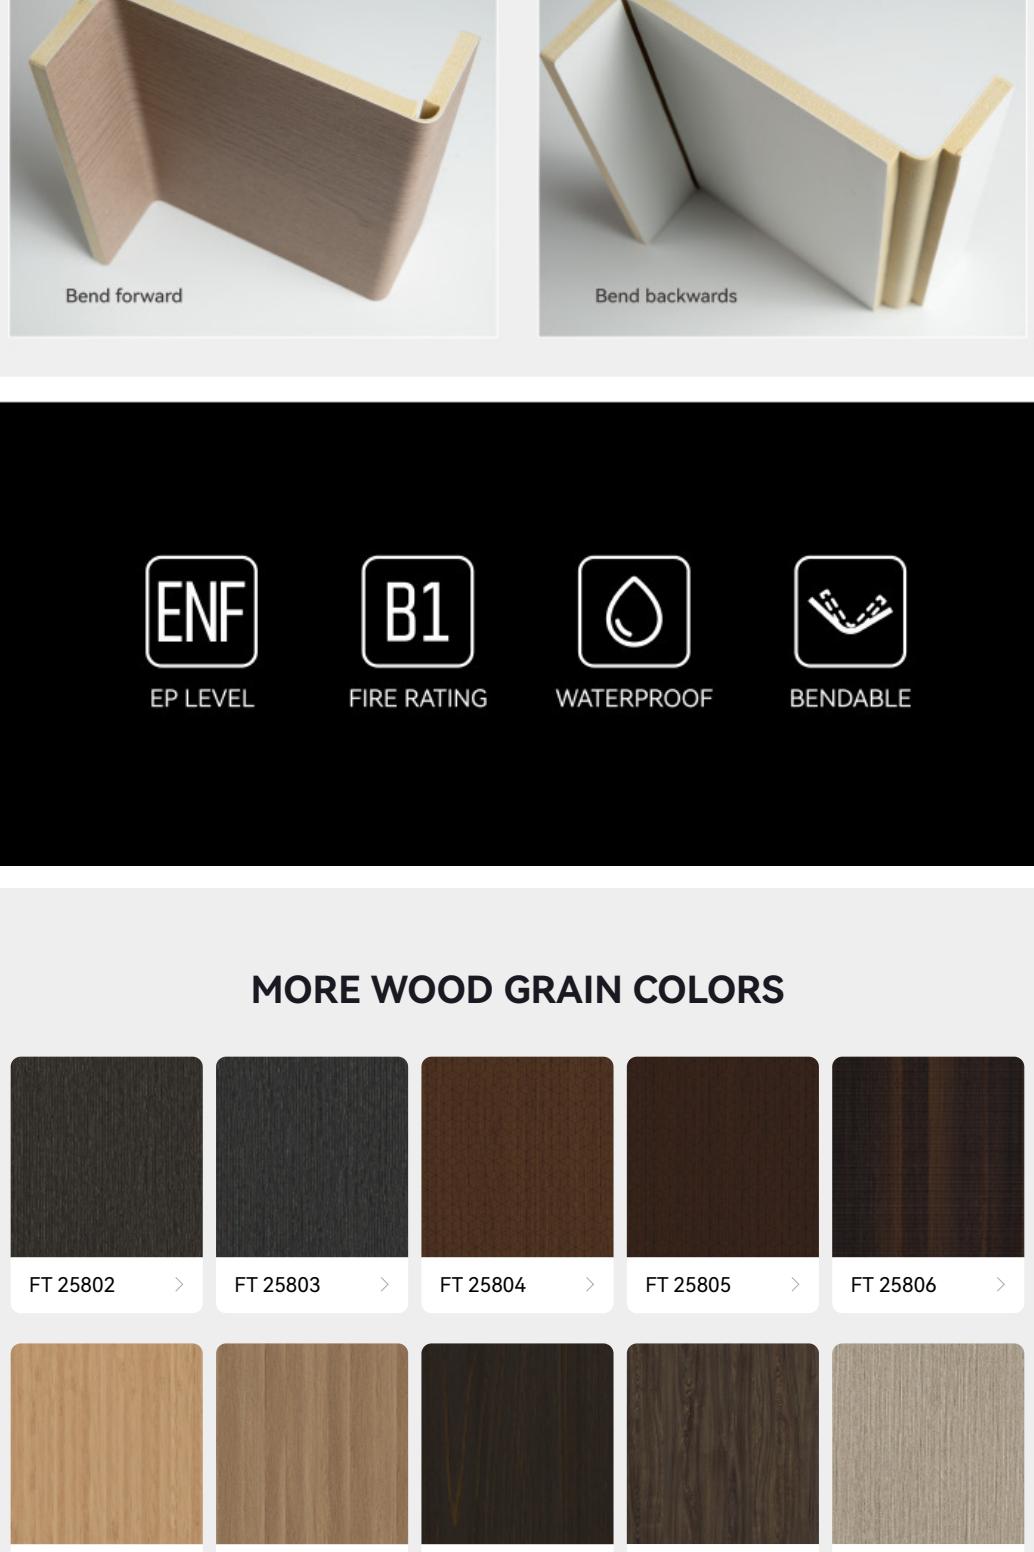


- WOOD GRAIN -

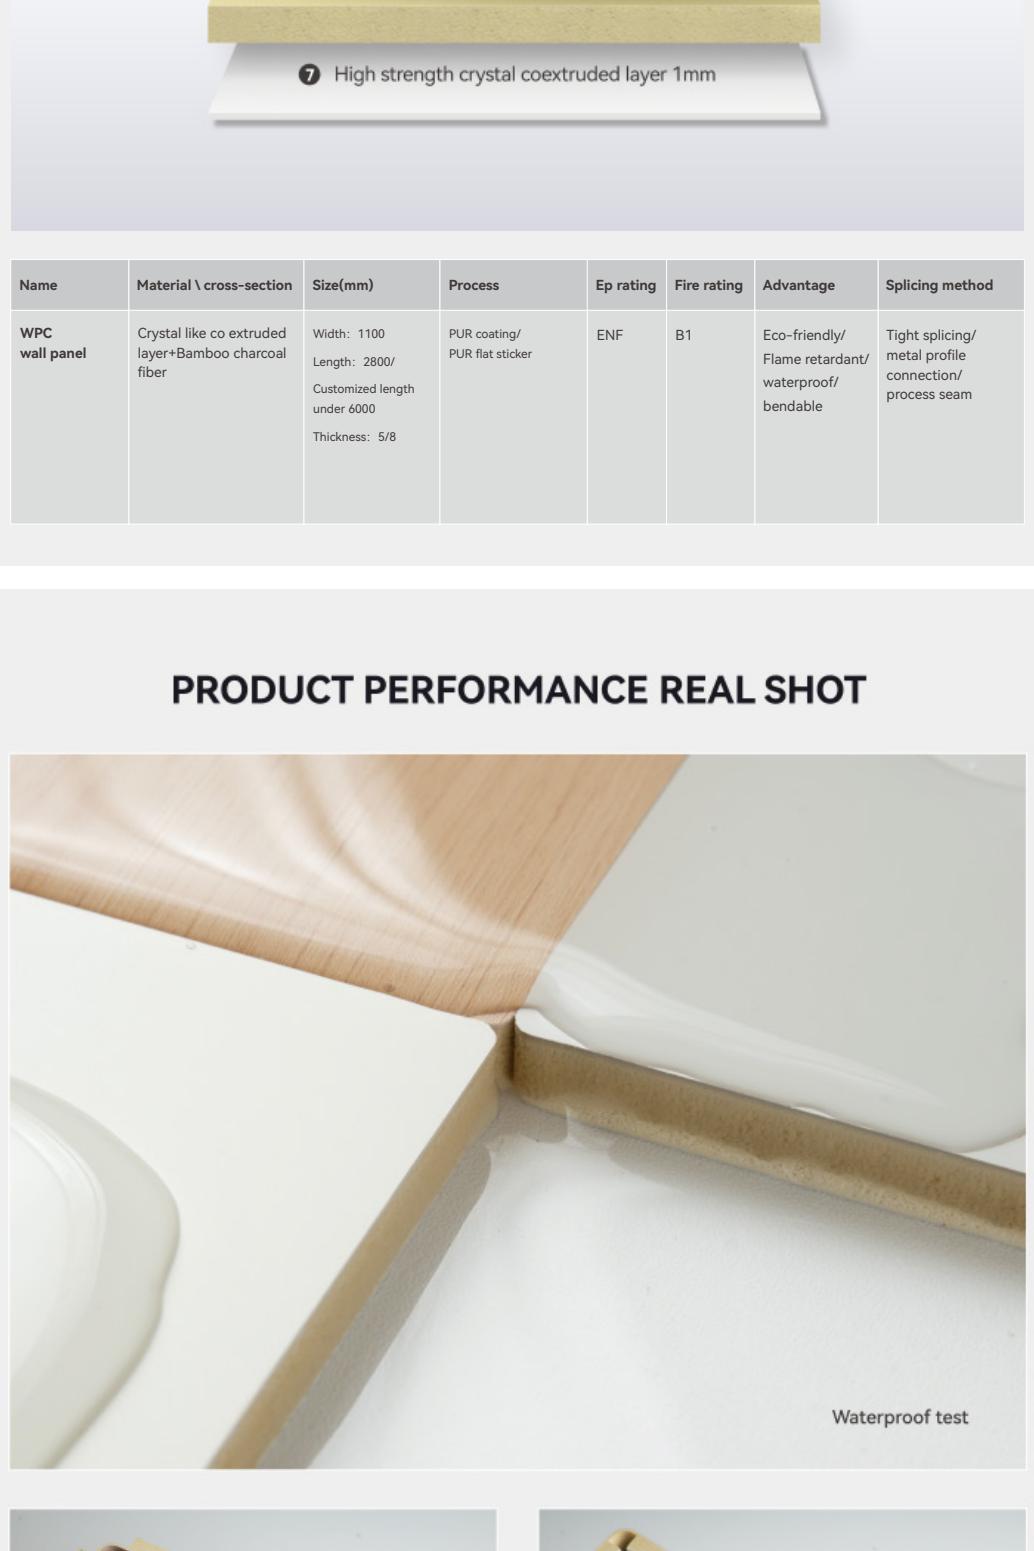


8085

COLOR NUMBER

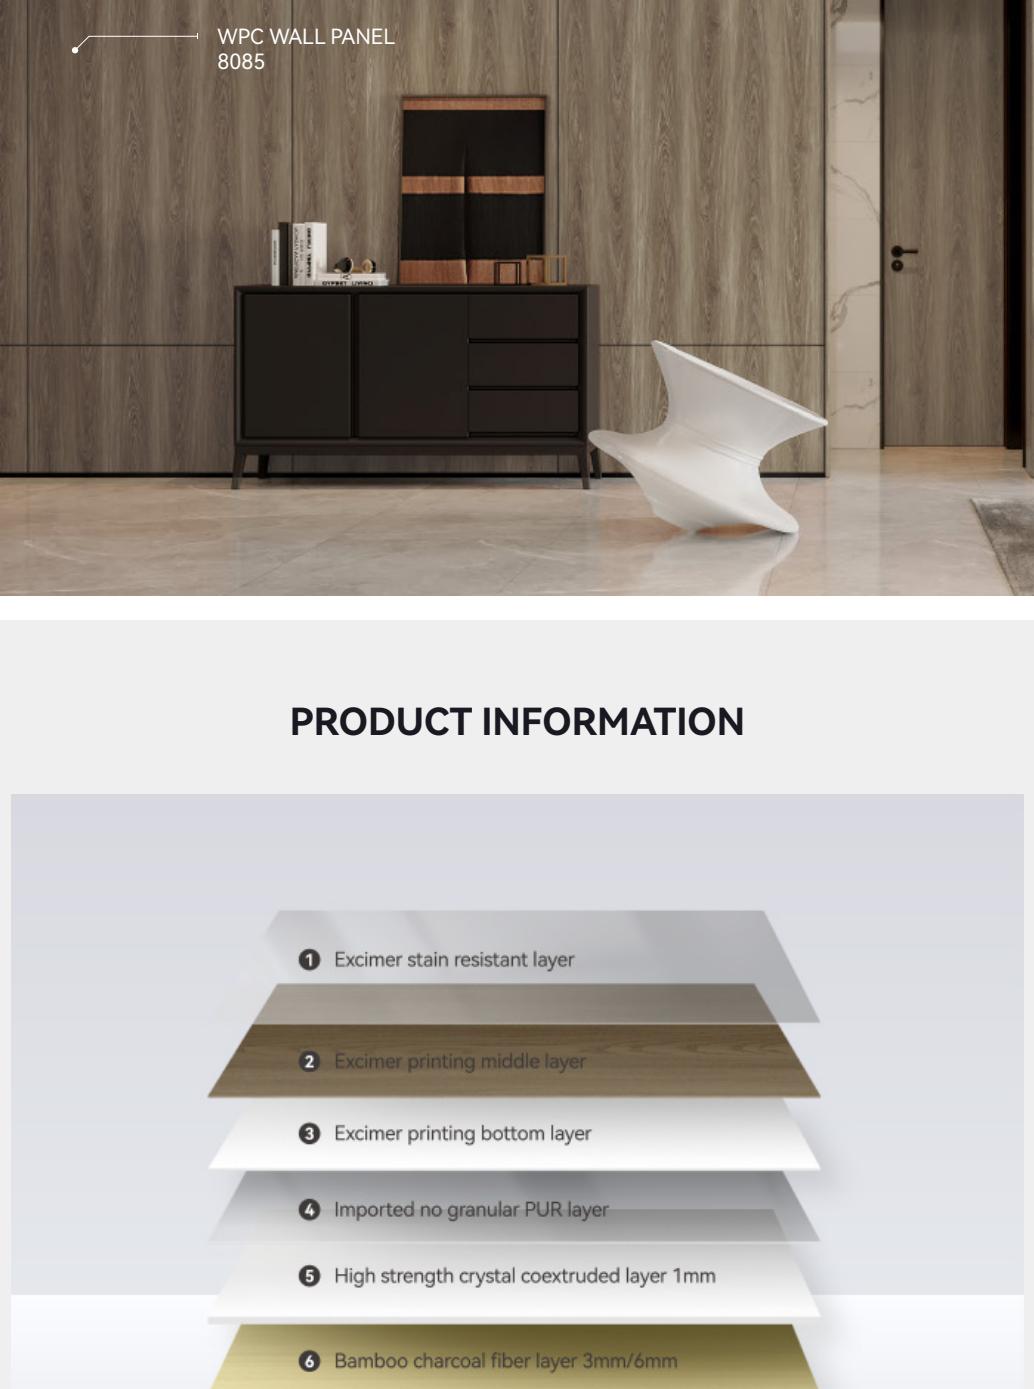


PRODUCT INFORMATION

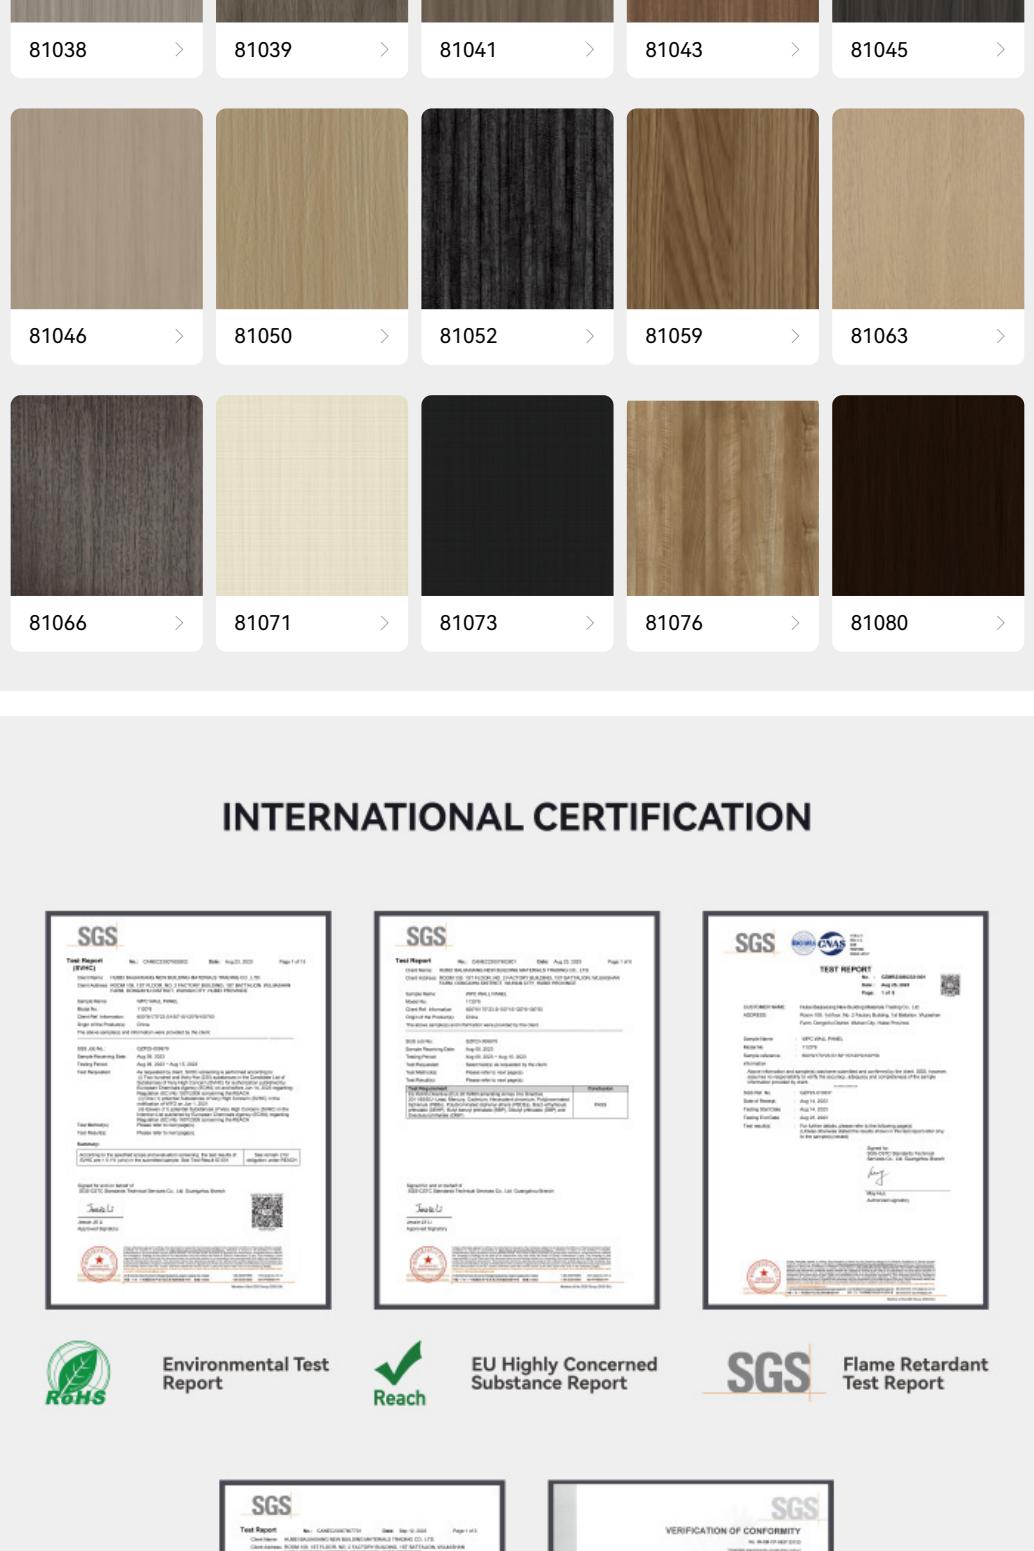


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile/ process seam

PRODUCT PERFORMANCE REAL SHOT

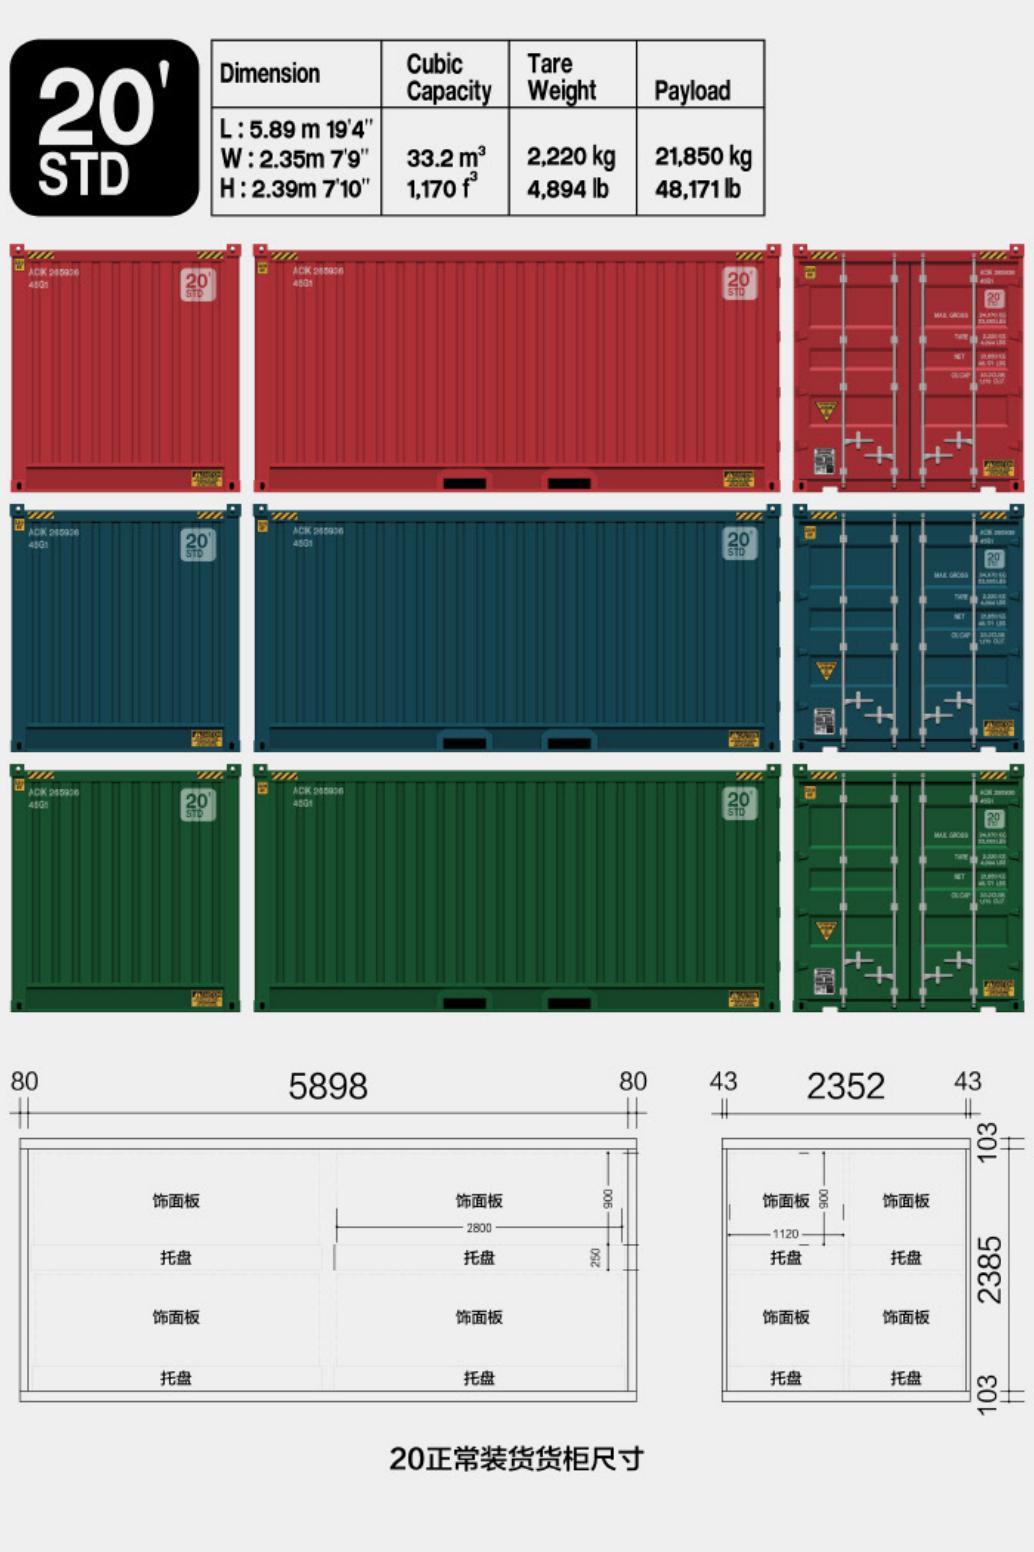

FACTORY STRENGTH

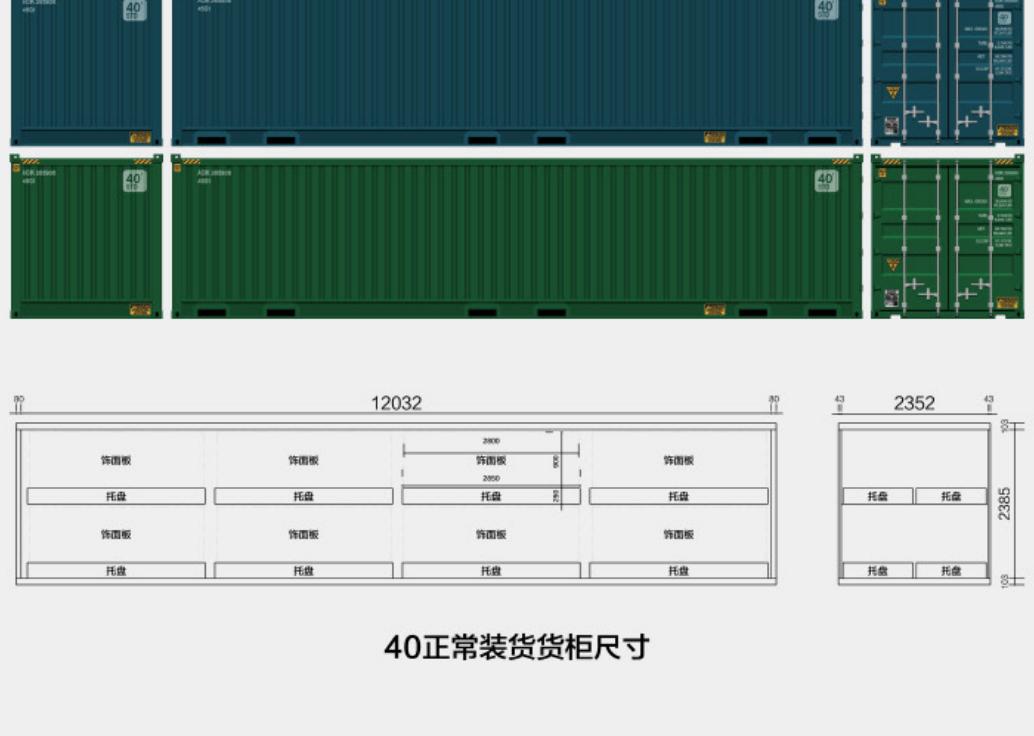

PACKING METHOD

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 5.89 m 19'4" W: 2.35m 7'9" H: 2.39m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

20'正常装货柜尺寸

80	5898	80	43	2352	43	2385
饰面板 托盘						

20'正常装货柜尺寸

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.05m 39'4" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m ³ 2,391 f ³	2,740 kg 6,096 lb	26,760 kg 58,996 lb

40'正常装货柜尺寸