
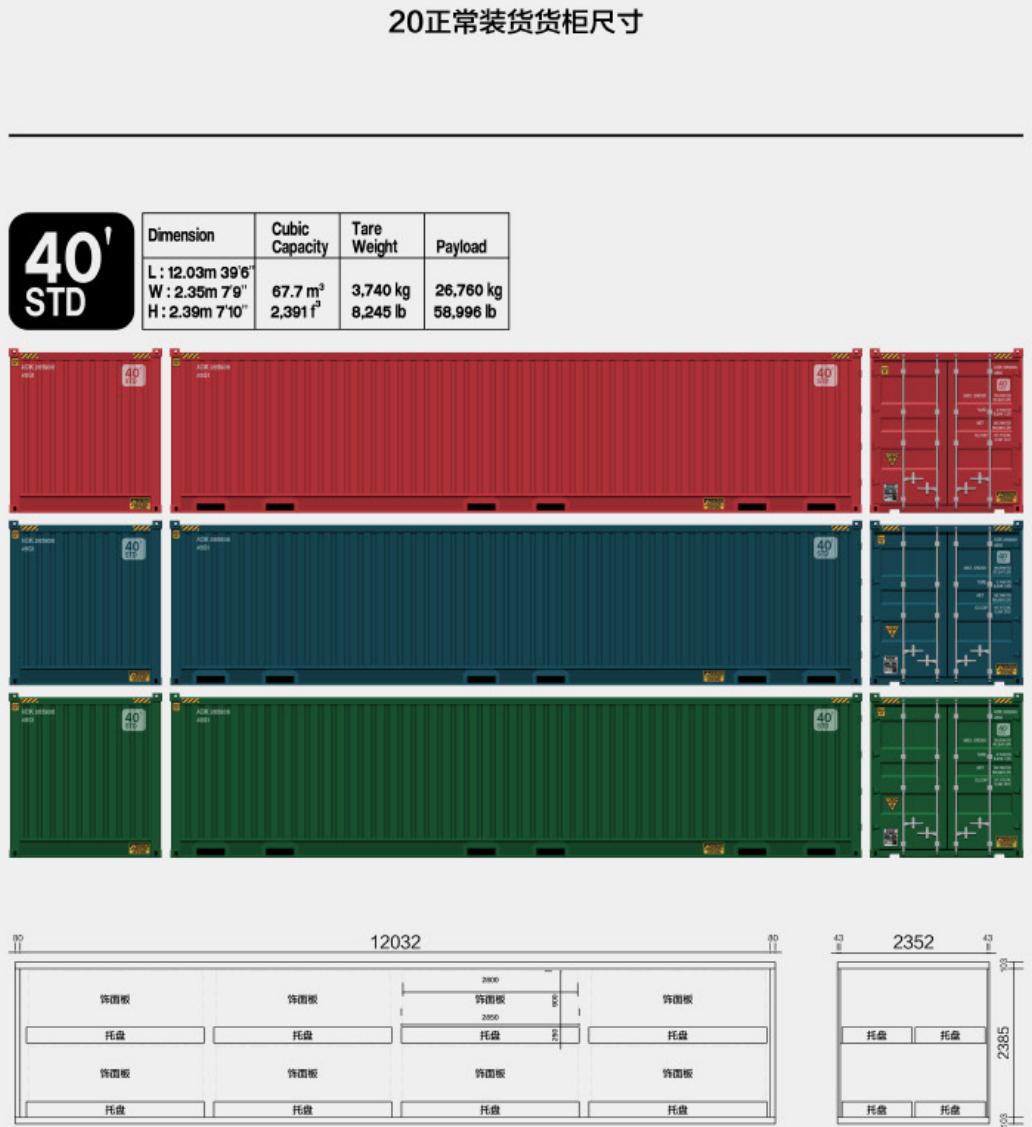
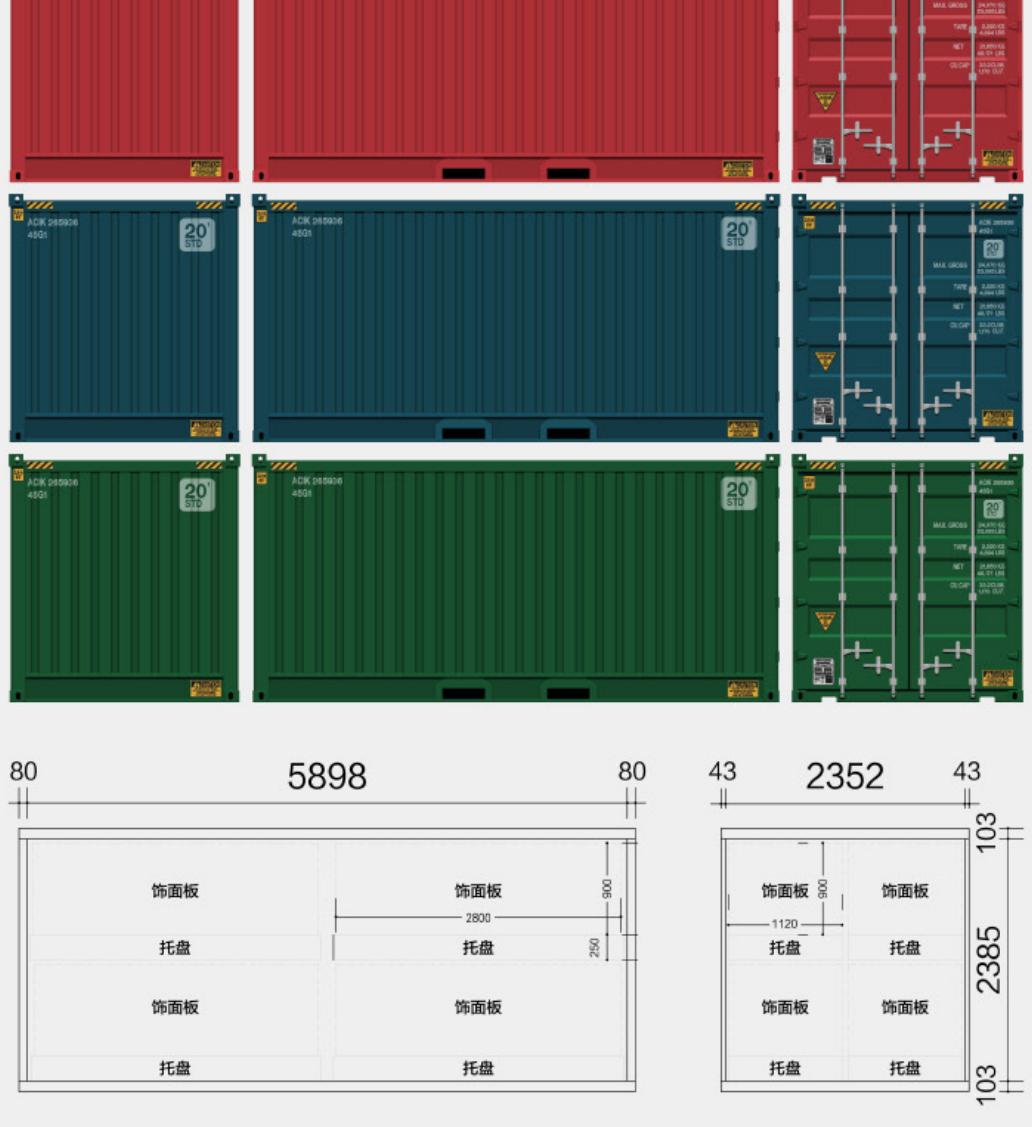
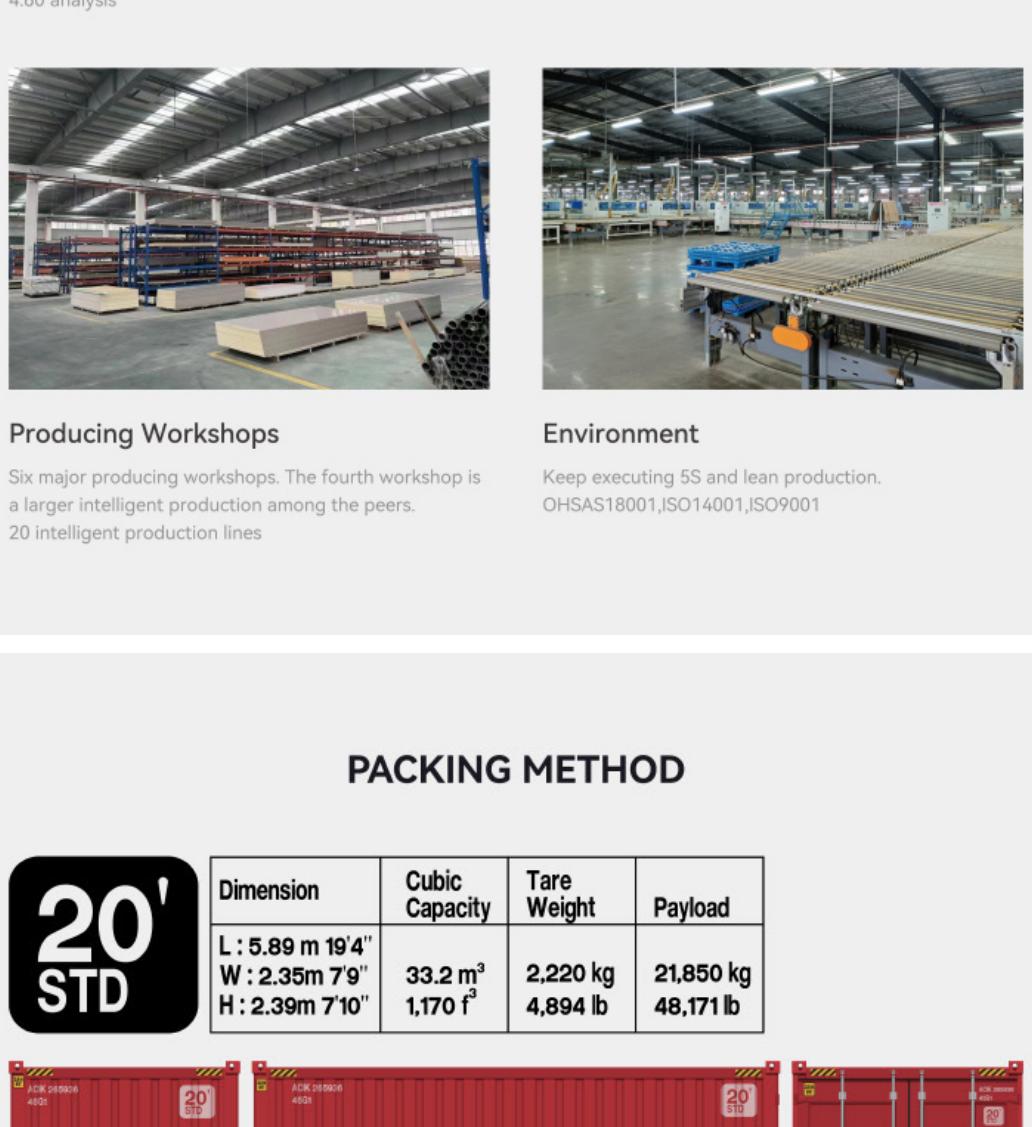
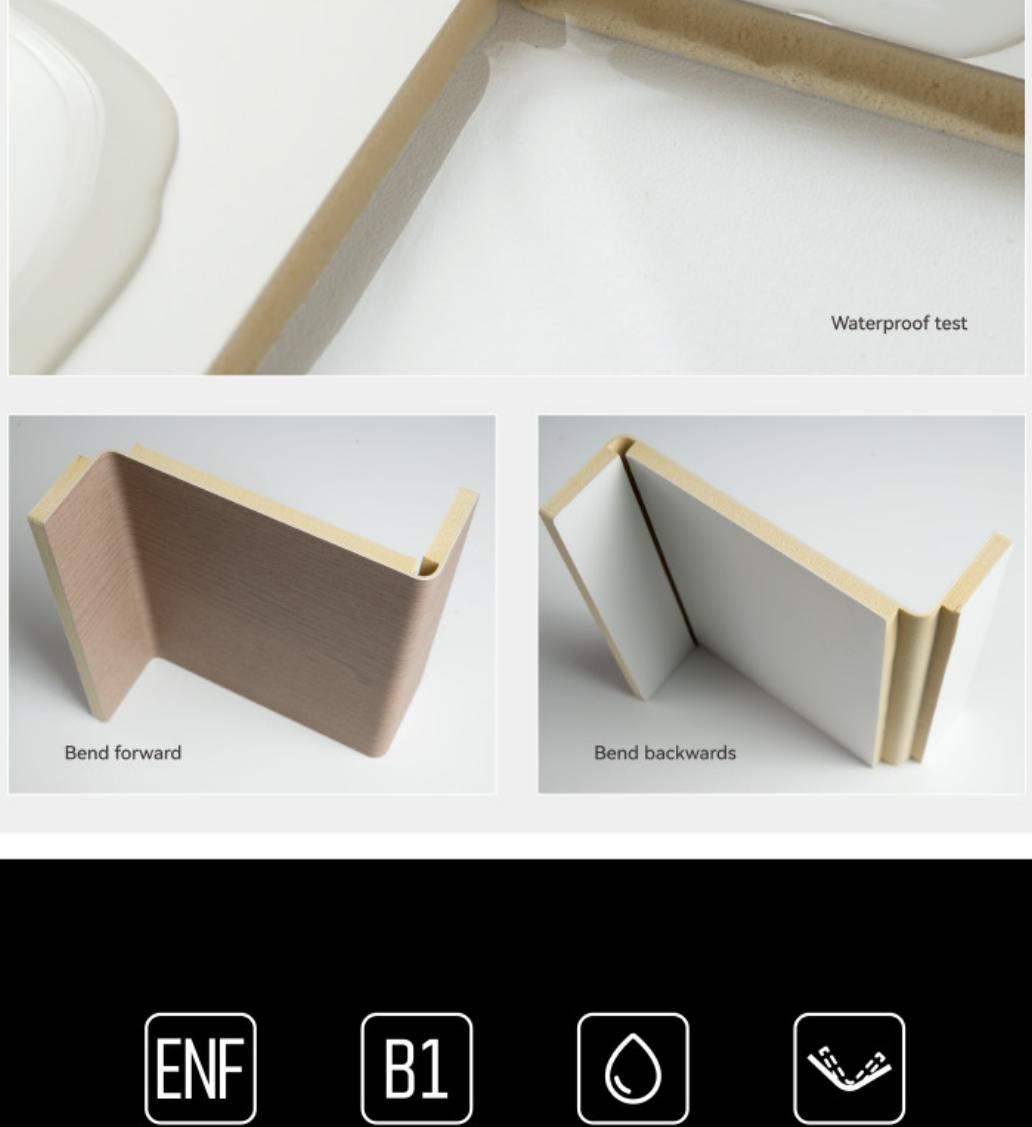
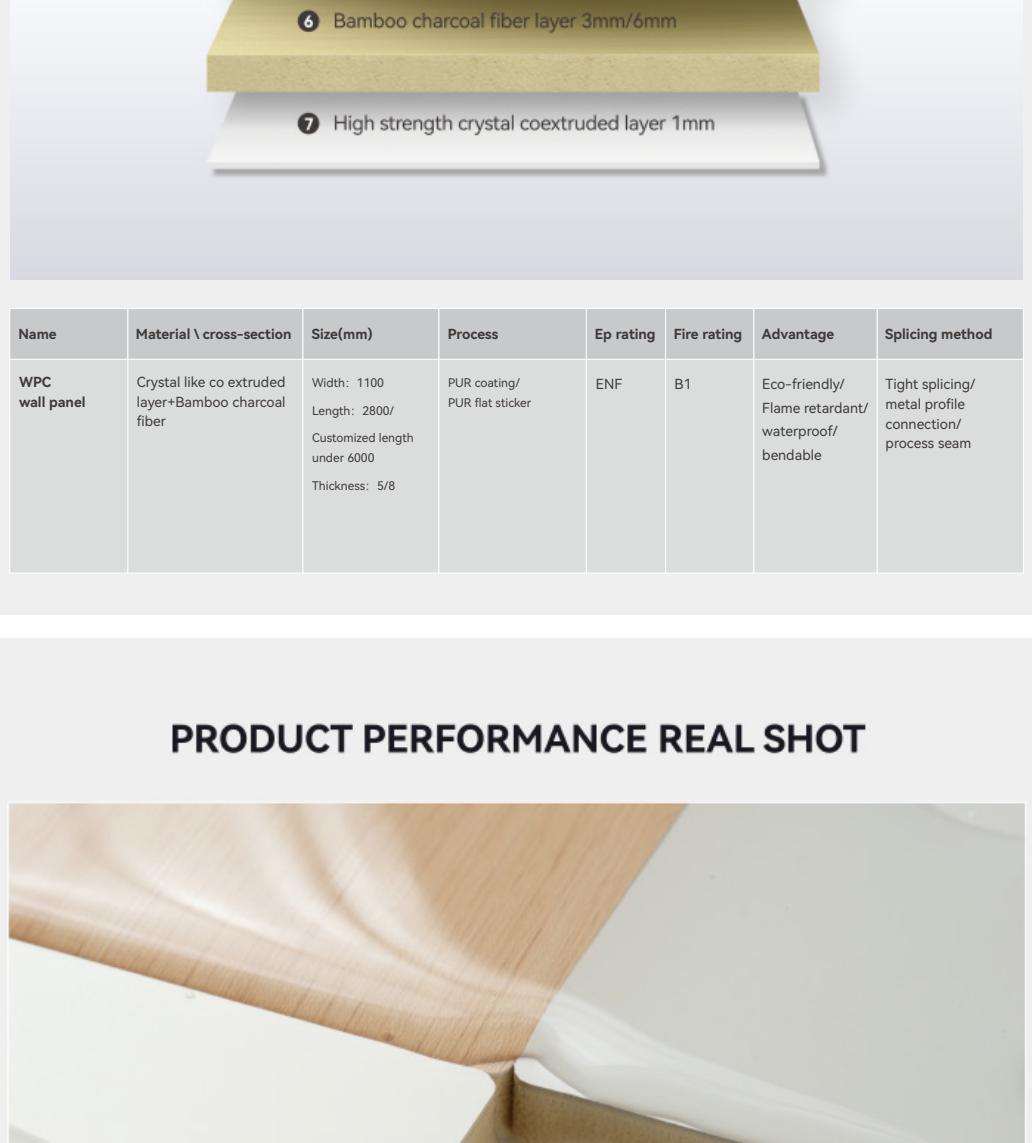


- WOOD GRAIN -

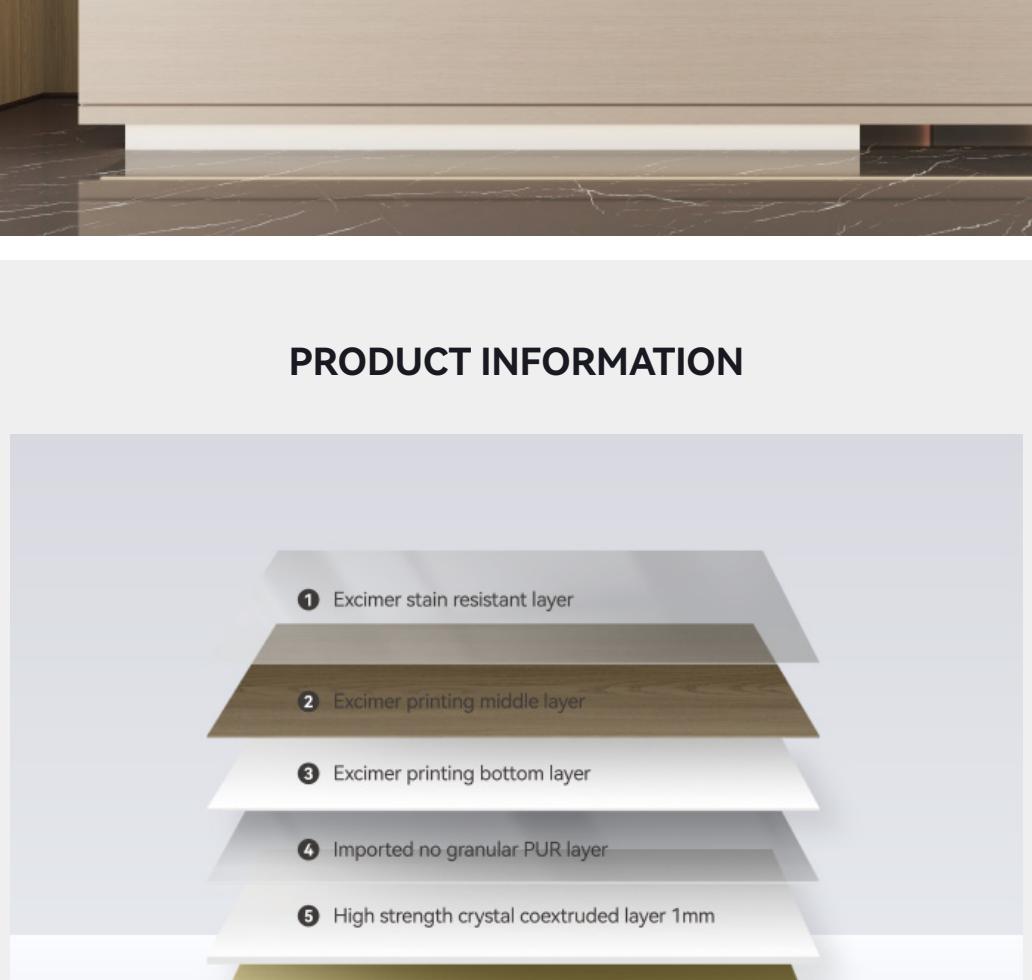

PRODUCT INFORMATION

① Excimer stain resistant layer

② Excimer printing middle layer

③ Excimer printing bottom layer

④ Imported no granular PUR layer

⑤ High strength crystal coextruded layer 1mm

⑥ Bamboo charcoal fiber layer 3mm/6mm

⑦ High strength crystal coextruded layer 1mm

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile/ process seam

PRODUCT PERFORMANCE REAL SHOT

MORE WOOD GRAIN COLORS

FACTORY STRENGTH

Mature Technology
1.Standardized, automated technology design
2.Real-time monitoring
3.PLC online control
4.G60 analysis

Equipment Operation
1.Famous brands.professional maintenance
2.Cutting edge banding and other links have realized one-stop automatic production and real-time monitoring

Producing Workshops
Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines

Environment
Keep executing 5S and lean production.
OHAS18001,ISO14001,ISO9001

Environment
Keep executing 5S and