

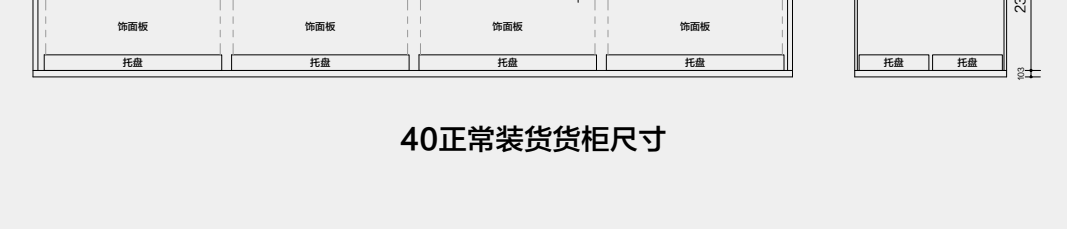
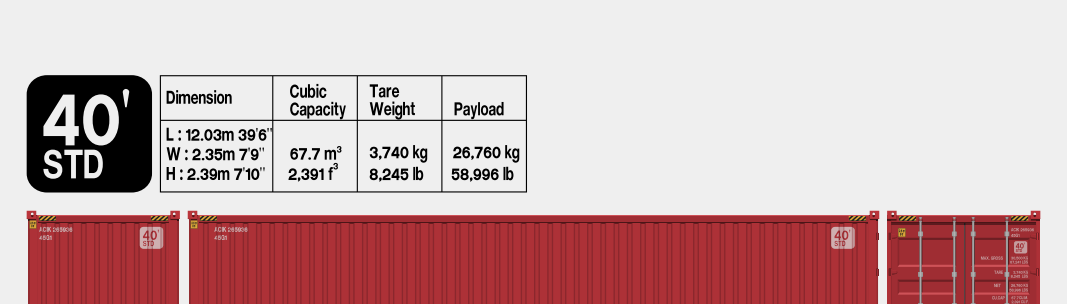
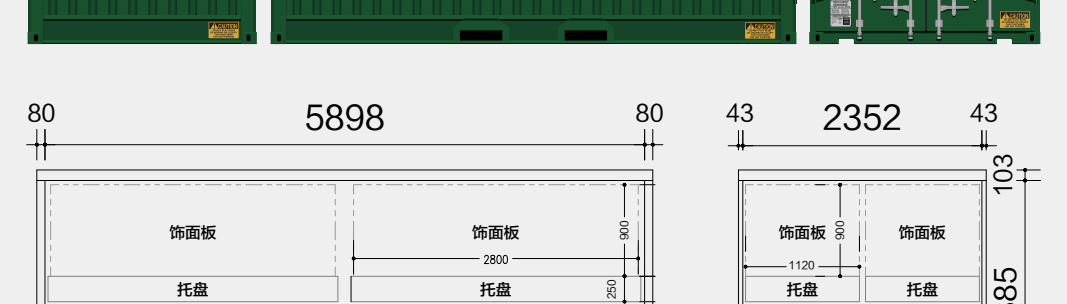
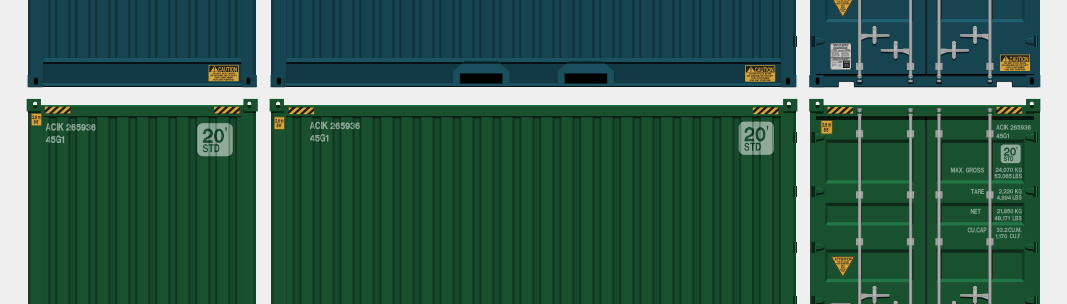
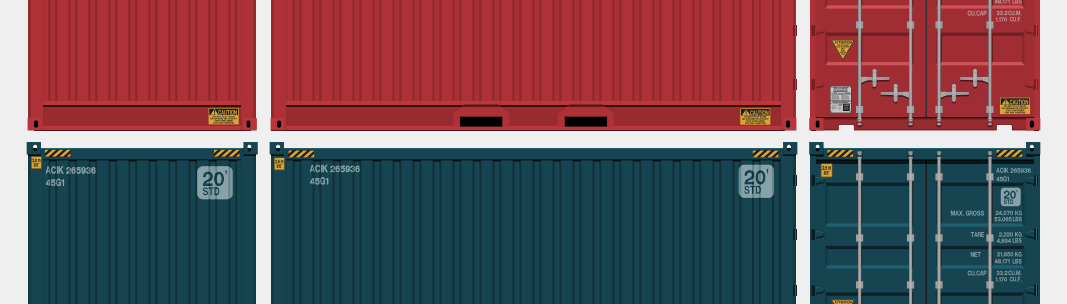
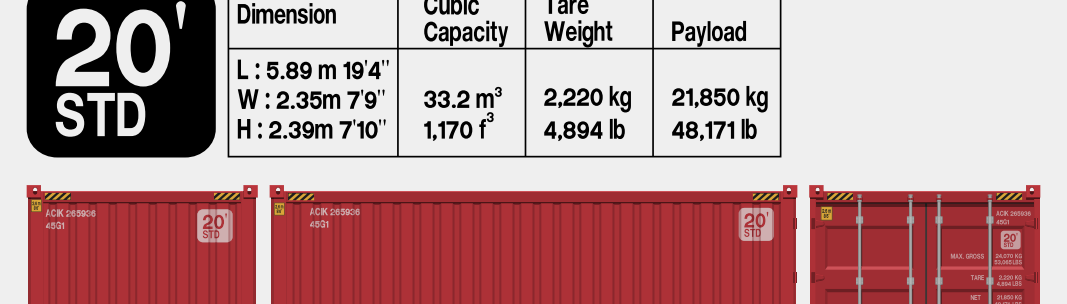
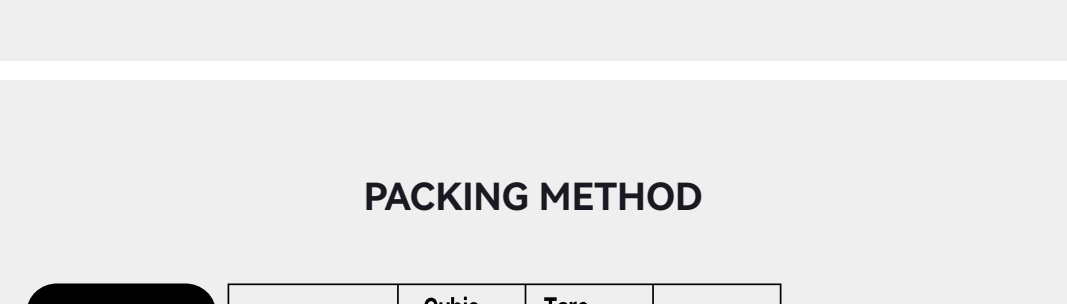
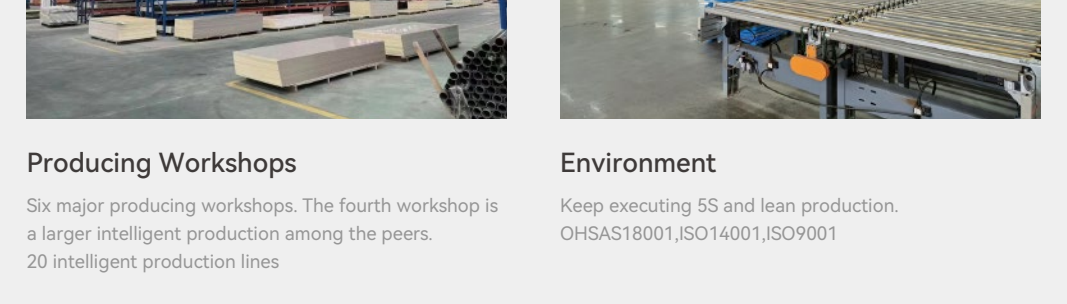
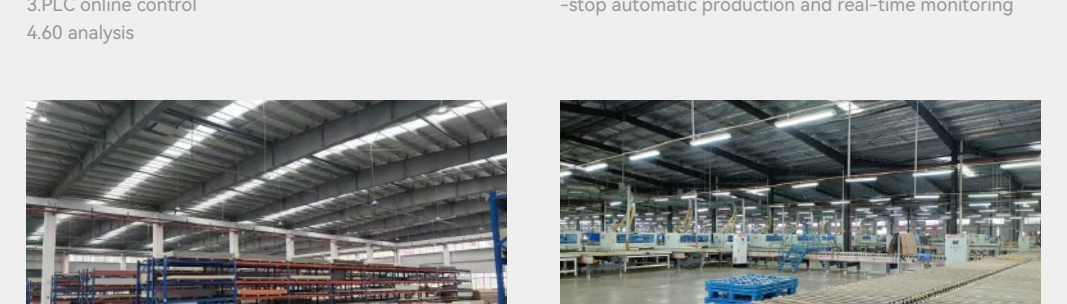
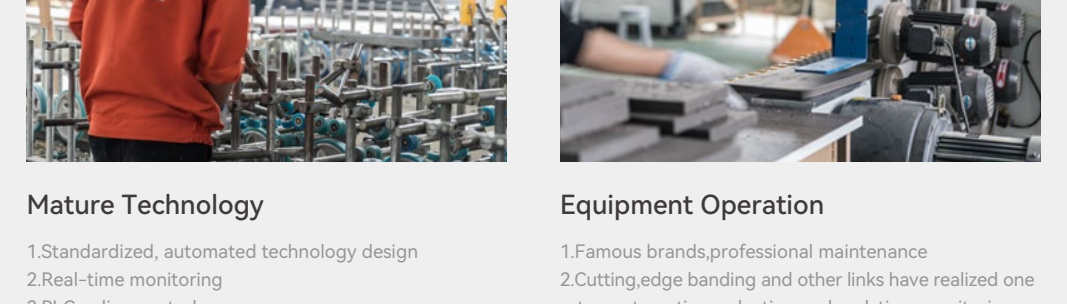
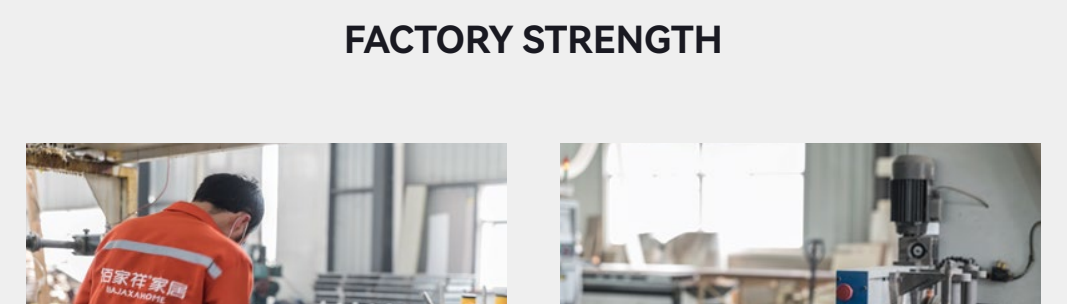
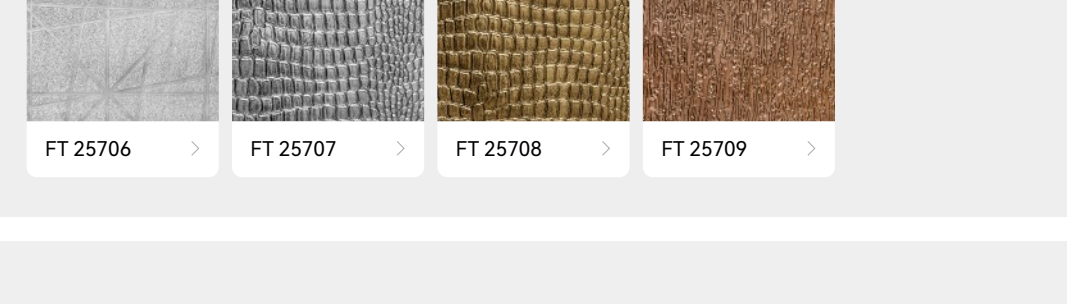
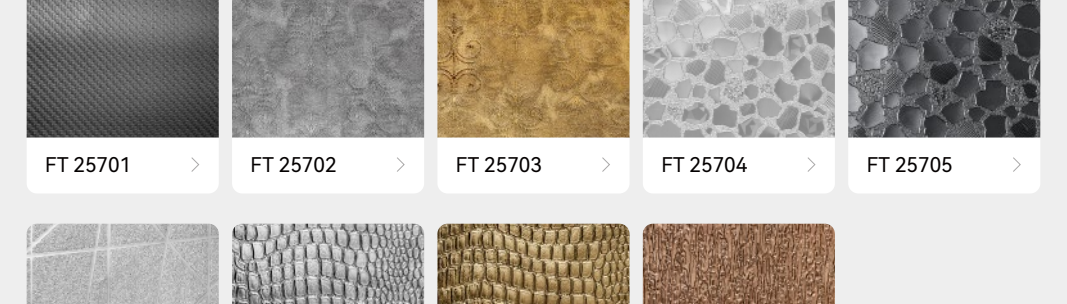
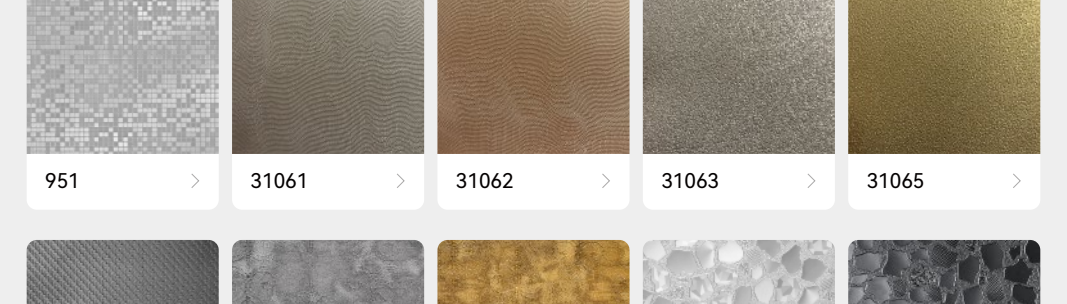
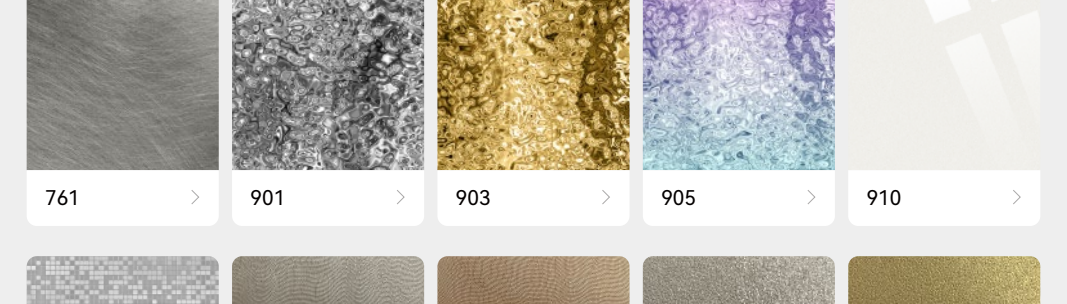
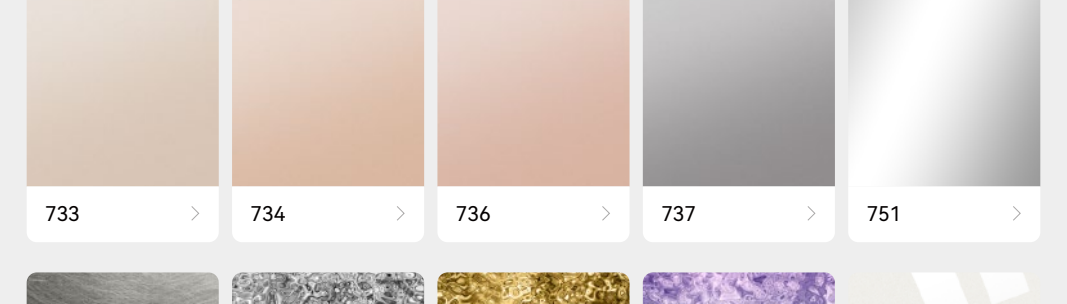
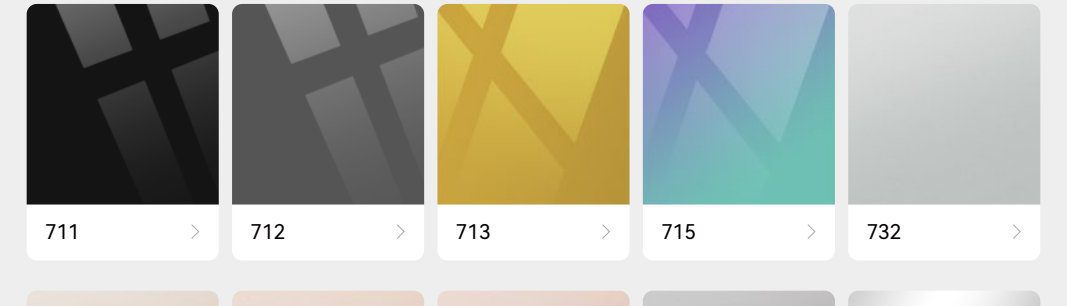
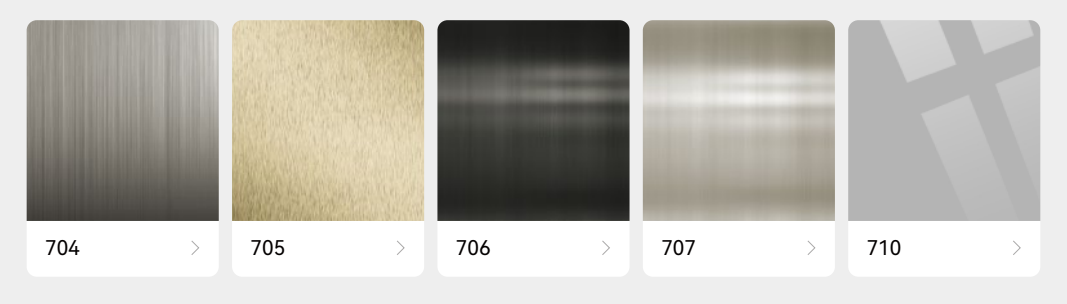
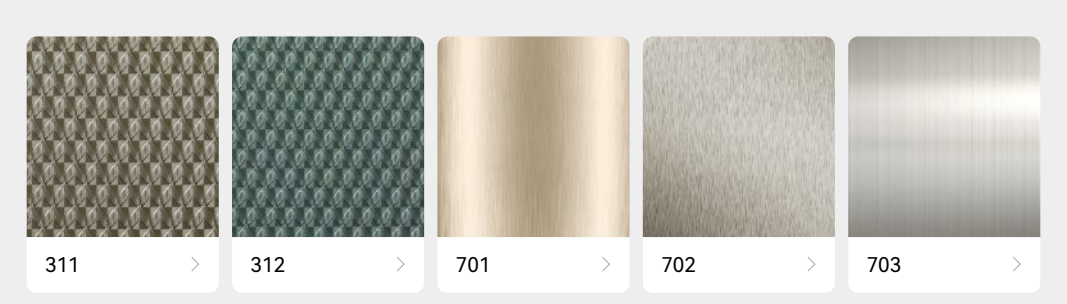
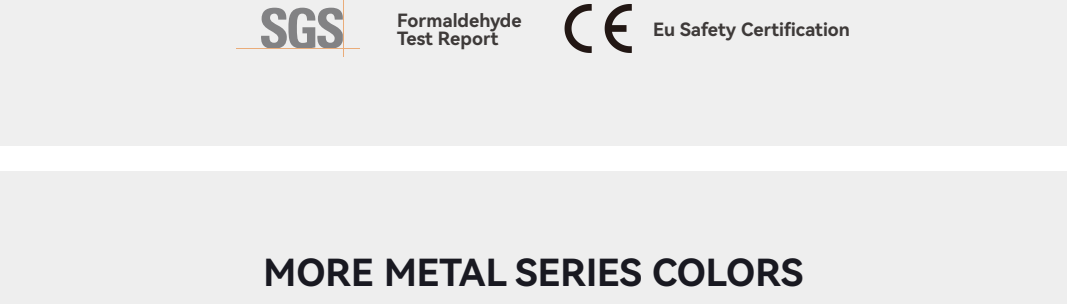
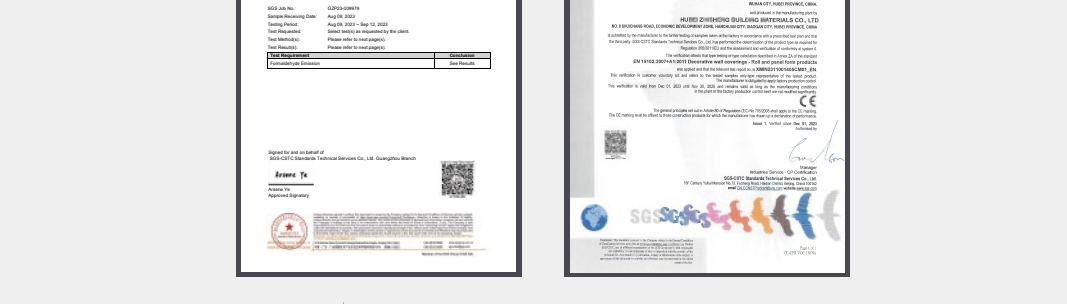
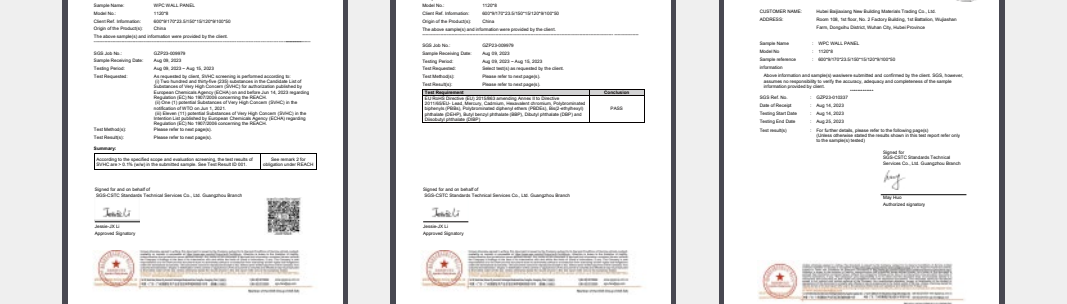
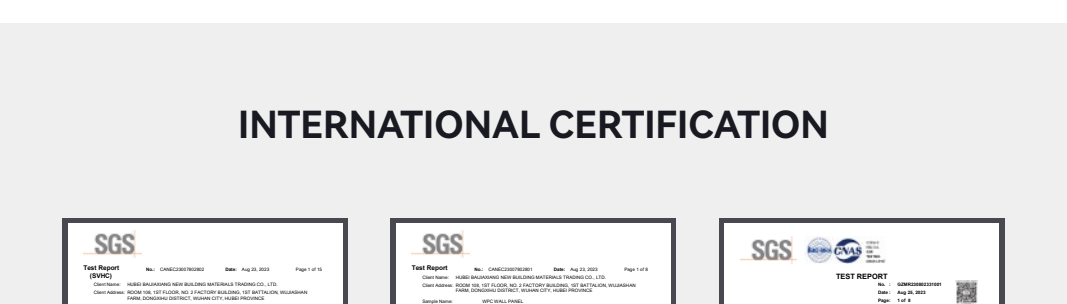
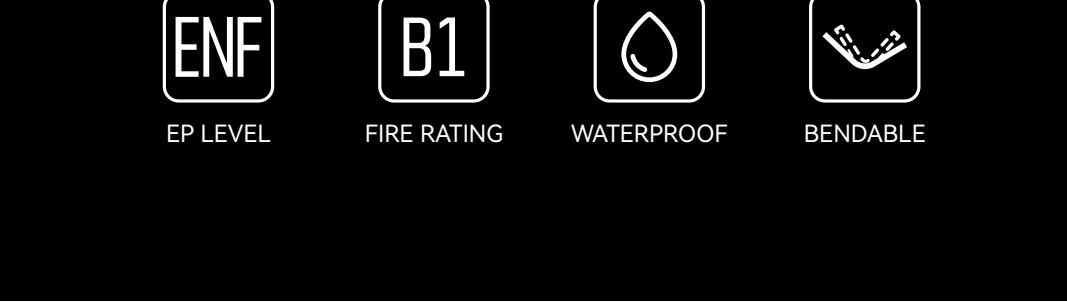
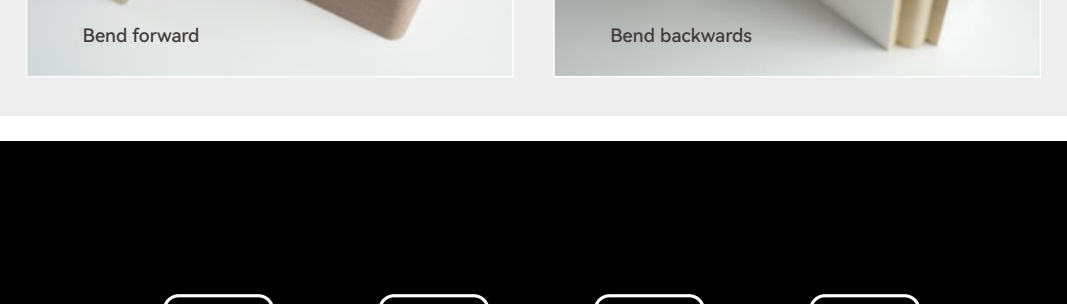
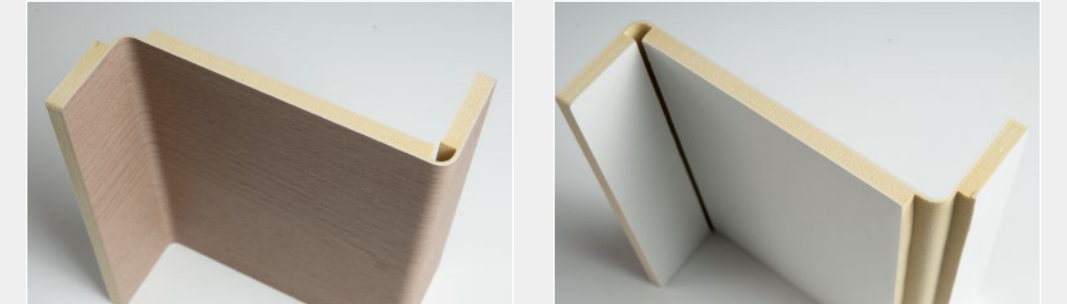
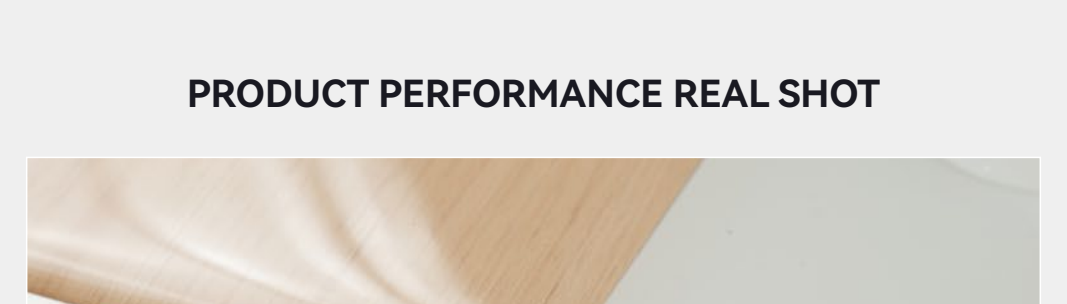
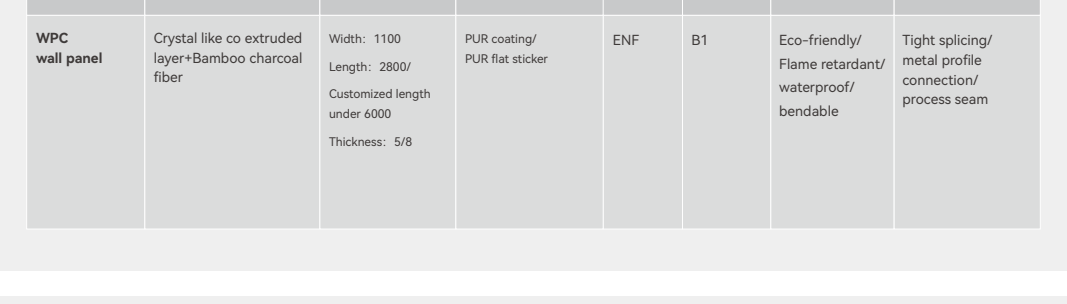


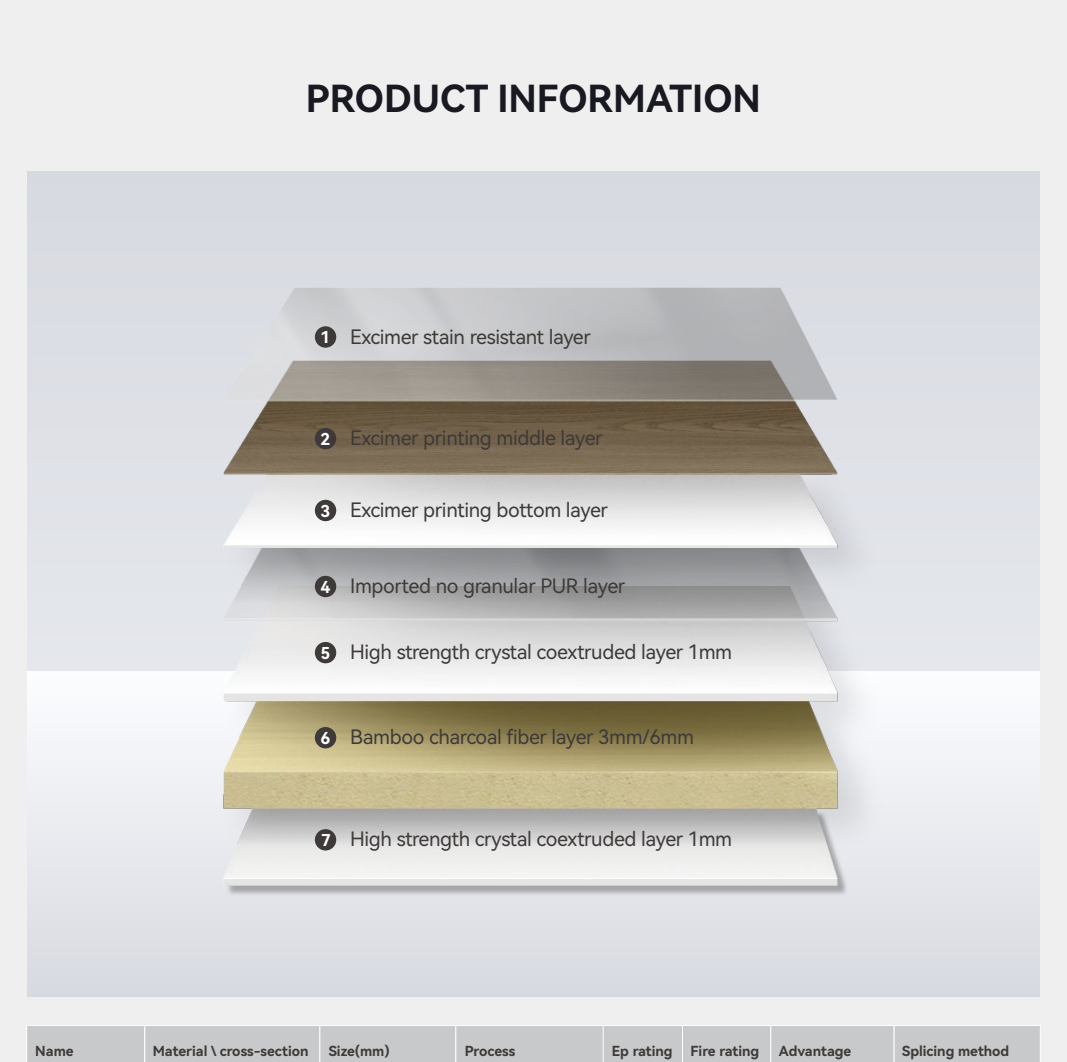

751

PRODUCT SIZE

























Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

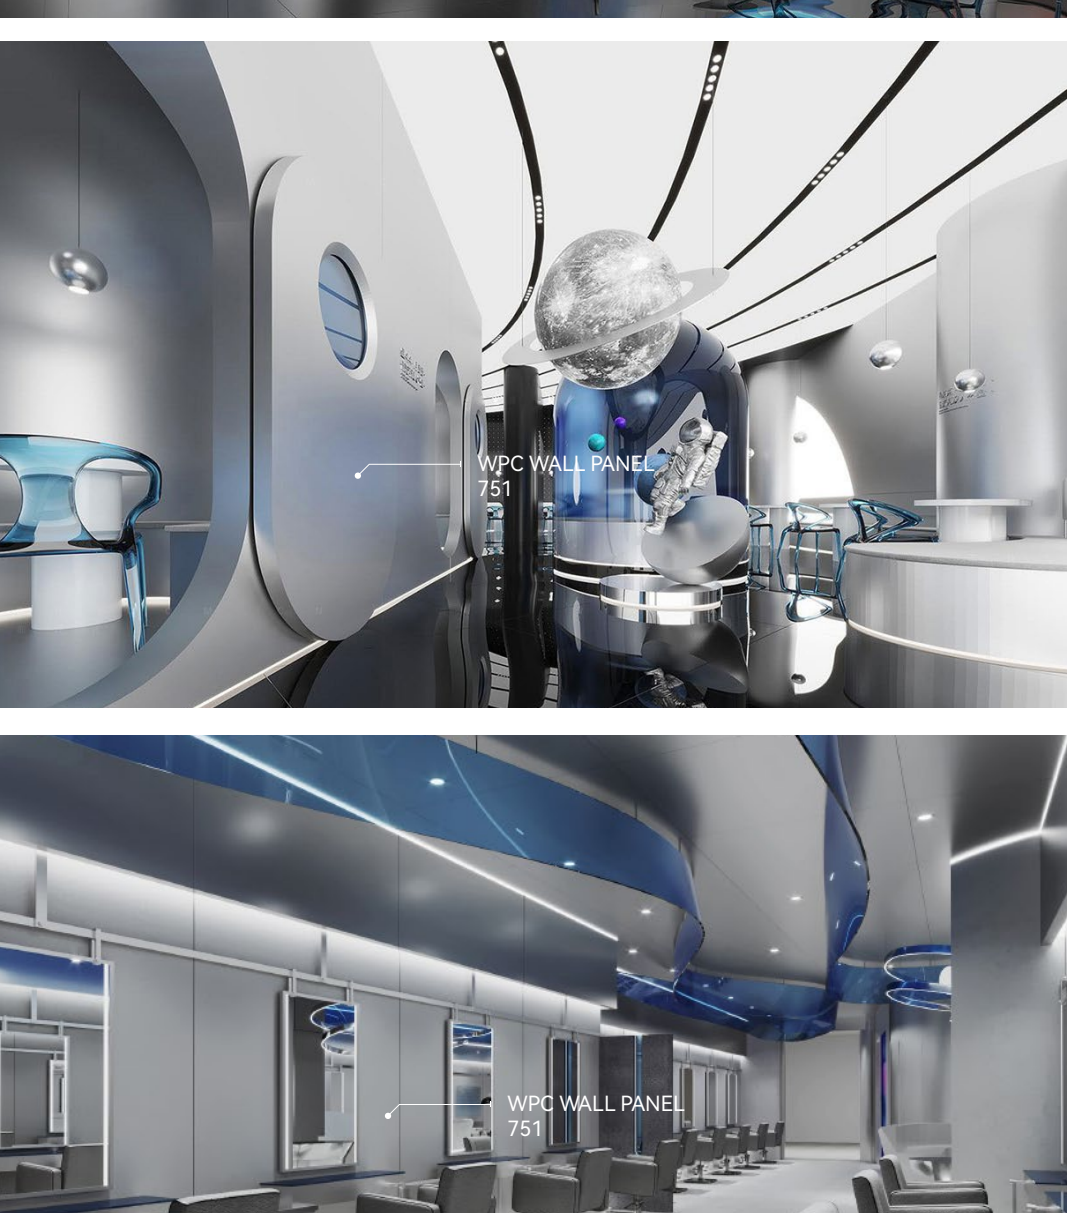

















PRODUCT INFORMATION


















Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

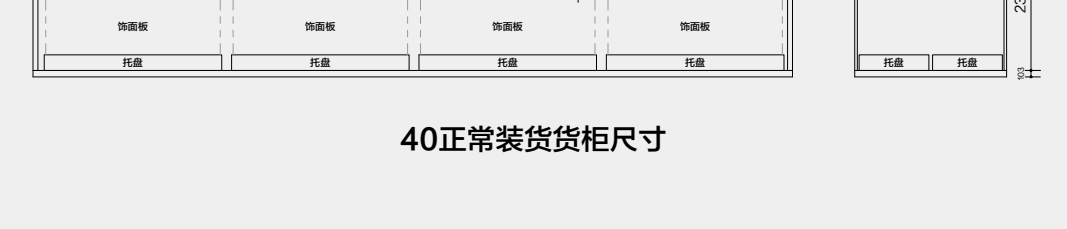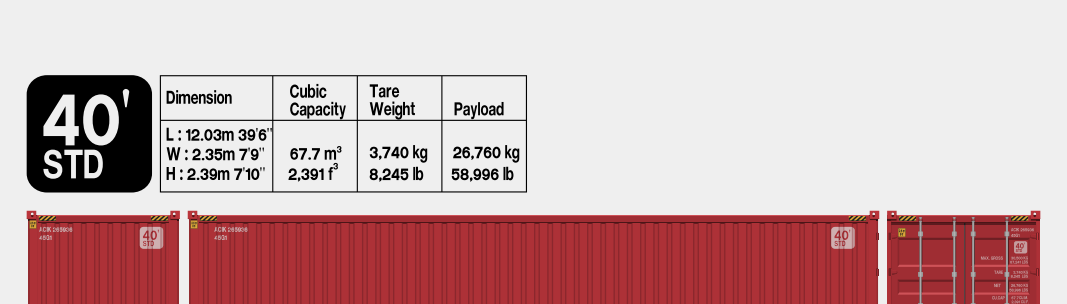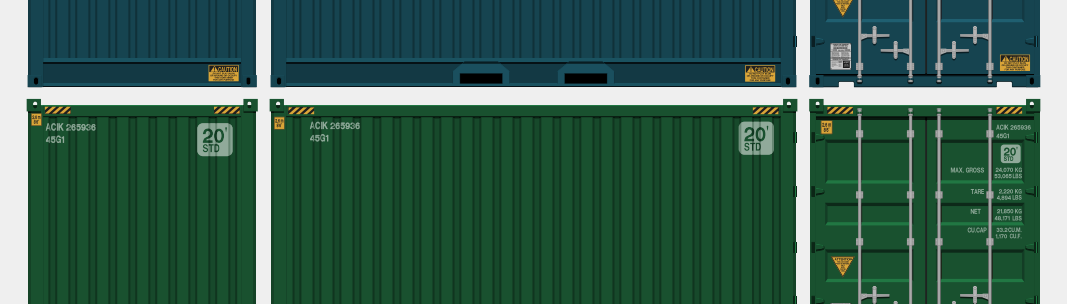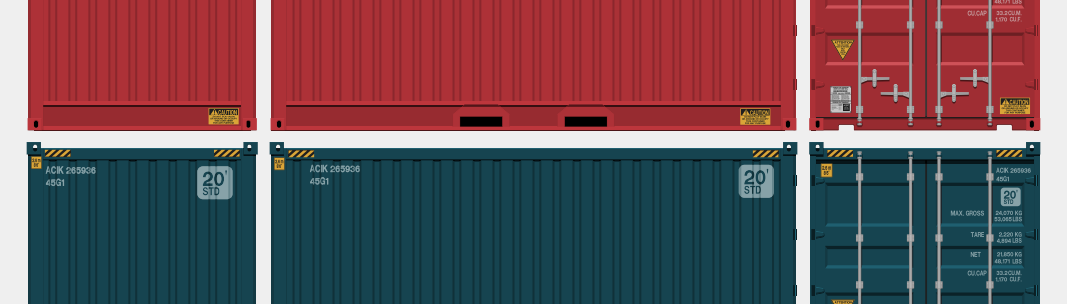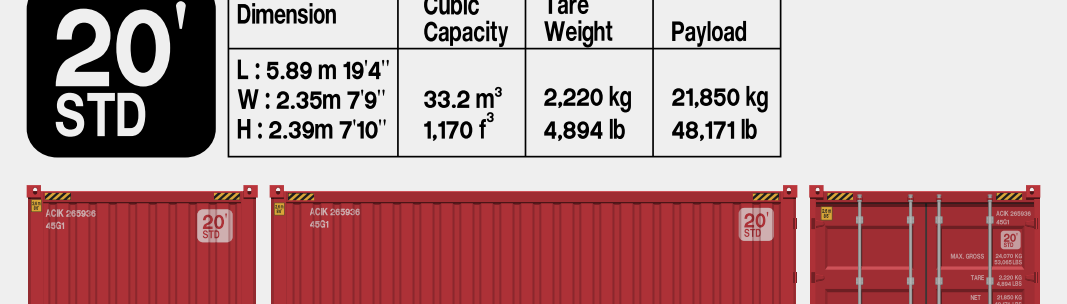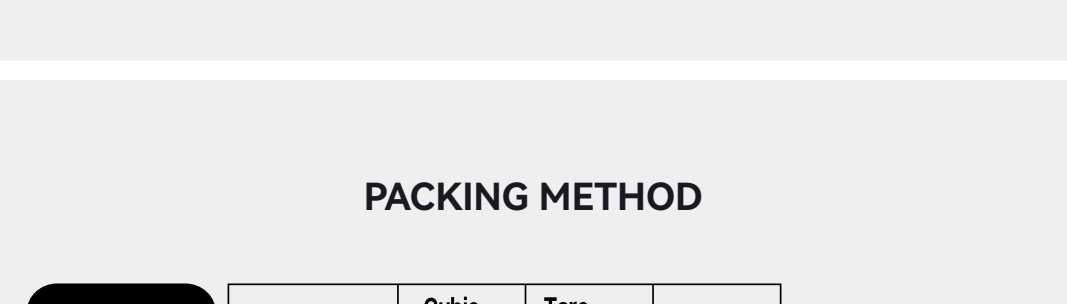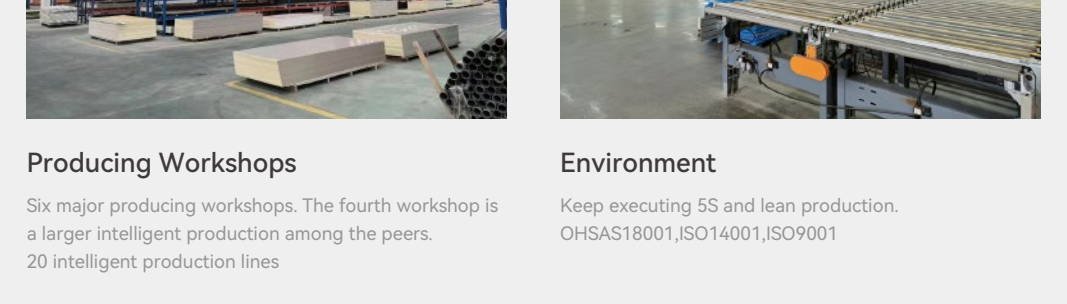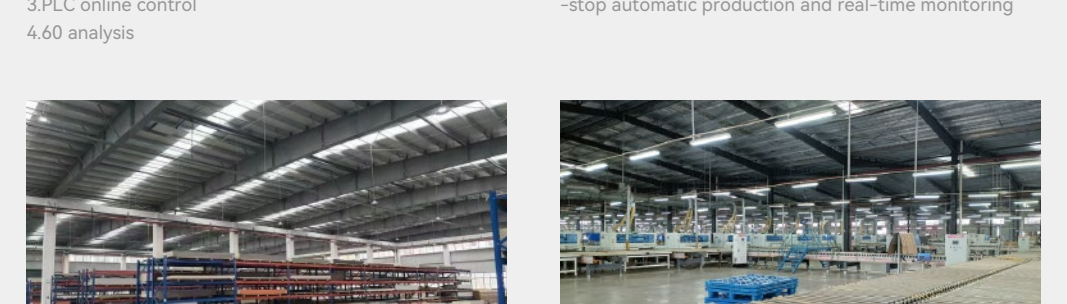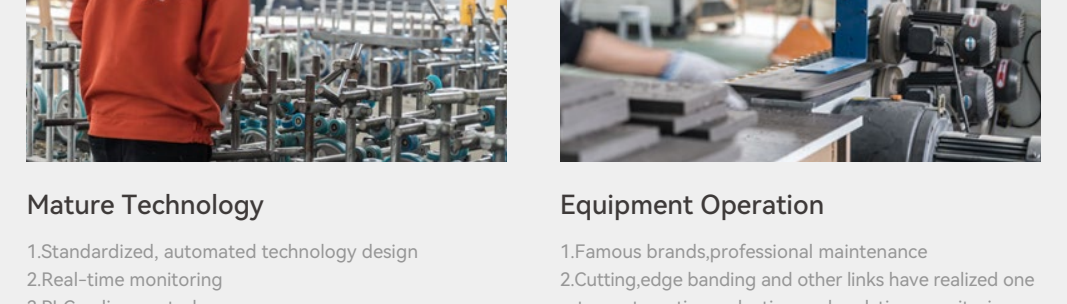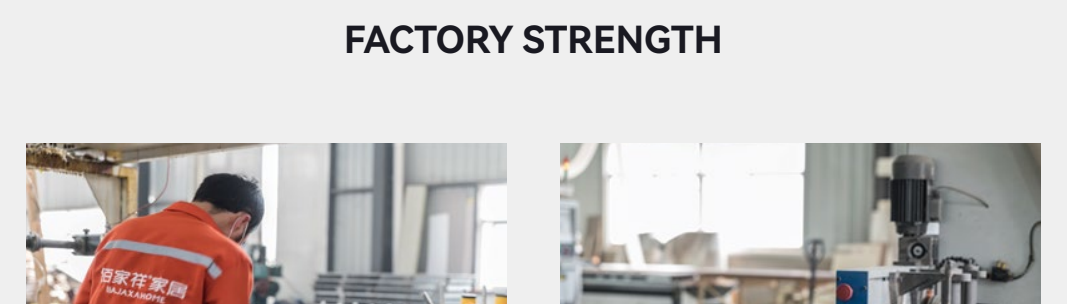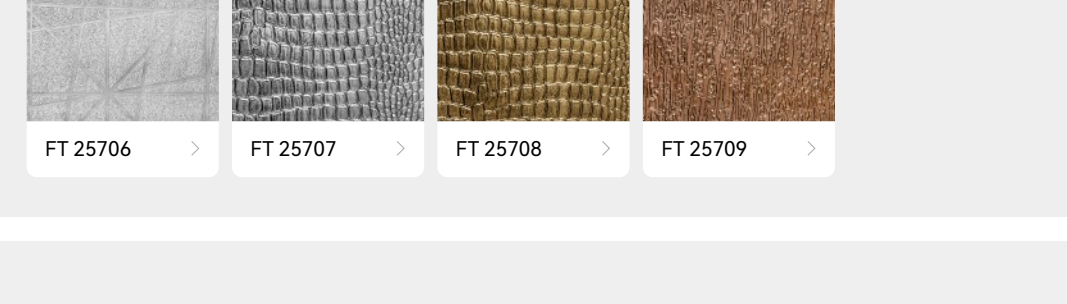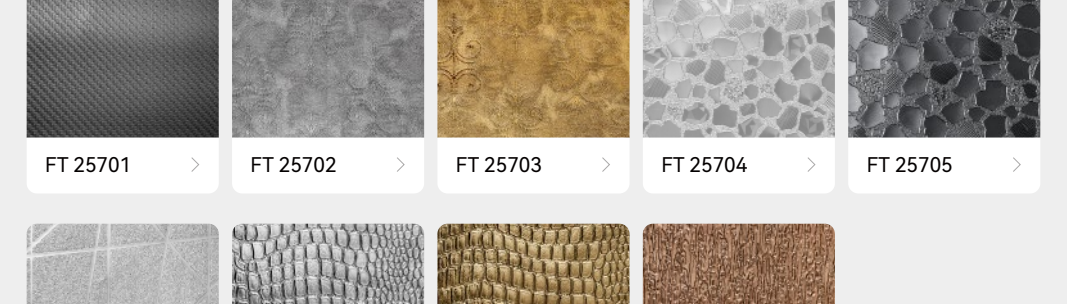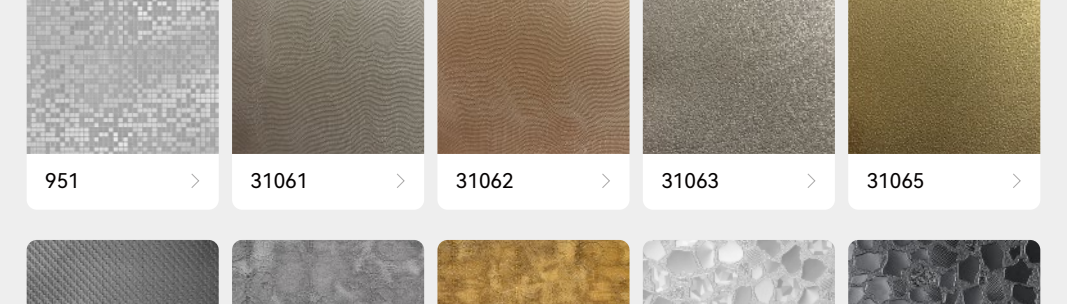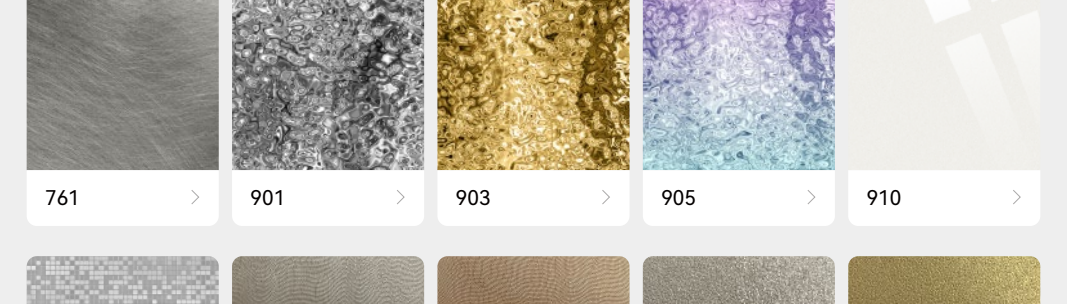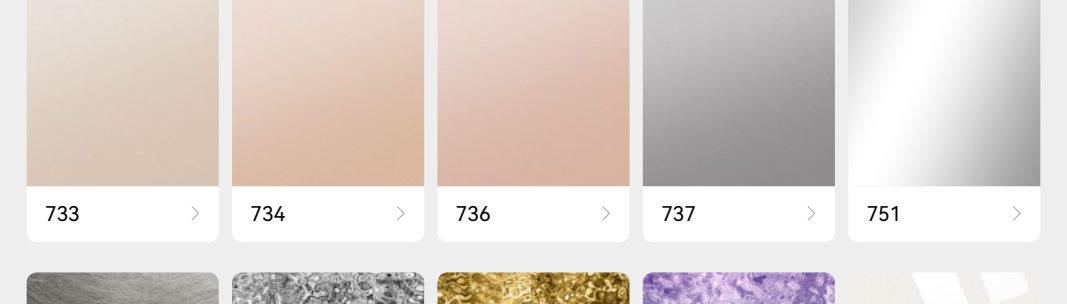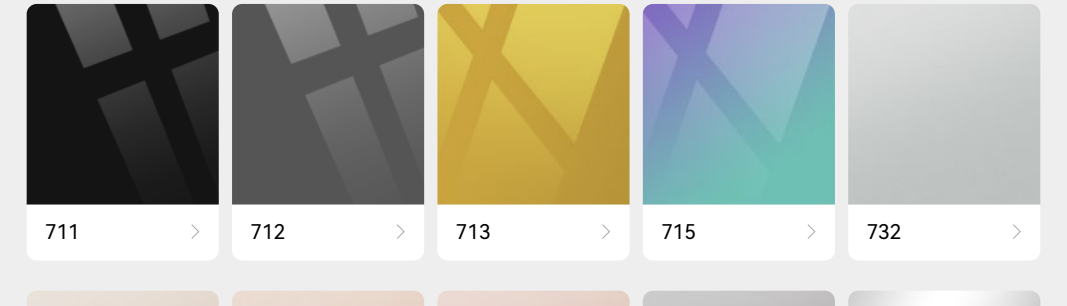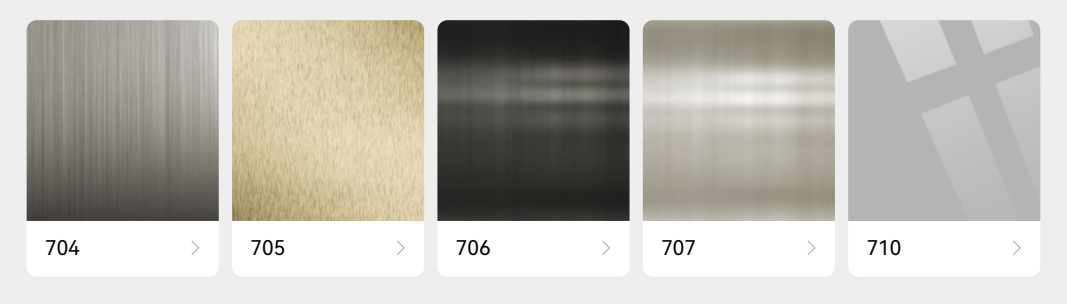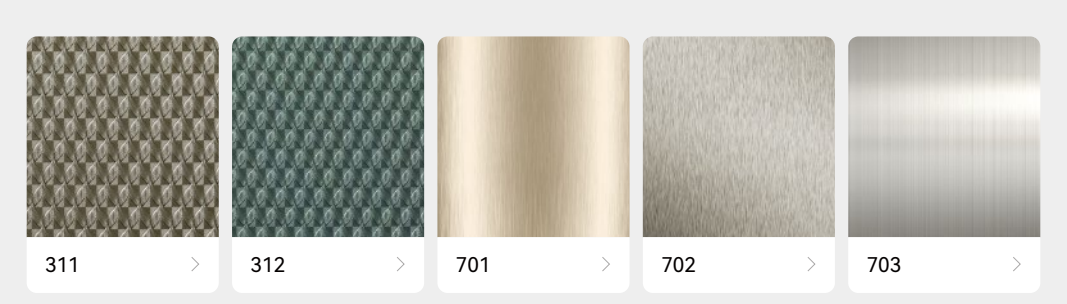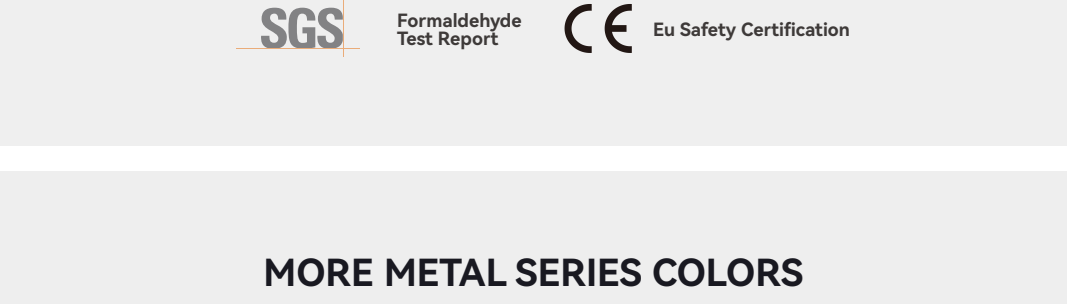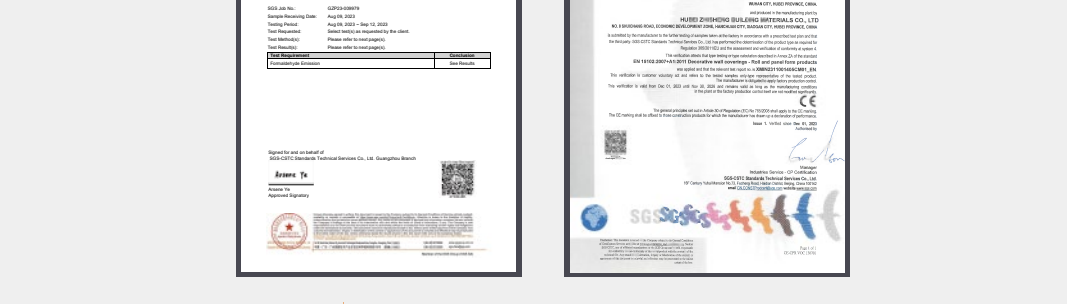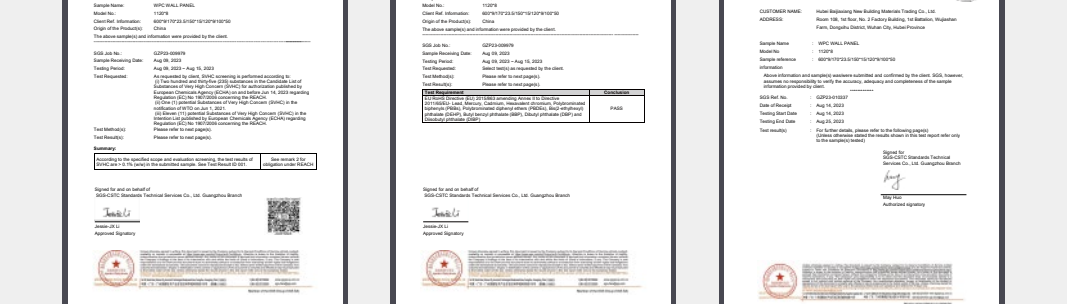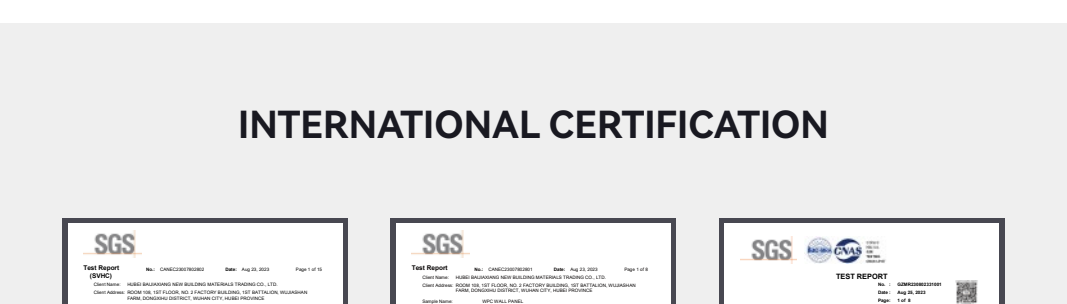










INTERNATIONAL CERTIFICATION

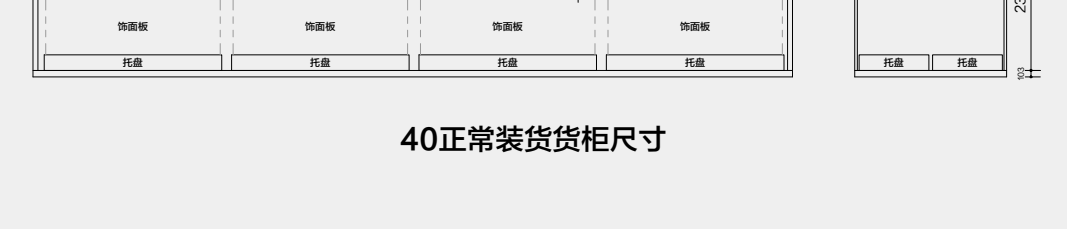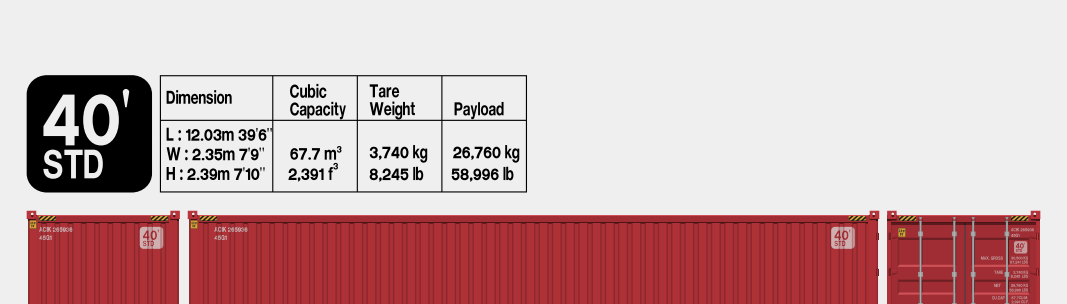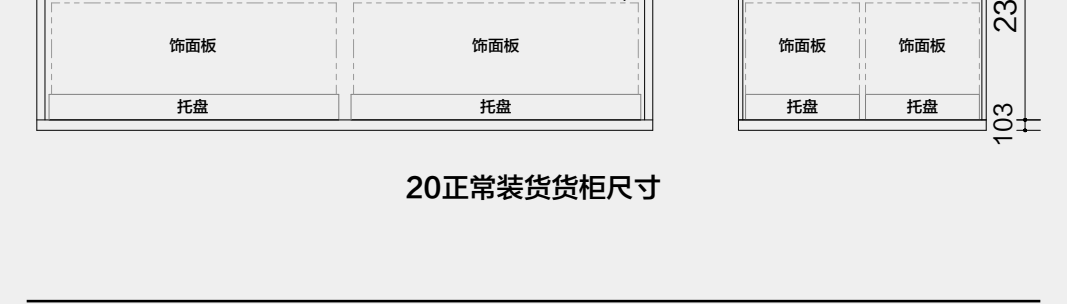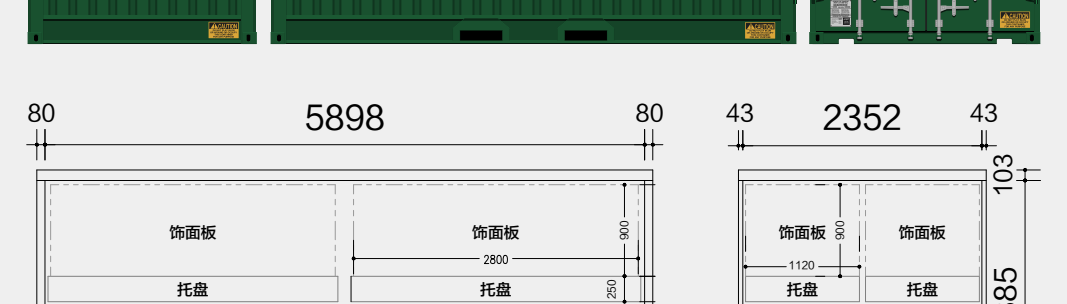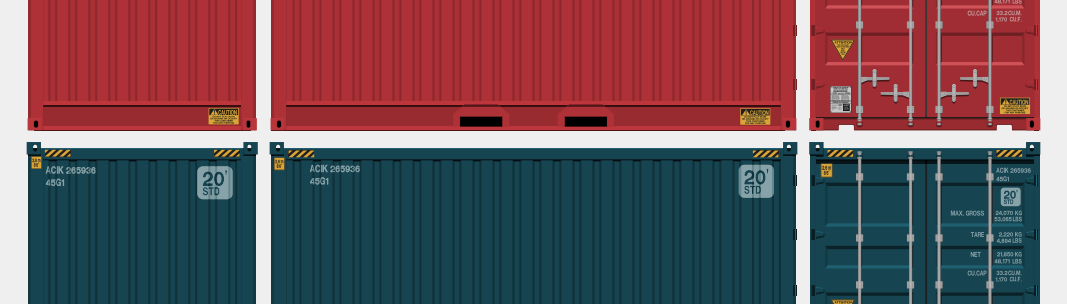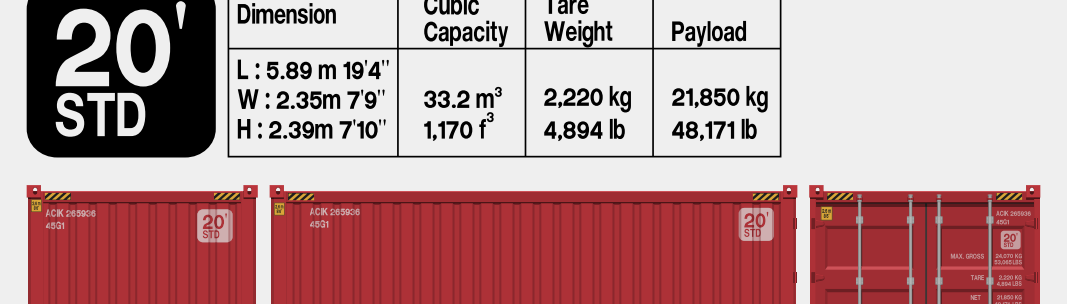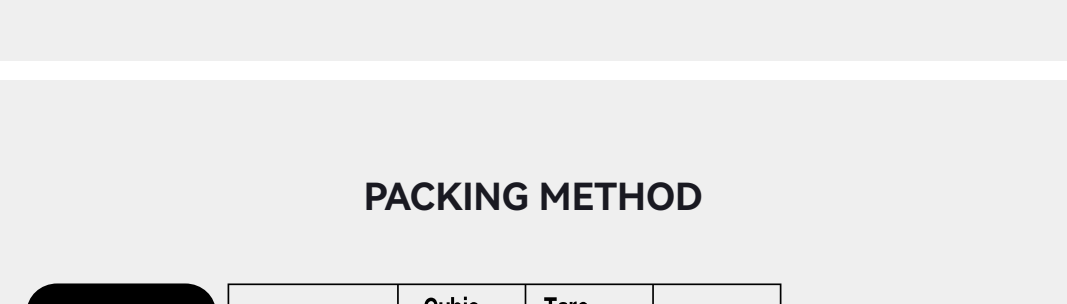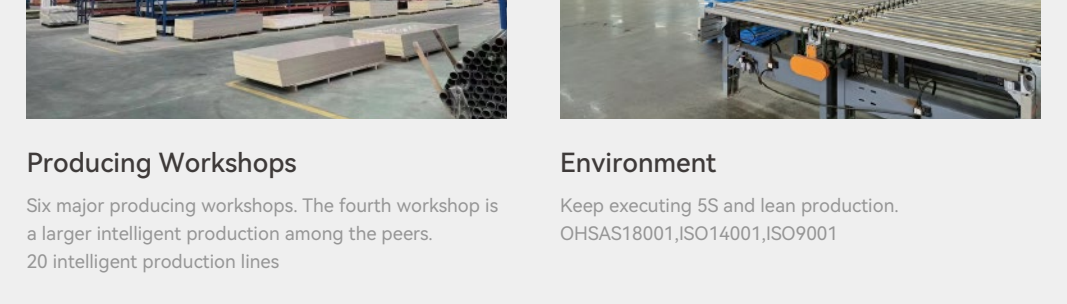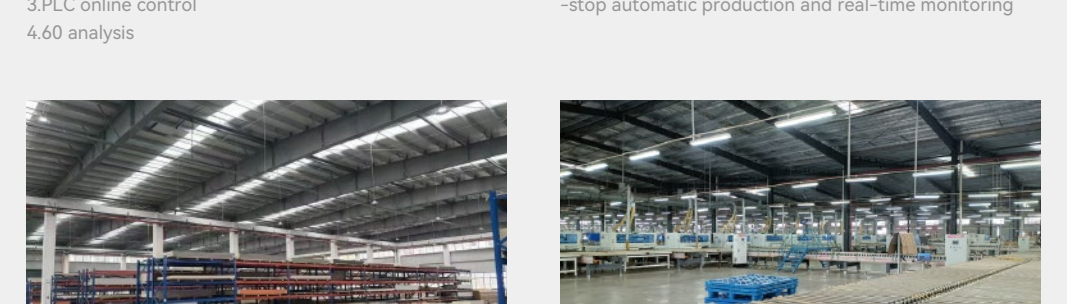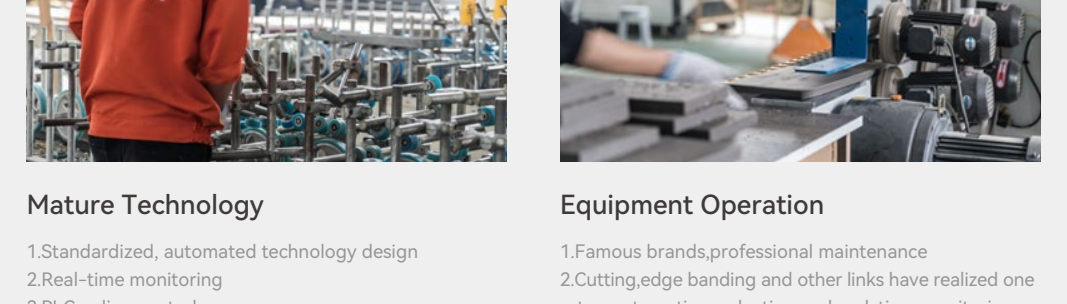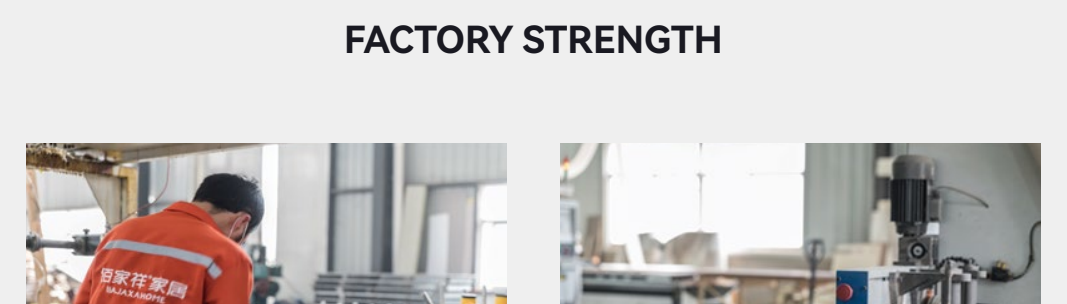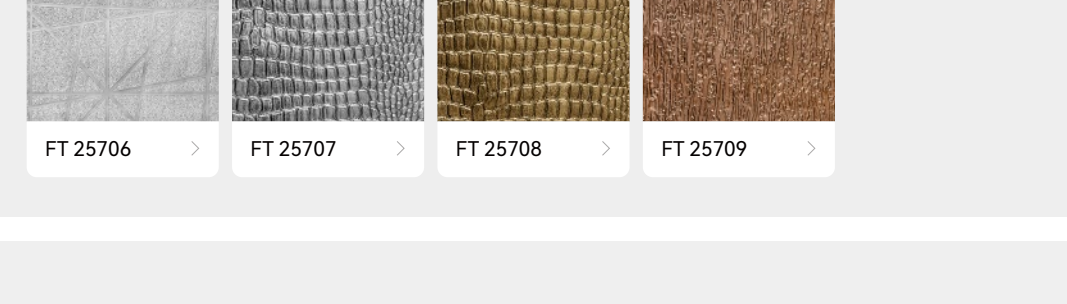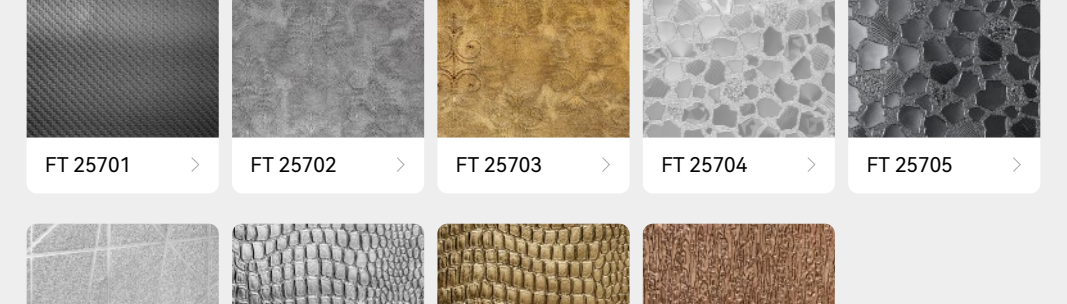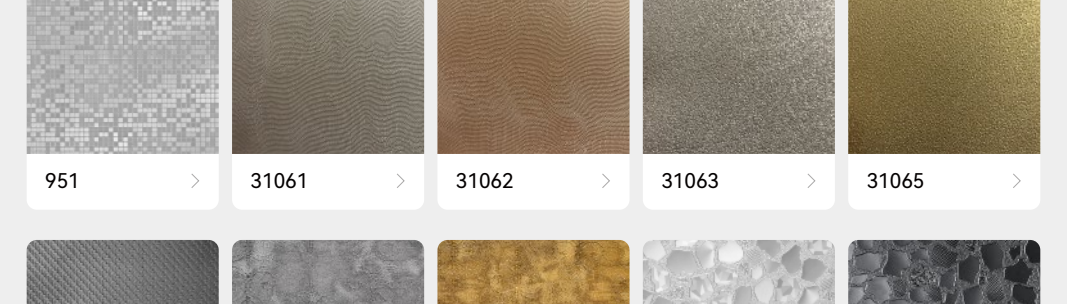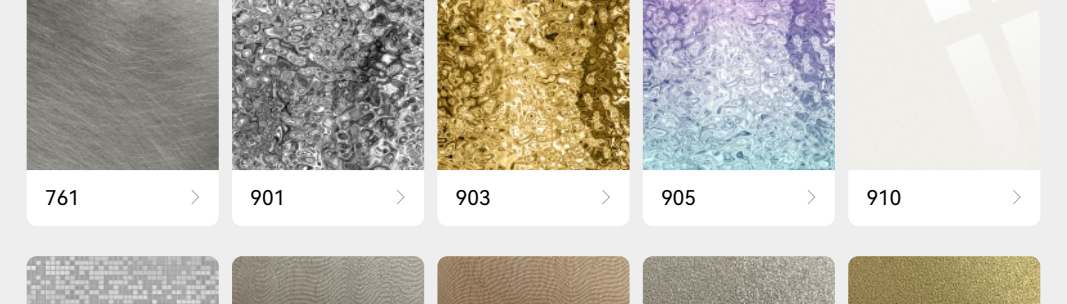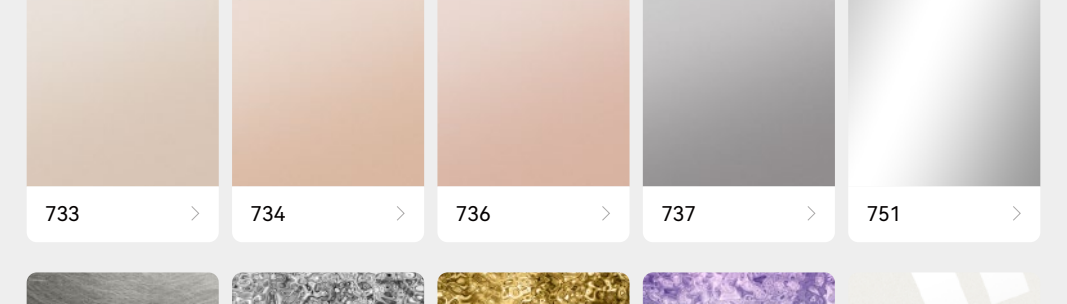

MORE METAL SERIES COLORS

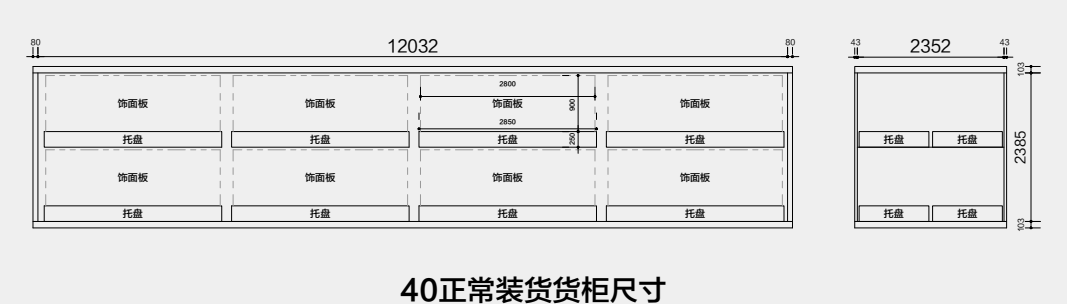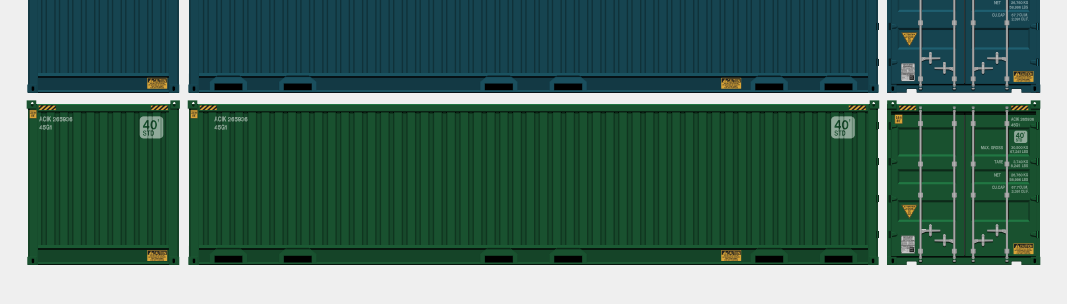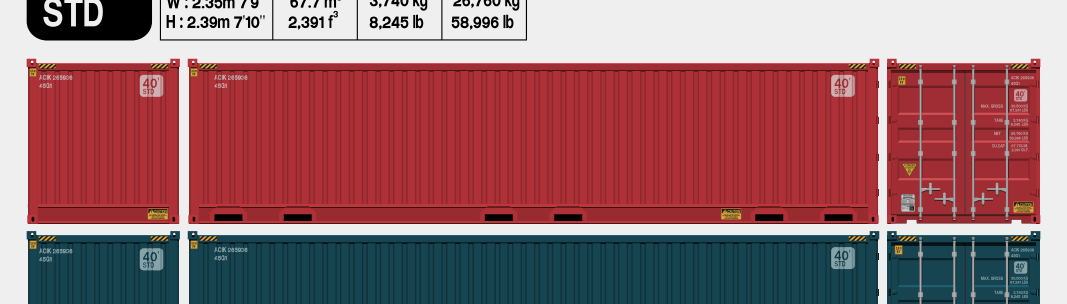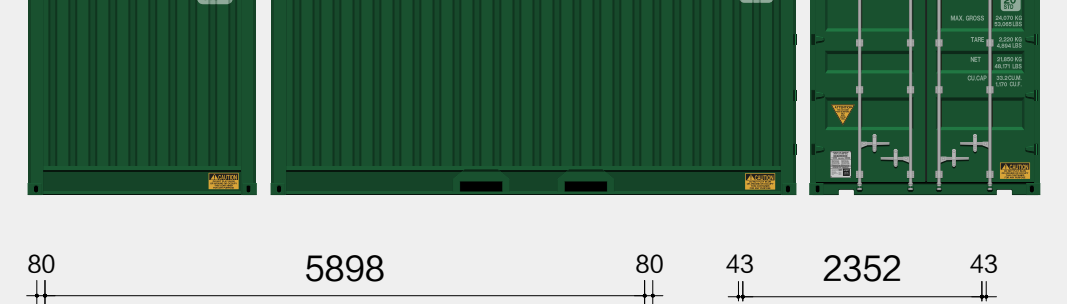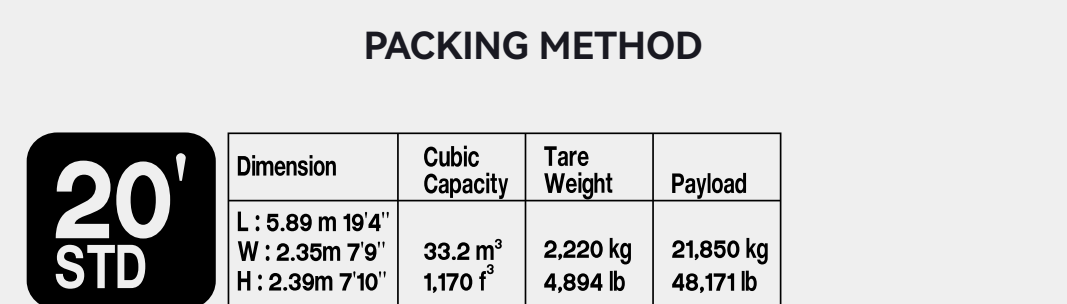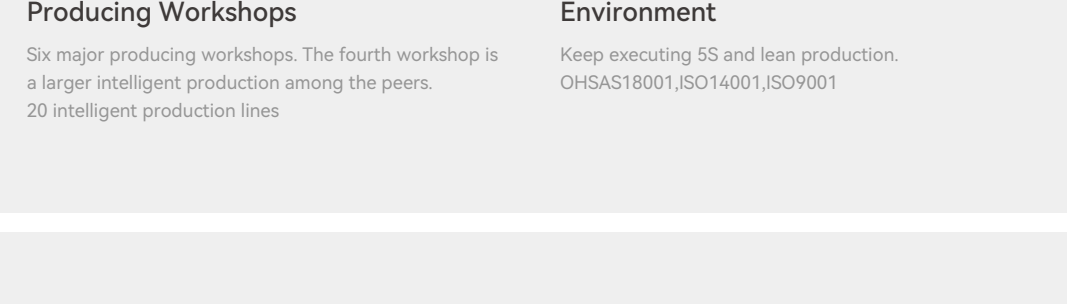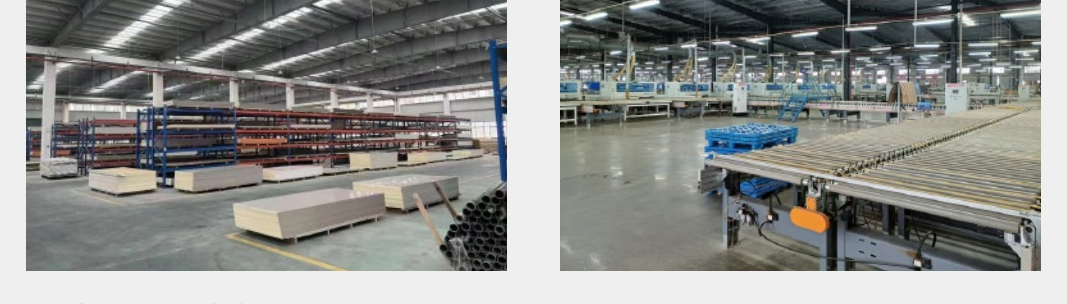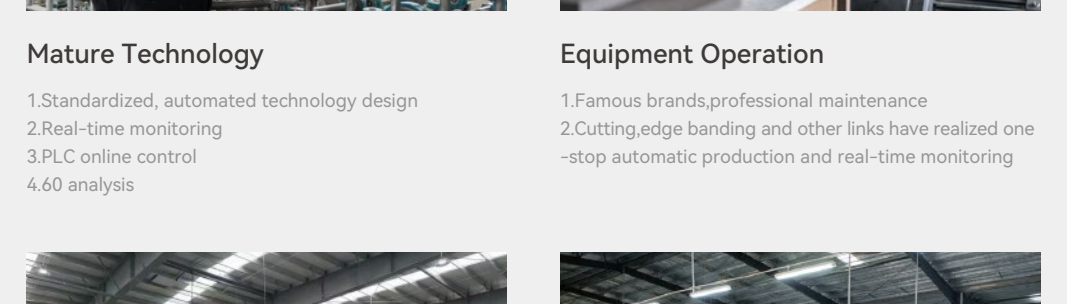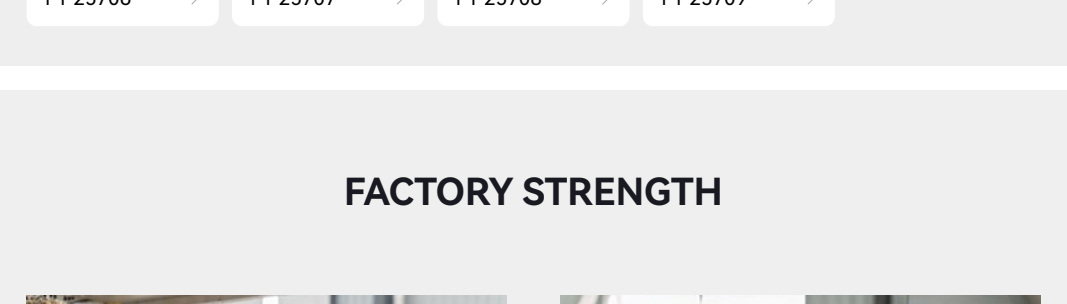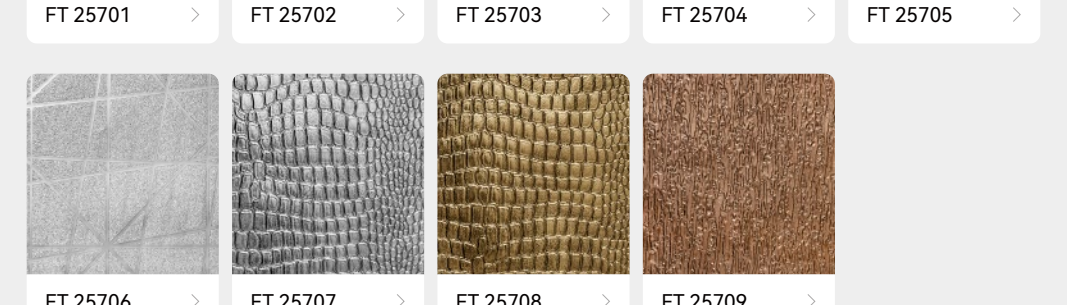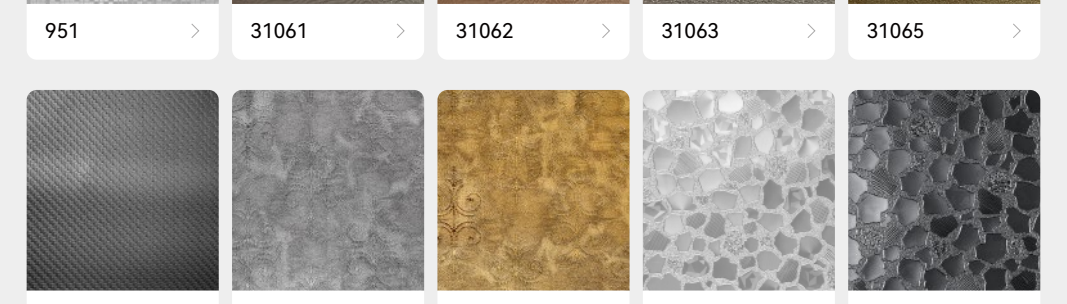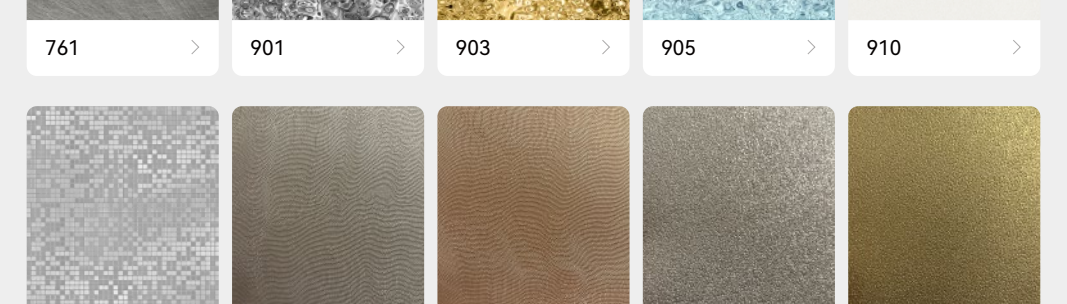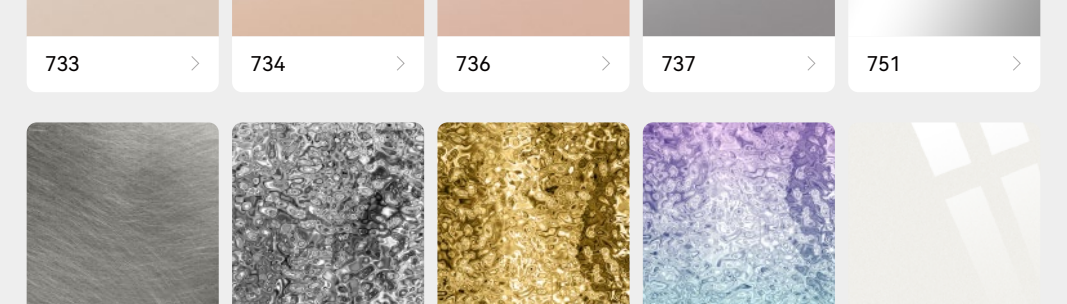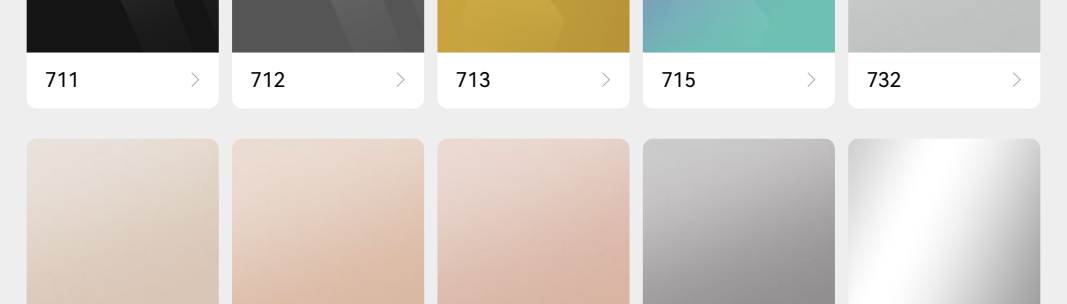

FACTORY STRENGTH

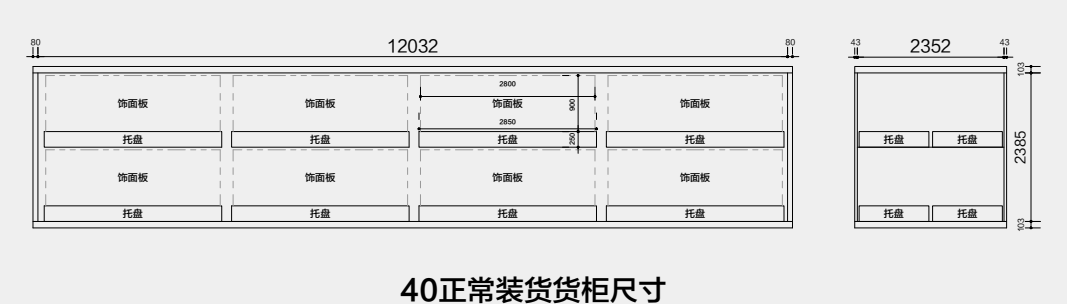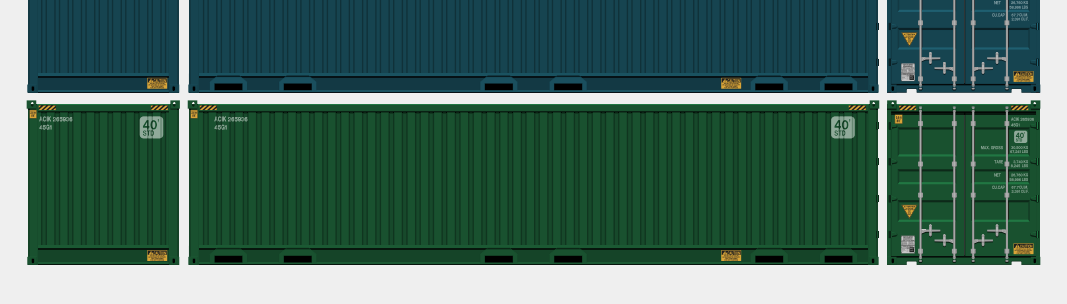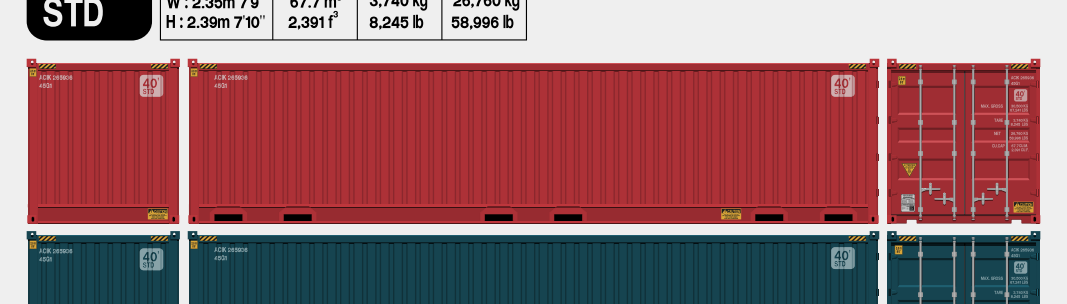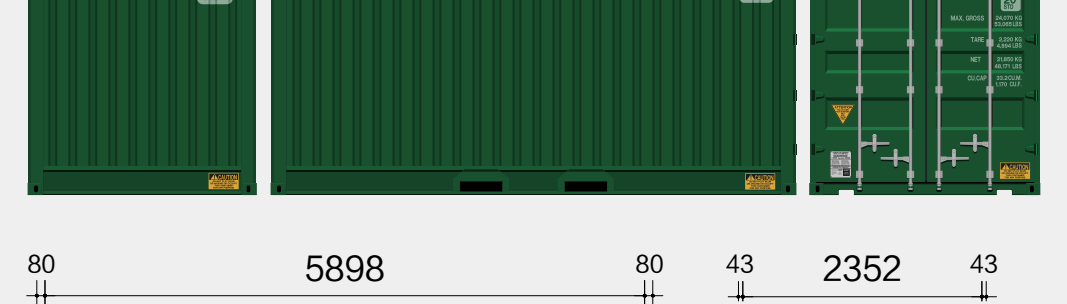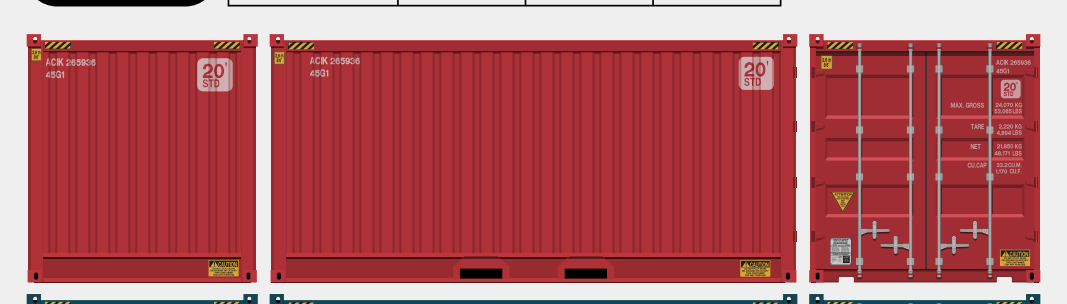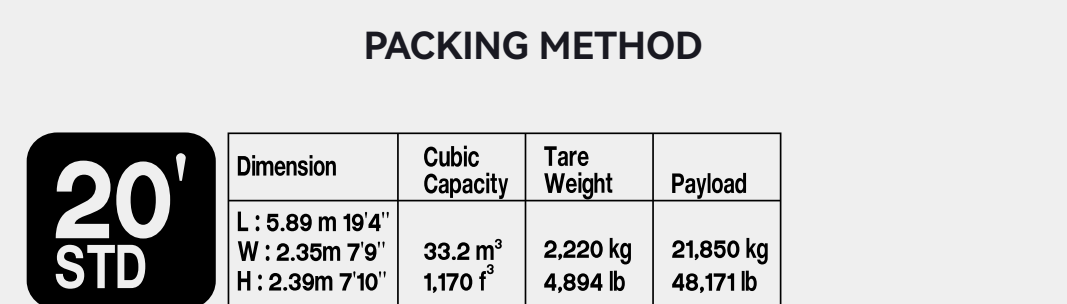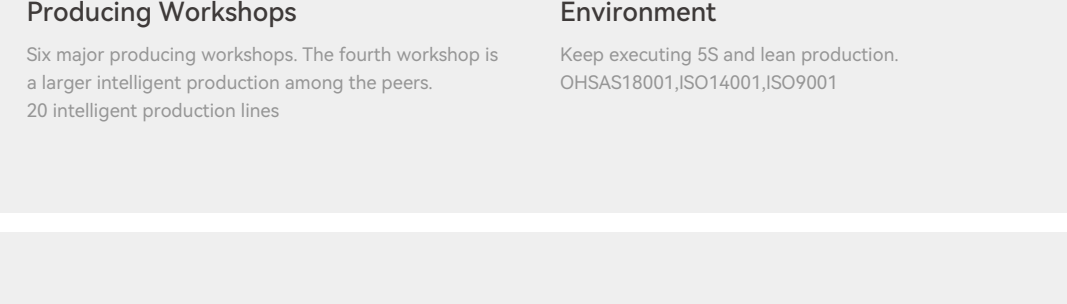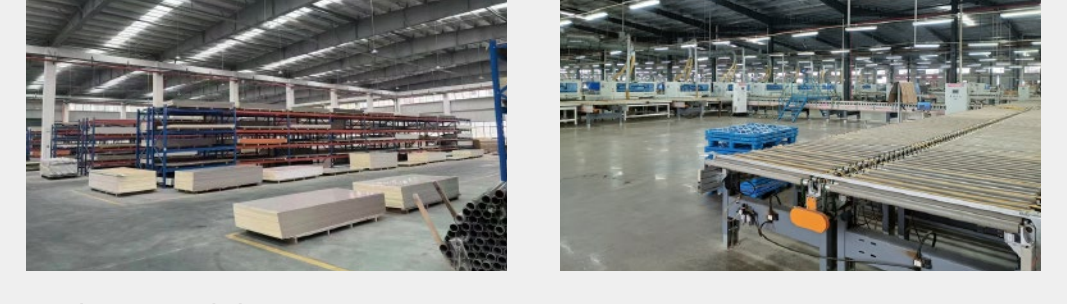

Mature Technology

1.Standardized, automated technology design

2.Real-time monitoring

3.PLC online control






4.60 analysis

Equipment Operation

1.Famous brands,professional maintenance

2.Cutting,edge banding and other links have realized one

-stop automatic production and real-time monitoring

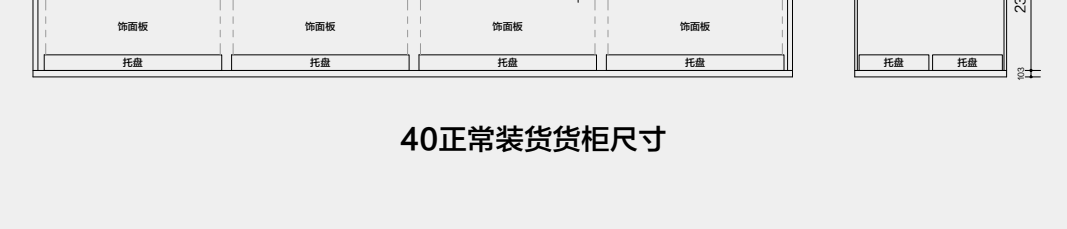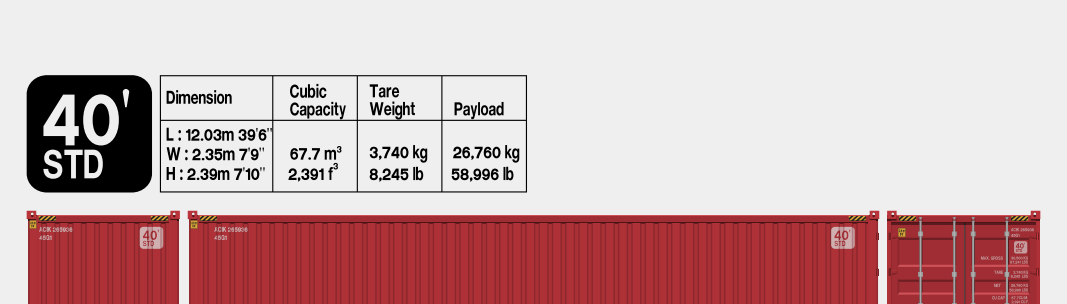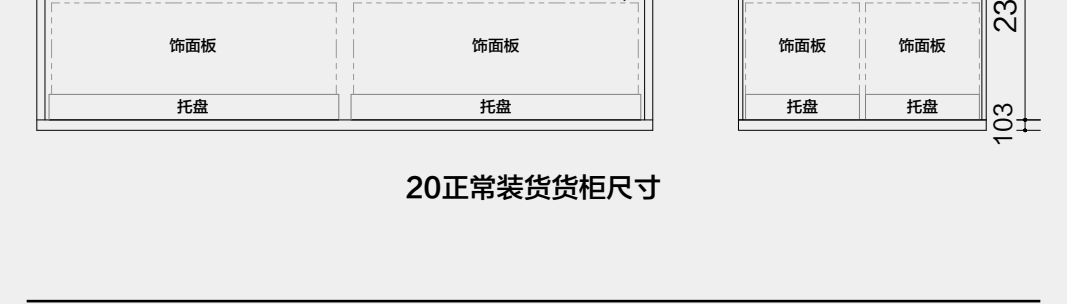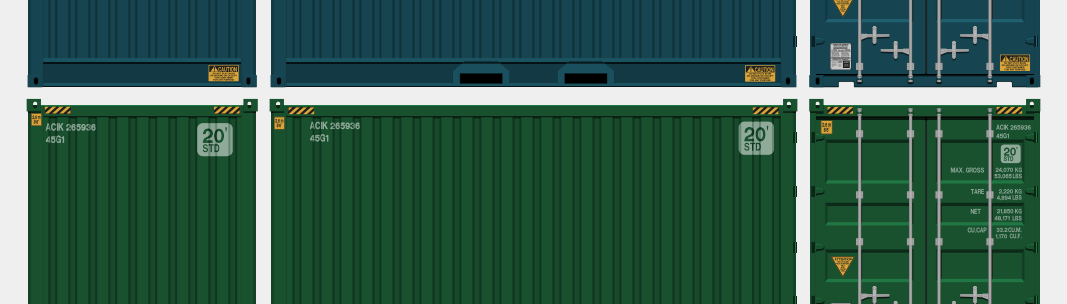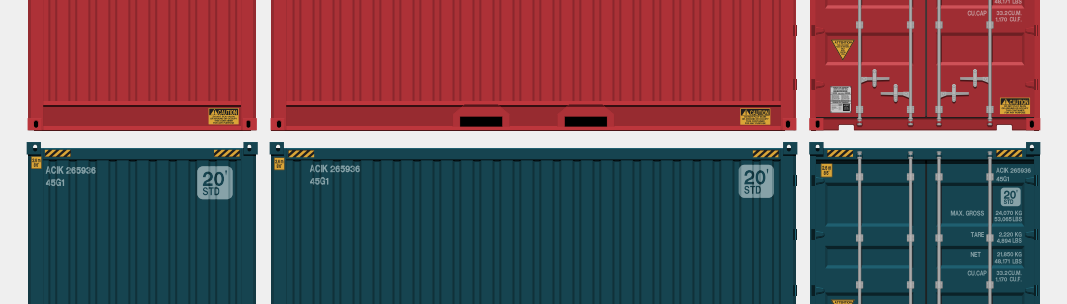

Producing Workshops

Six major intelligent workshops. The fourth workshop is a larger intelligent production among the peers.





20 intelligent production lines

Environment

Keep executing 5S and lean production.

OHSAS18001,ISO14001,ISO9001

PACKING METHOD

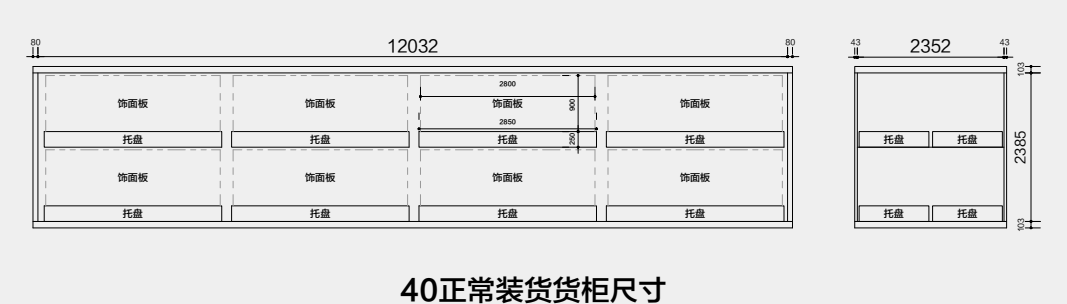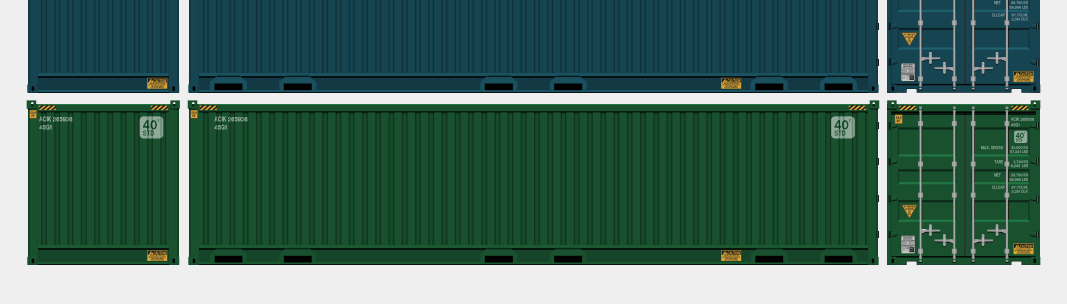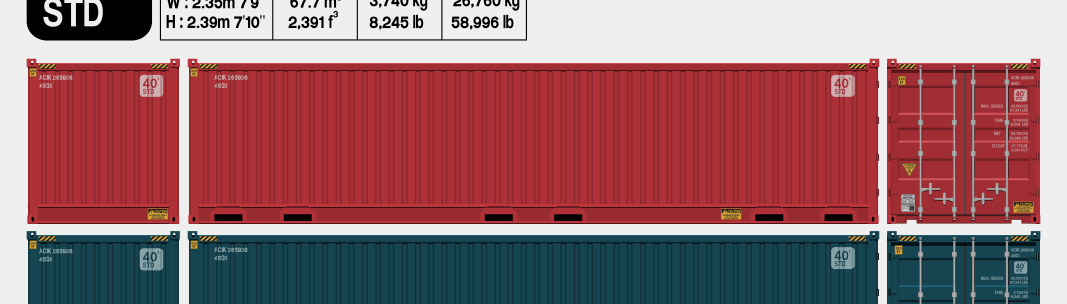

40' STD

Dimension

L: 12.03m 39'6"
W: 2.35m 7'9"
H: 2.39m 7'10"

Cubic Capacity



67.7 m³
2,391 f³

Tare Weight

3,740 kg
8,245 lb

Payload

26,760 kg
58,996 lb

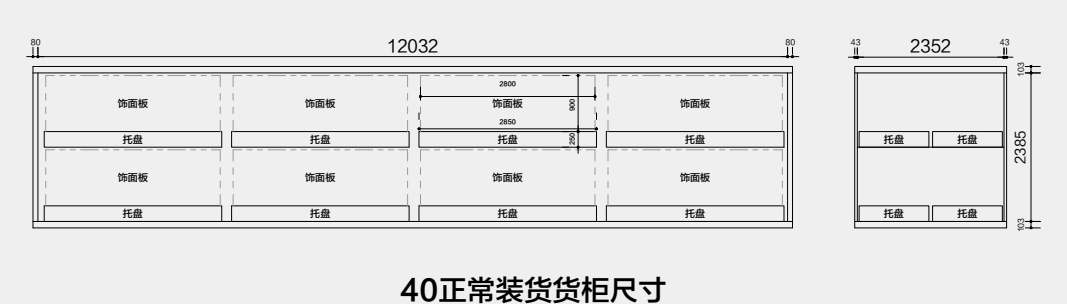

40正常装货货柜尺寸