

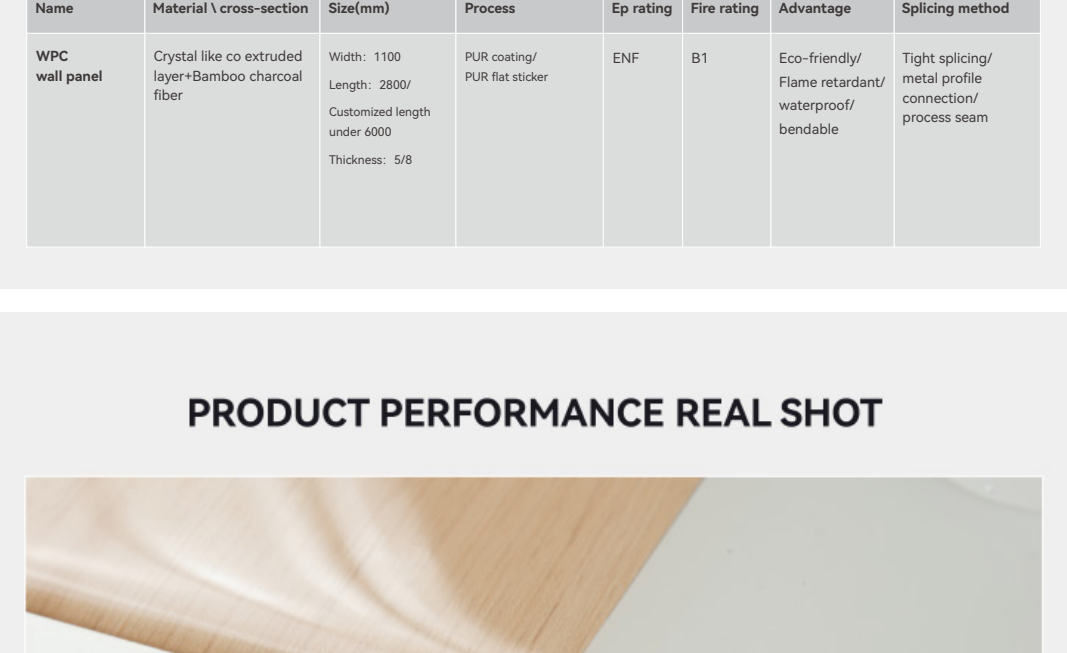


81031

COLOR NUMBER




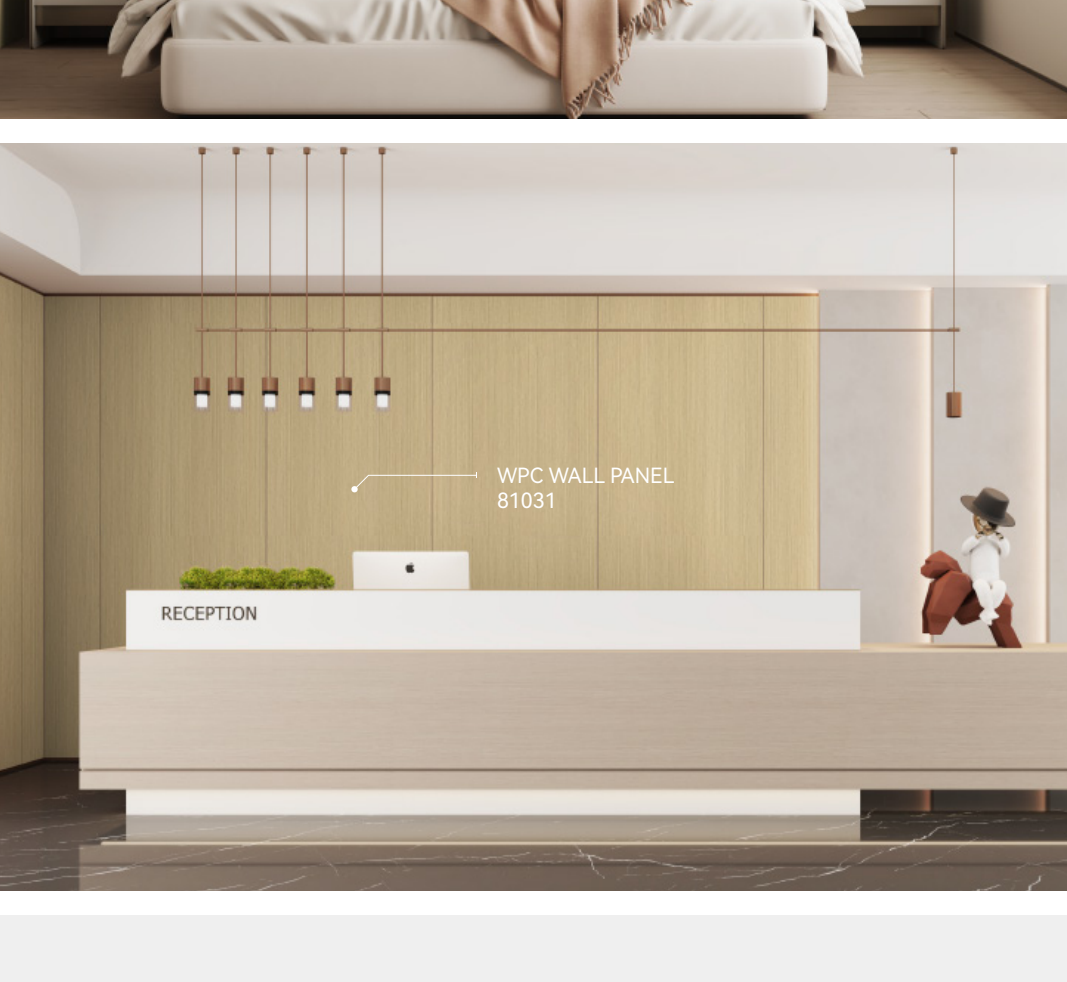


PRODUCT INFORMATION

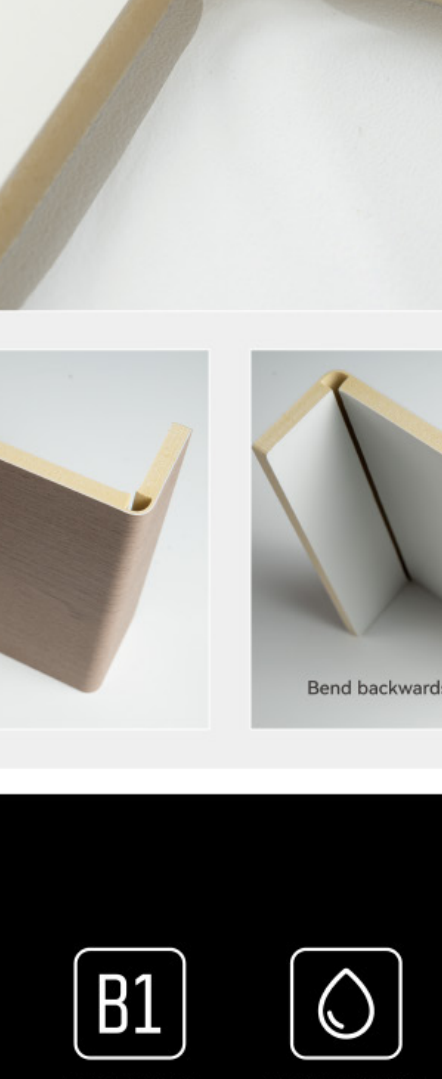


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

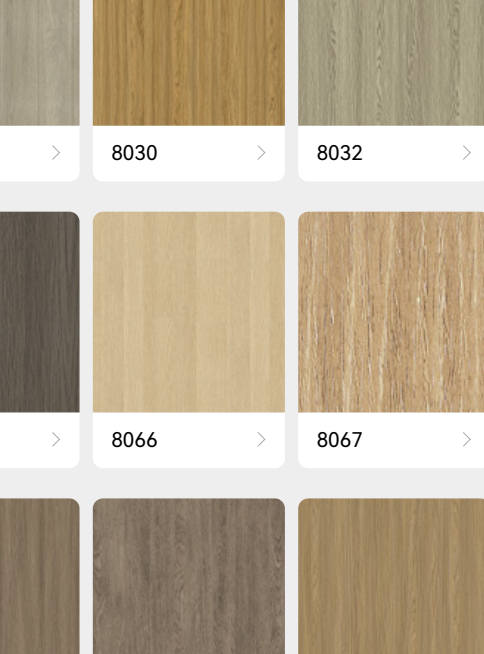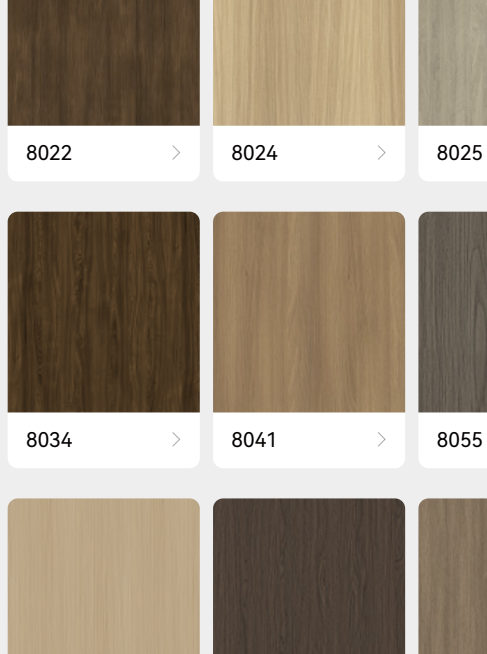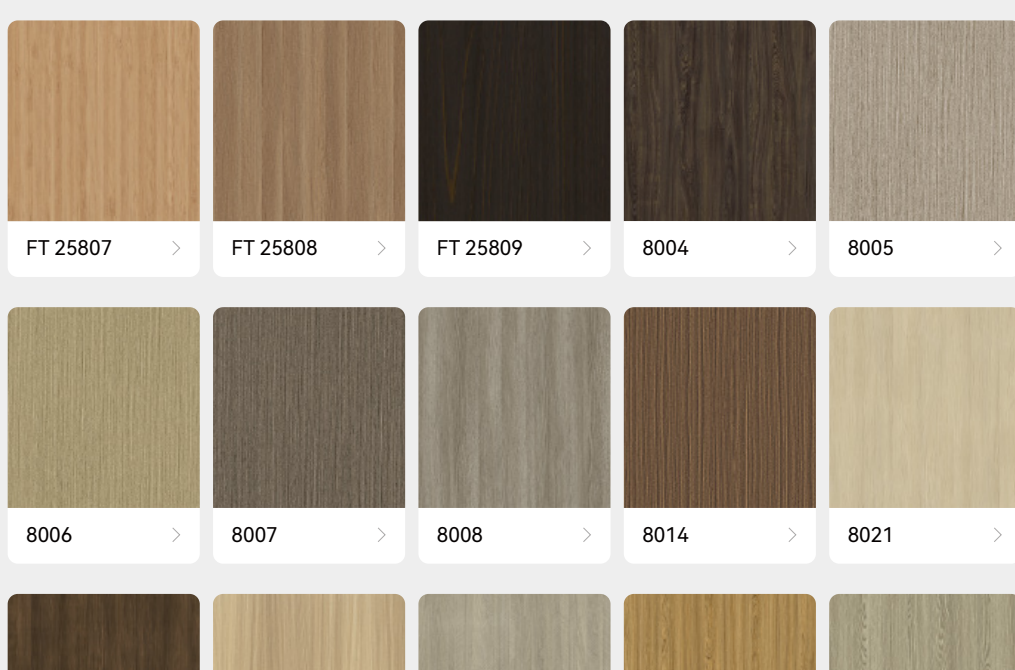

EP LEVEL



FIRE RATING



WATERPROOF






BENDABLE

MORE WOOD GRAIN COLORS



INTERNATIONAL CERTIFICATION

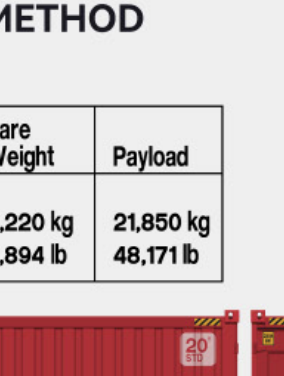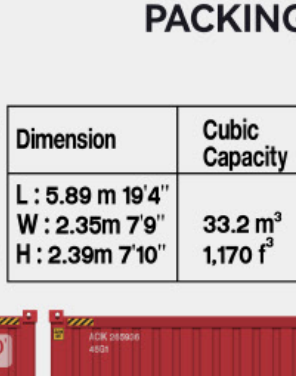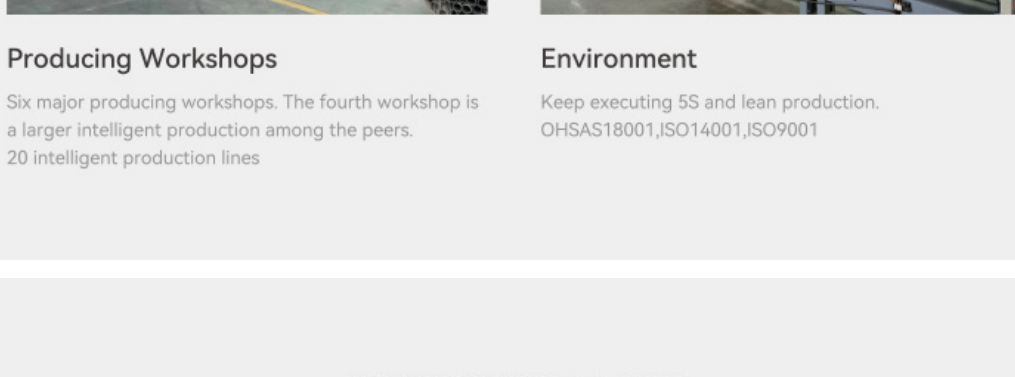



SGS

Formaldehyde Test Report



Eu Safety Certification

FACTORY STRENGTH

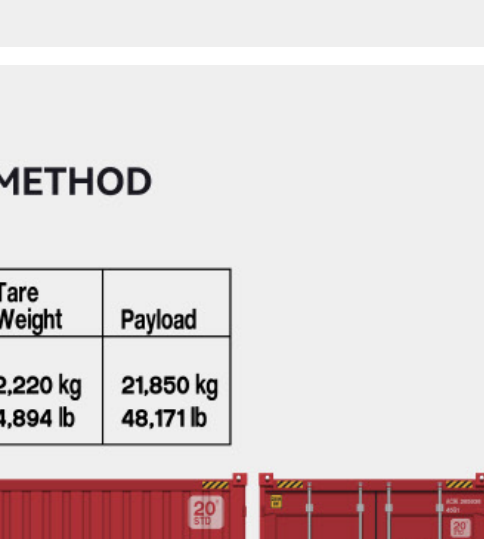
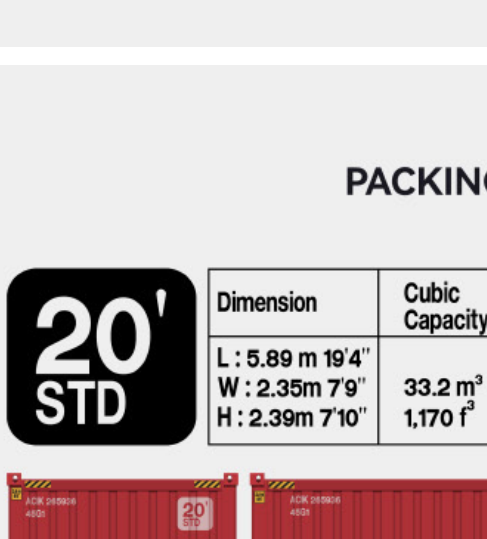


Mature Technology

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 60 analysis

Equipment Operation

1. Famous brands, professional maintenance
2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

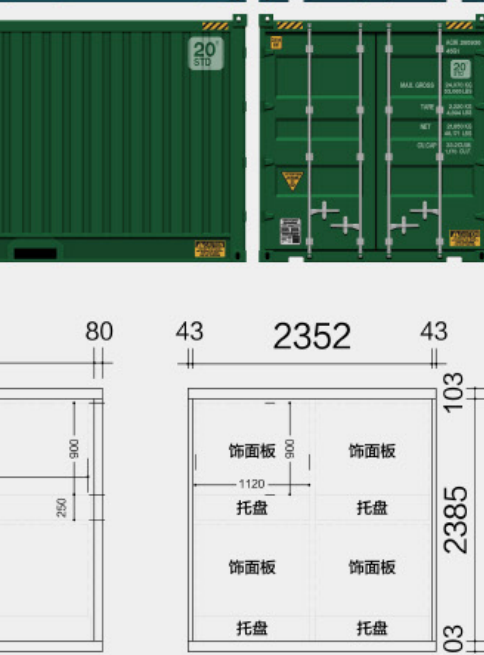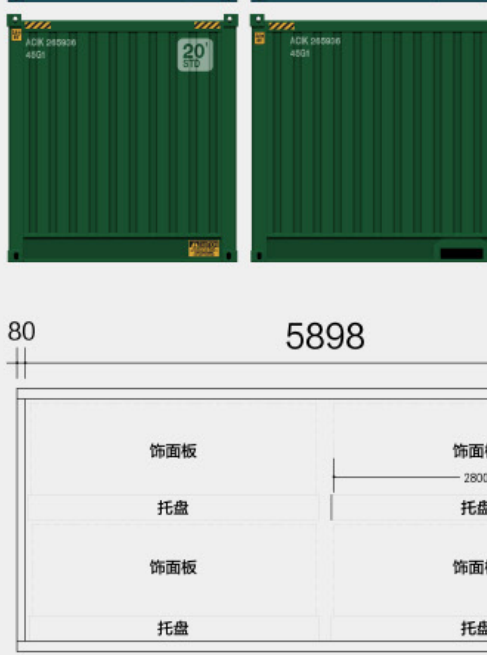


Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines

Environment

Keep executing 5S and lean production.
OHSAS18001, ISO14001, ISO9001

PACKING METHOD

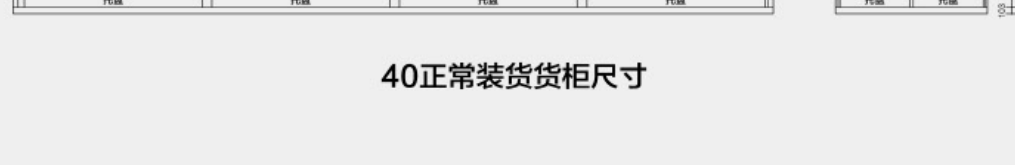

20'正常装货货柜尺寸

40'正常装货货柜尺寸