


KA 59504



PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm



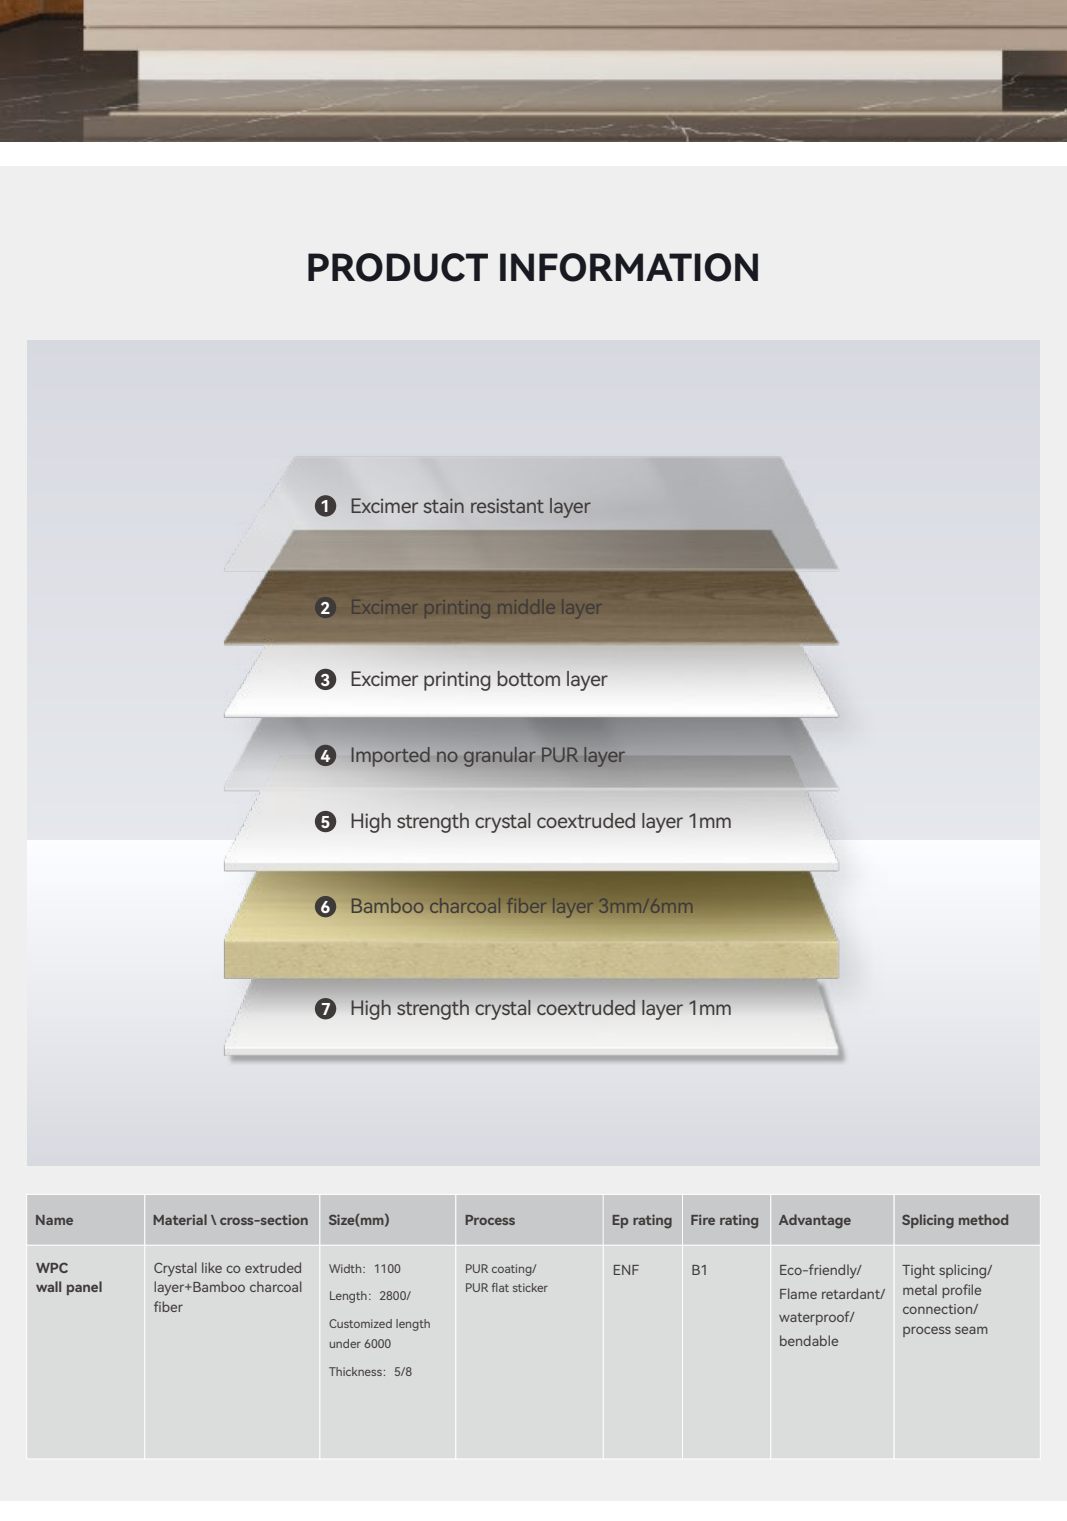


PRODUCT INFORMATION

- 1 Excimer stain resistant layer
- 2 Excimer printing middle layer
- 3 Excimer printing bottom layer
- 4 Imported no granular PUR layer
- 5 High strength crystal coextruded layer 1mm
- 6 Bamboo charcoal fiber layer 3mm/6mm
- 7 High strength crystal coextruded layer 1mm

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 4000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

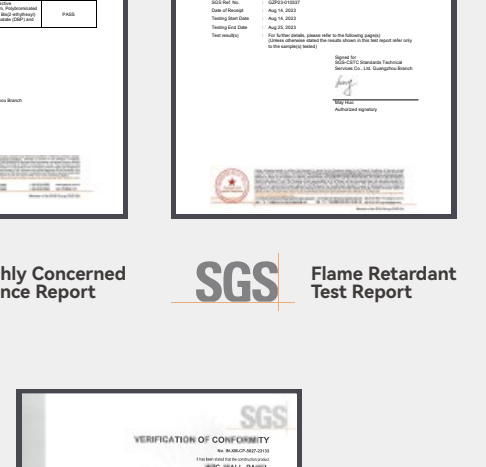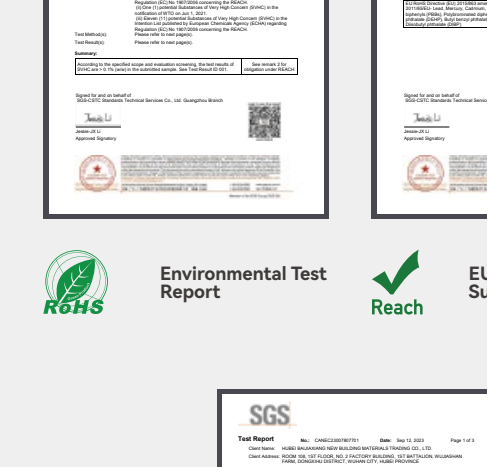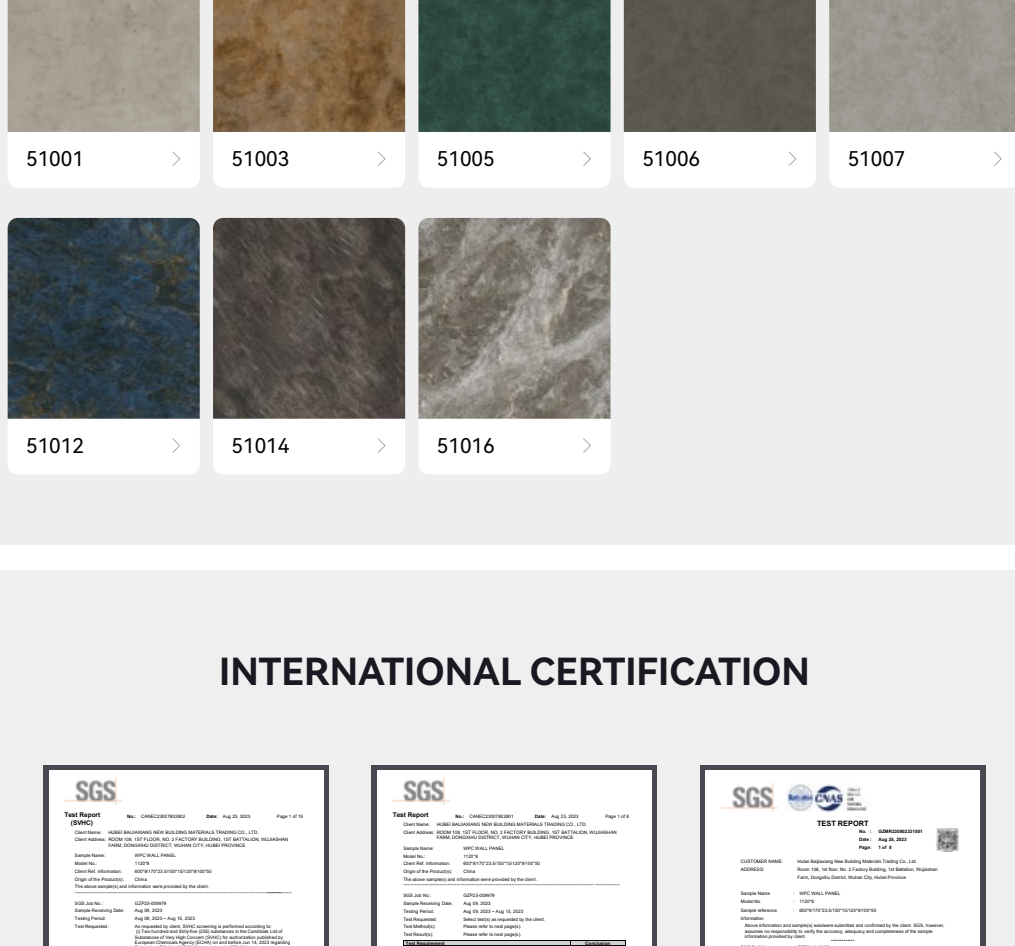

ENF

EP LEVEL

B1

FIRE RATING




WATERPROOF




BENDABLE


MORE STONE GRAIN COLORS

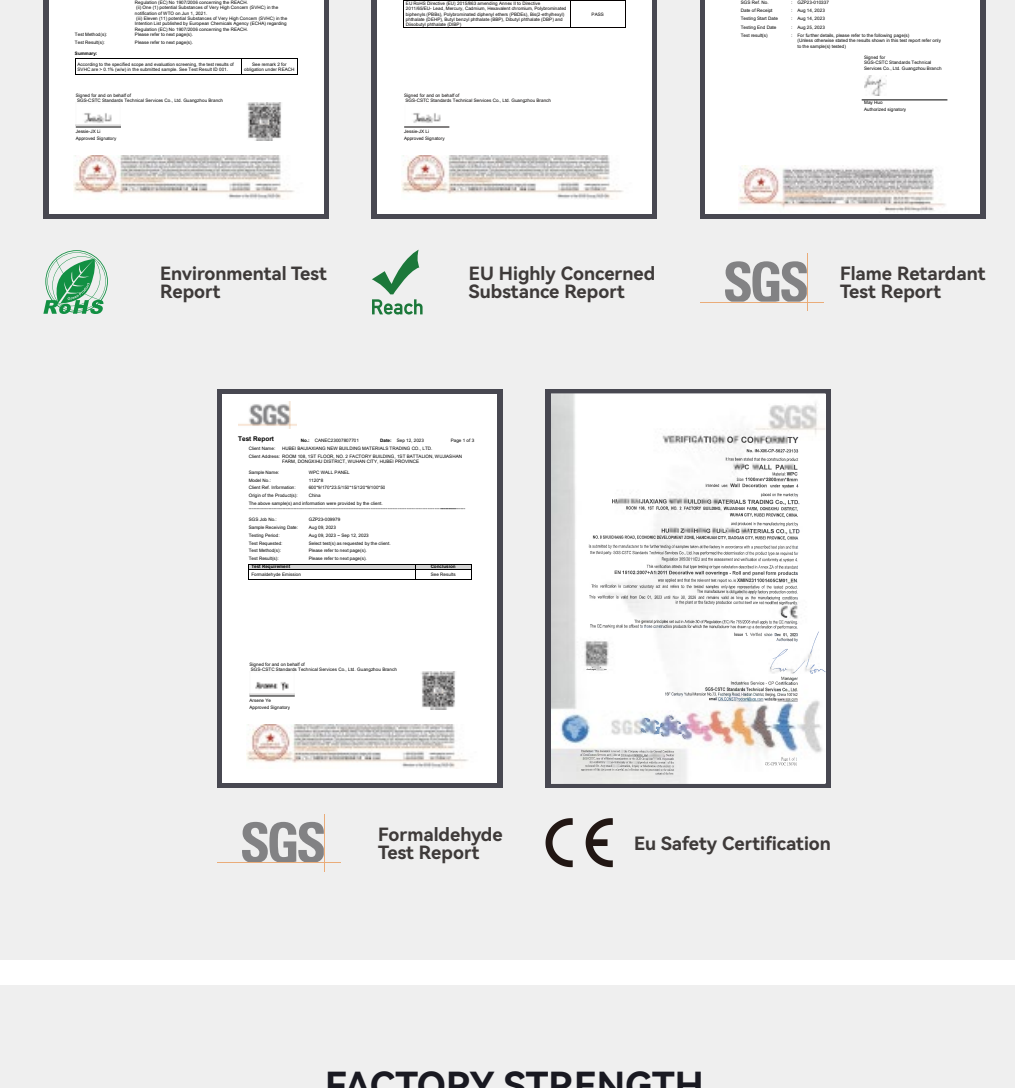


INTERNATIONAL CERTIFICATION




Environmental Test Report



EU Highly Concerned Substance Report



Flame Retardant Test Report

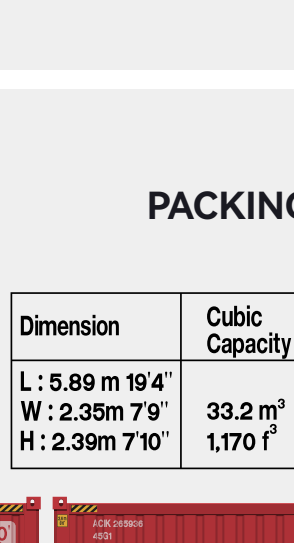

Formaldehyde Test Report




Eu Safety Certification

FACTORY STRENGTH




Mature Technology

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 60 analysis

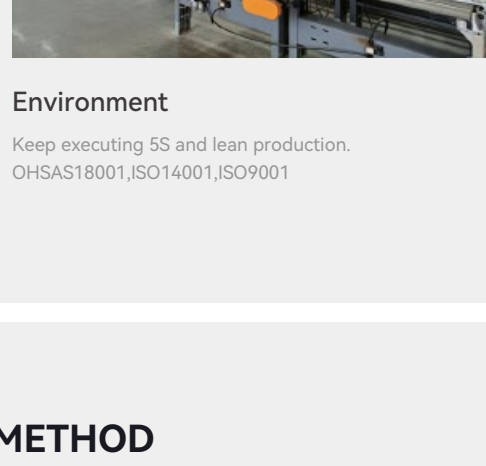


Equipment Operation

1. Famous brands, professional maintenance
2. Cutting-edge banding and other links have realized one-stop automatic production and real-time monitoring

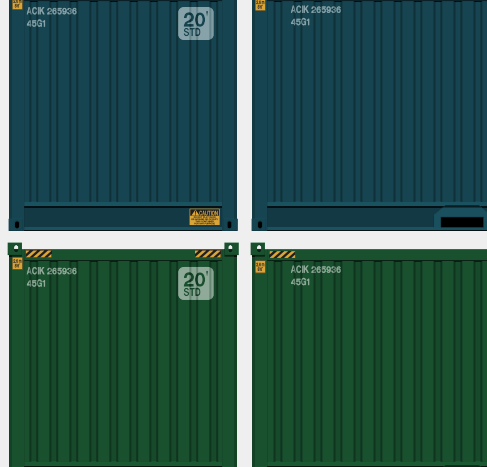

Producing Workshops


Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines

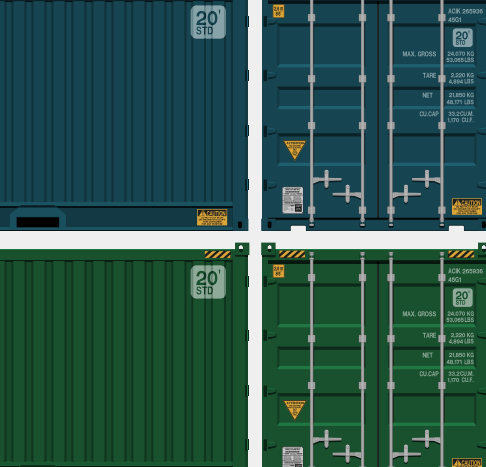



Environment

Keep executing 5S and lean production.
OHSAS18001, ISO14001, ISO9001

PACKING METHOD



Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89m 19'4"			
W : 2.35m 7'9"	33.2 m³	2,220 kg	21,850 kg
H : 2.39m 7'10"	1,170 f³	4,894 lb	48,171 lb

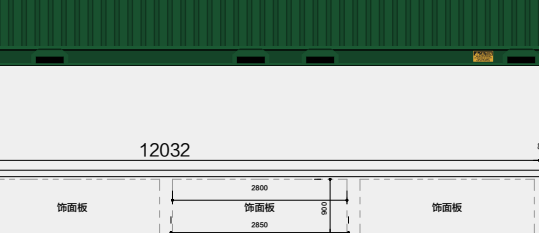

20正常装货货柜尺寸

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'6"			
W : 2.35m 7'9"	67.7 m³	3,740 kg	26,760 kg
H : 2.39m 7'10"	2,391 f³	8,245 lb	58,996 lb

40正常装货货柜尺寸