



- SOLID COLOR -

3037
COLOR NUMBER


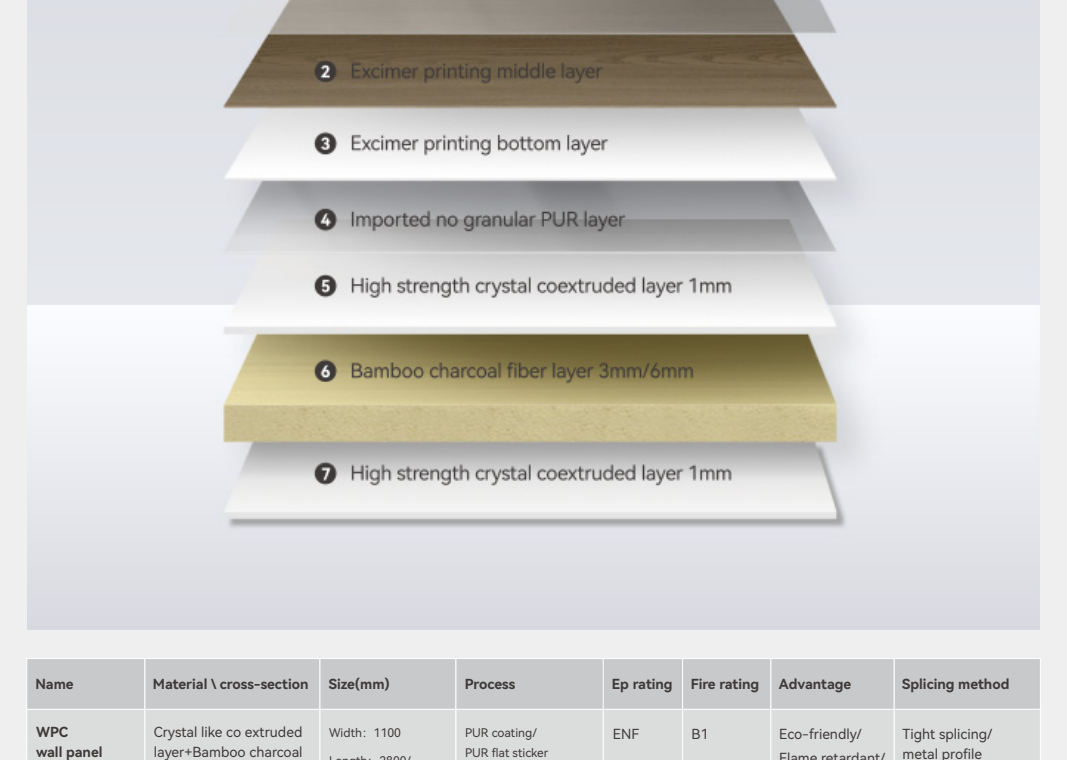


PRODUCT INFORMATION

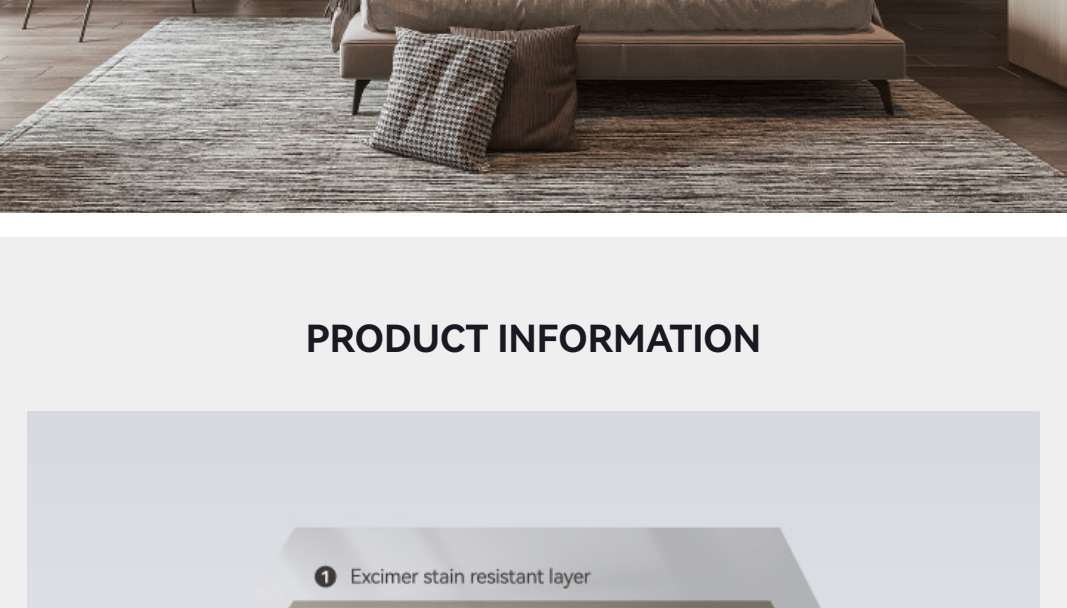

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

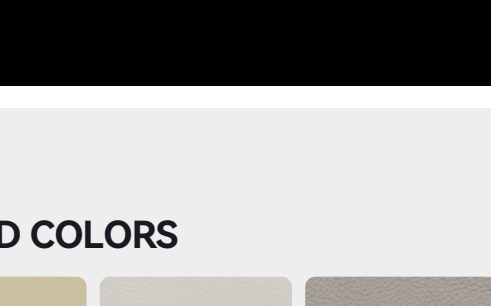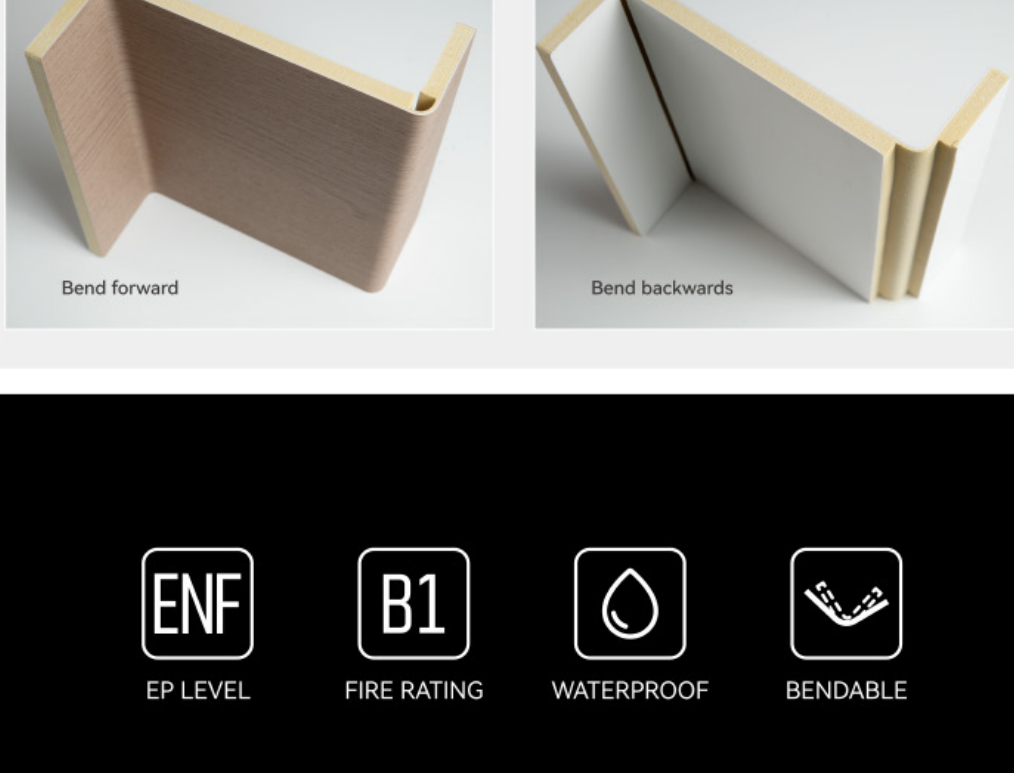


ENF
EP LEVEL

B1
FIRE RATING


WATERPROOF

BENDABLE



MORE SOLID COLORS

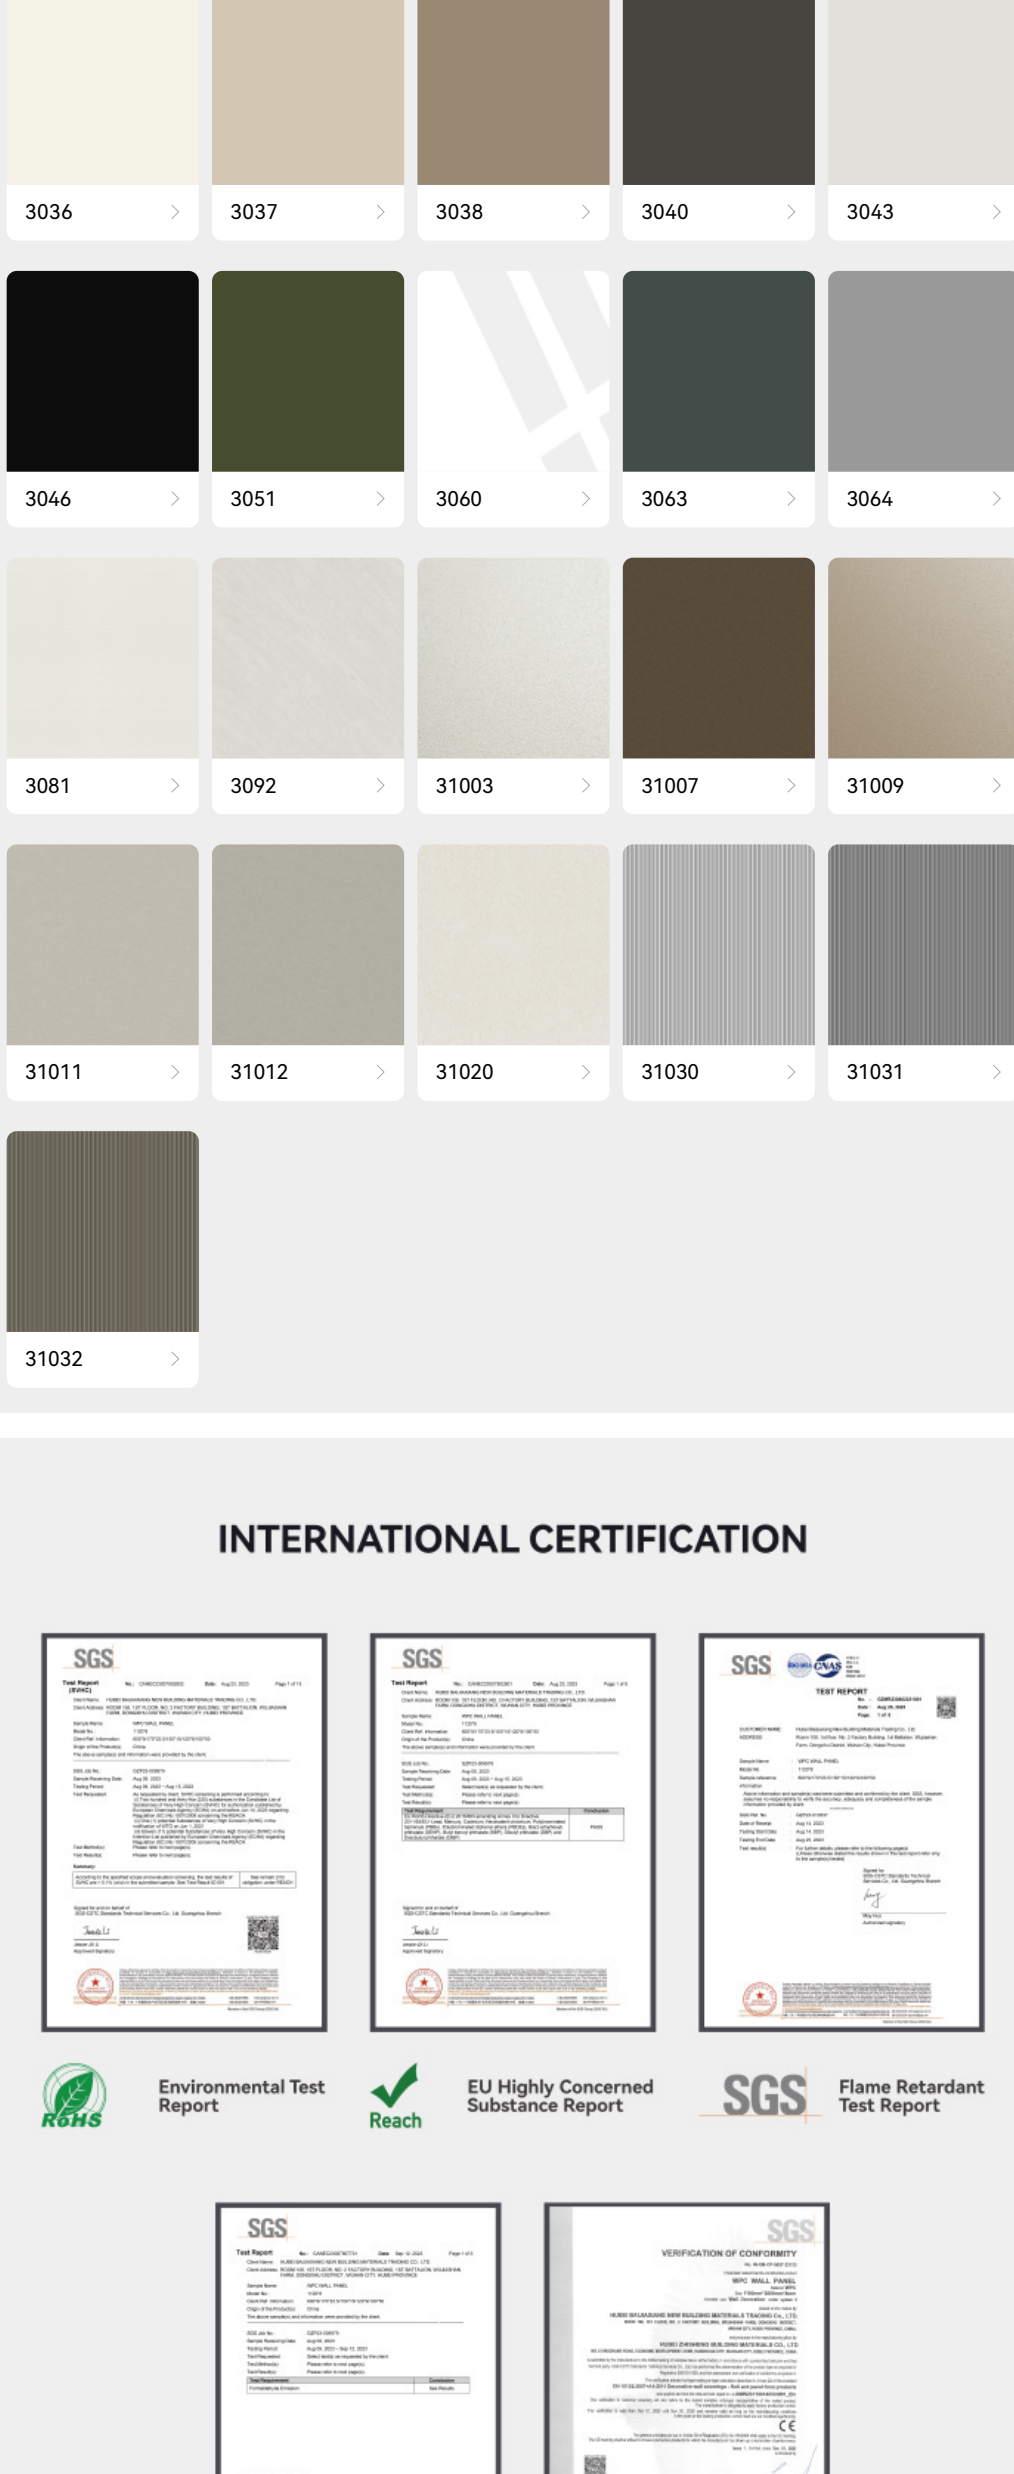

INTERNATIONAL CERTIFICATION

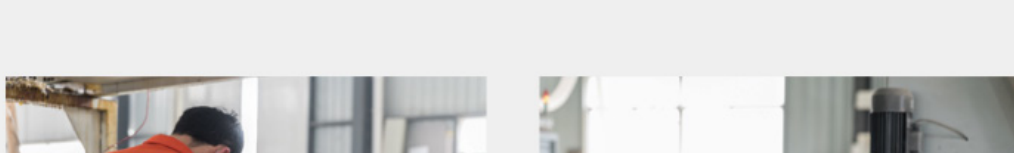

FACTORY STRENGTH

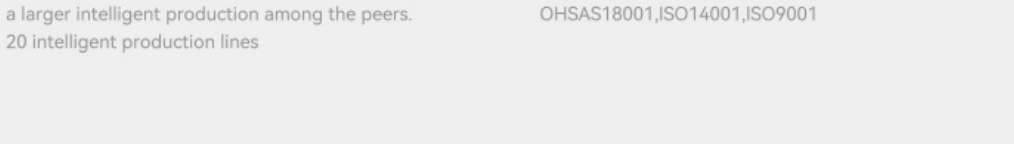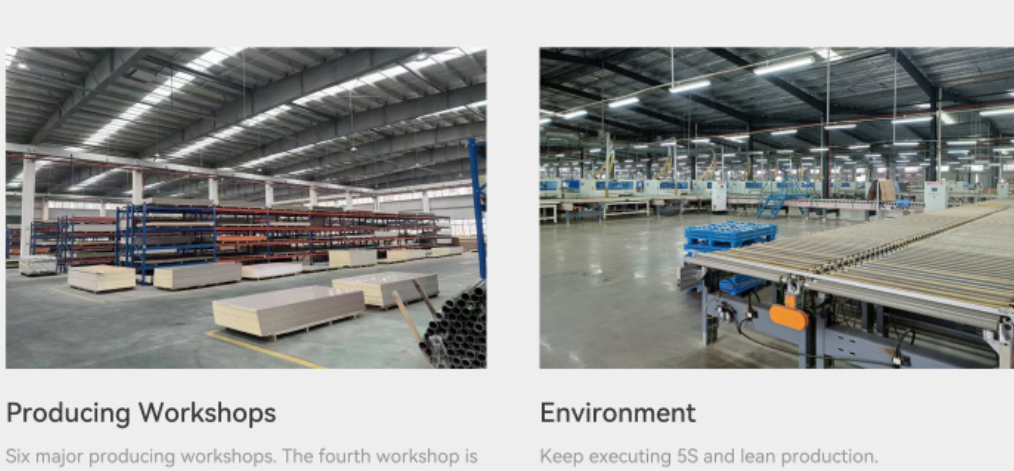

PACKING METHOD

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 5.89 m 19'4" W : 2.35m 7'9" H : 2.39m 7'10"	33.2 m³ 1,170 f³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

