

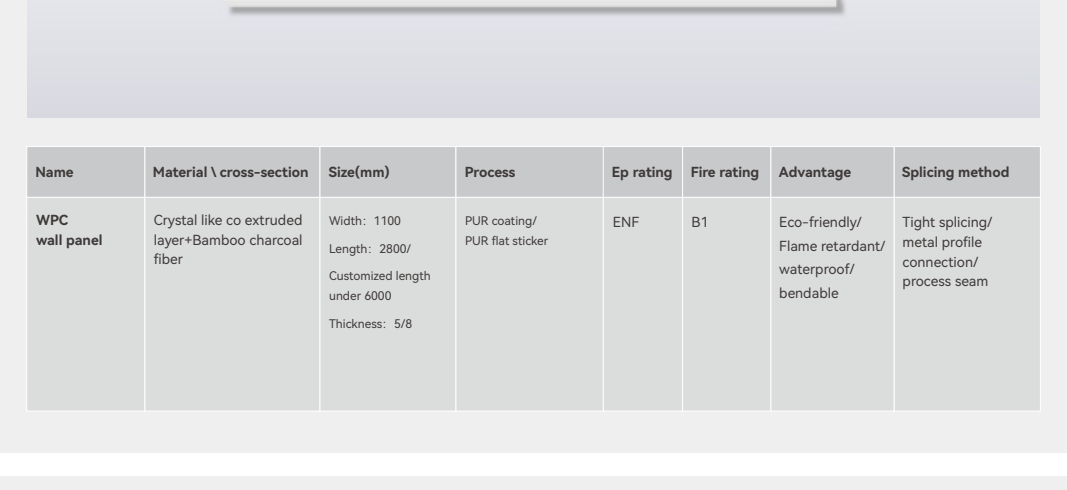


## 8041

COLOR NUMBER


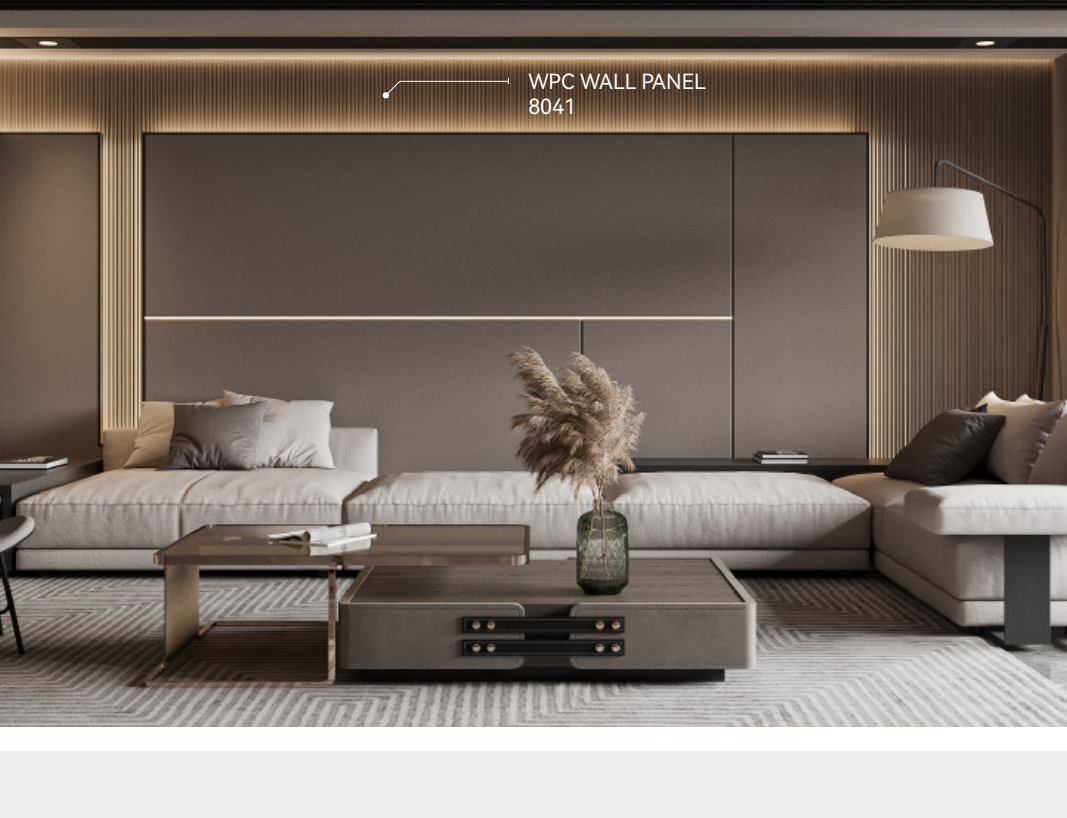


## PRODUCT INFORMATION

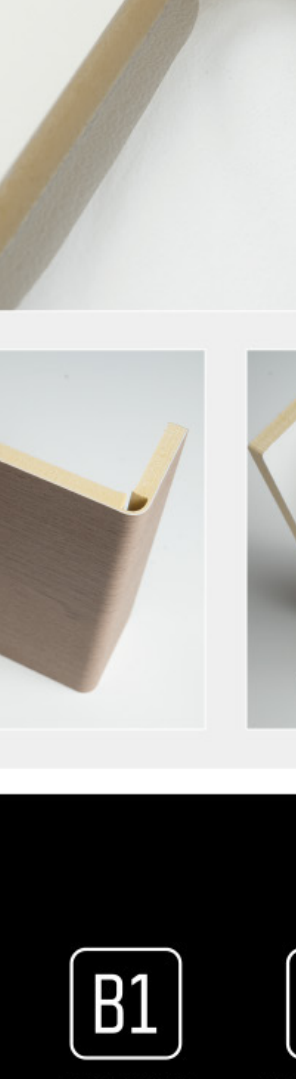

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

## PRODUCT PERFORMANCE REAL SHOT

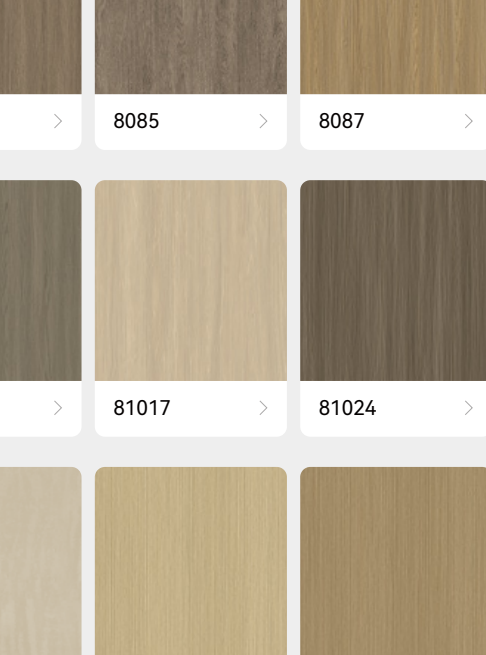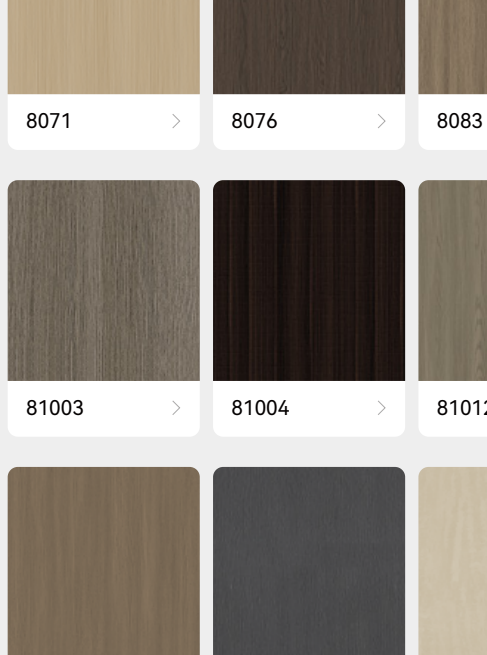

ENF

EP LEVEL

B1

FIRE RATING



WATERPROOF

BENDABLE

## MORE WOOD GRAIN COLORS



## INTERNATIONAL CERTIFICATION

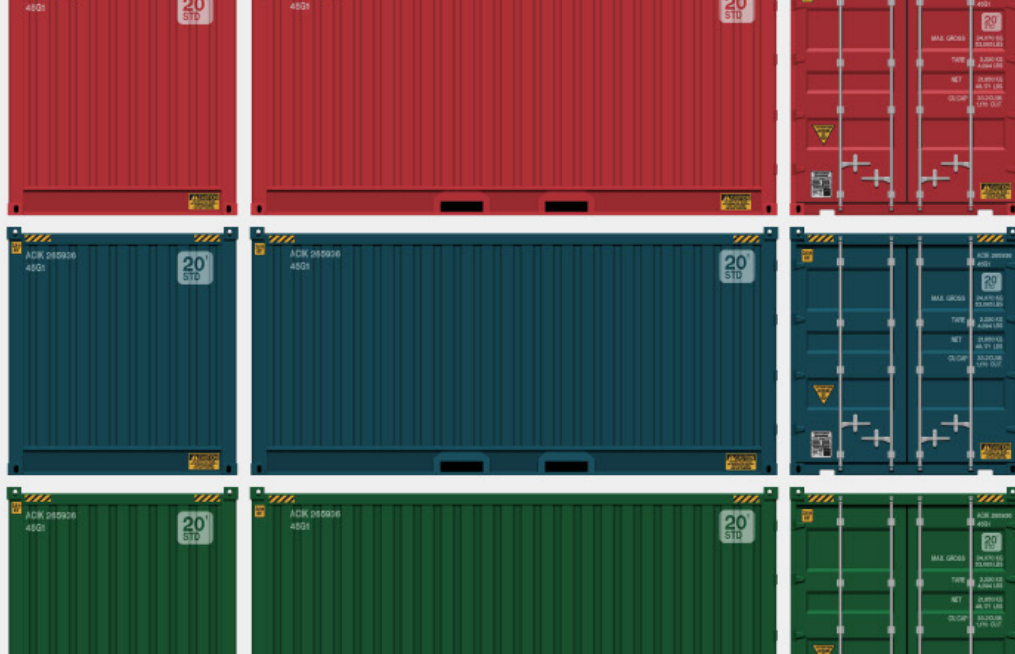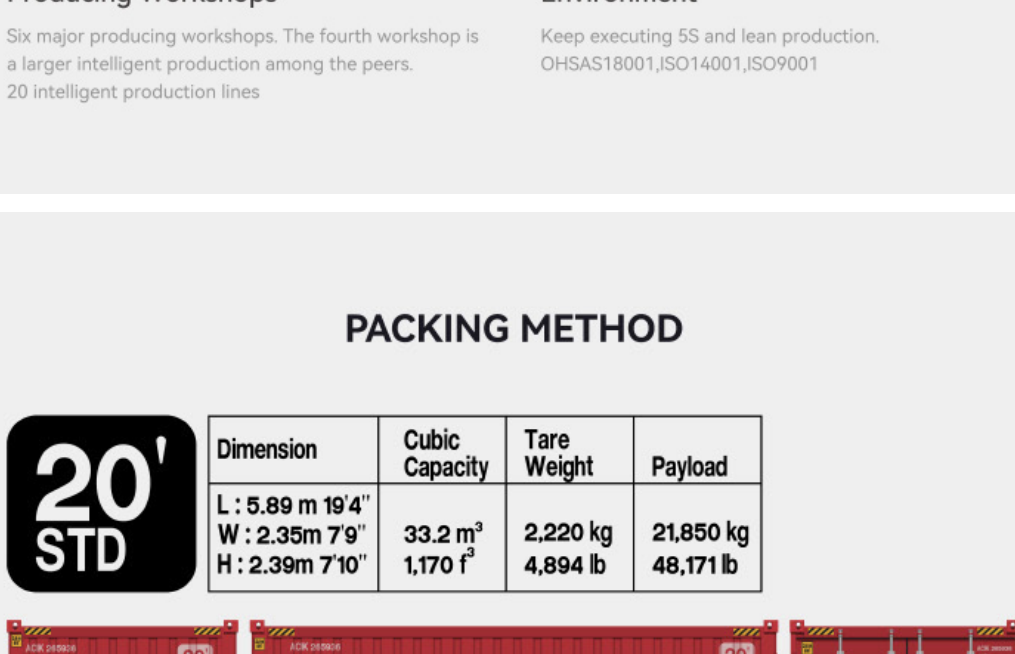


## FACTORY STRENGTH



- Mature Technology**
1. Standardized, automated technology design
  2. Real-time monitoring
  3. PLC online control
  4. 6.0 analysis




- Equipment Operation**
1. Famous brands, professional maintenance
  2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

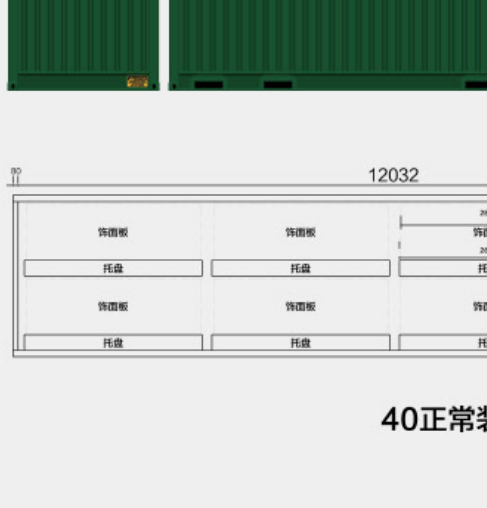

**Producing Workshops**

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines

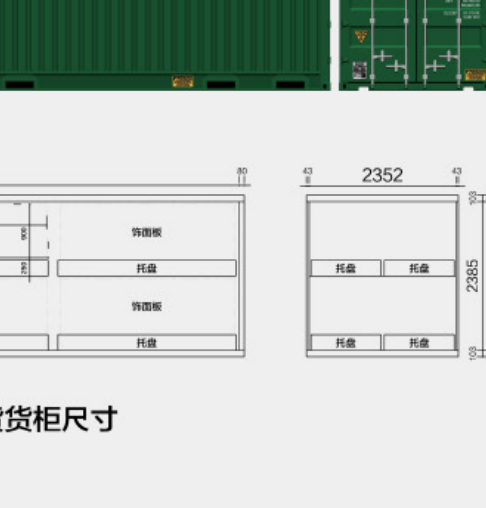

**Environment**

Keep executing 5S and lean production.

OHSAS18001, ISO14001, ISO9001

## PACKING METHOD



## 20' 正常装货货柜尺寸



## 40' 正常装货货柜尺寸