


8067

COLOR NUMBER



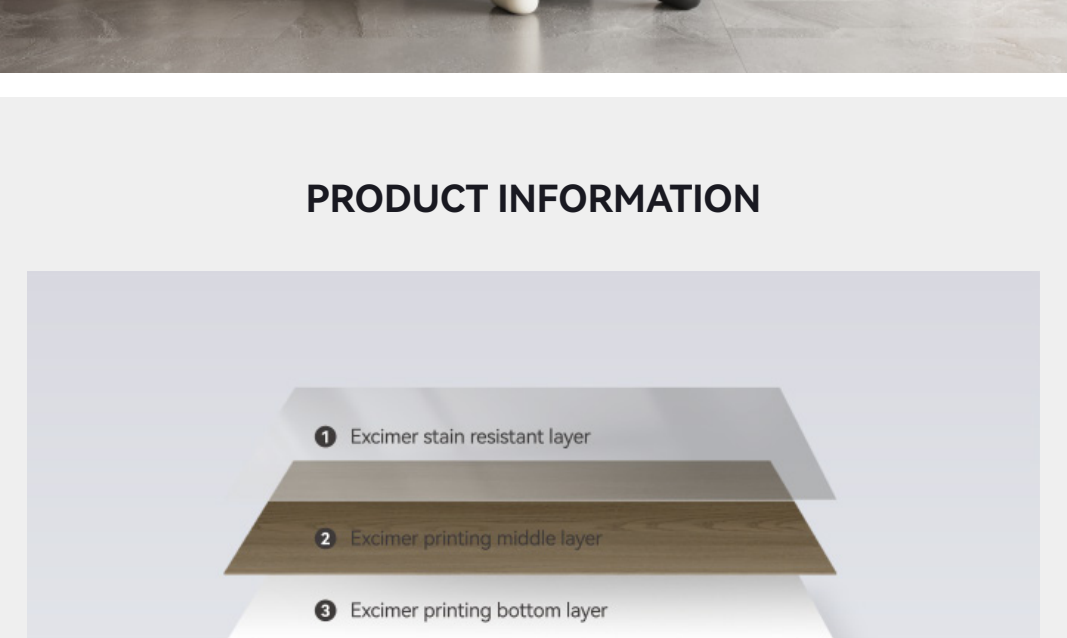


PRODUCT INFORMATION

- 1 Excimer stain resistant layer
- 2 Excimer printing middle layer
- 3 Excimer printing bottom layer
- 4 Imported no granular PUR layer
- 5 High strength crystal coextruded layer 1mm
- 6 Bamboo charcoal fiber layer 3mm/6mm
- 7 High strength crystal coextruded layer 1mm

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

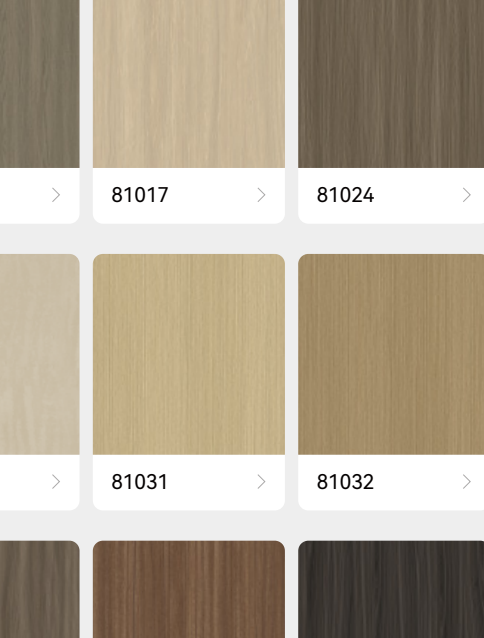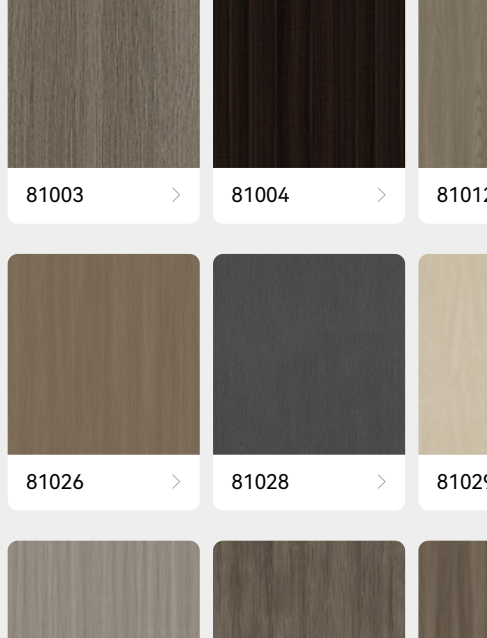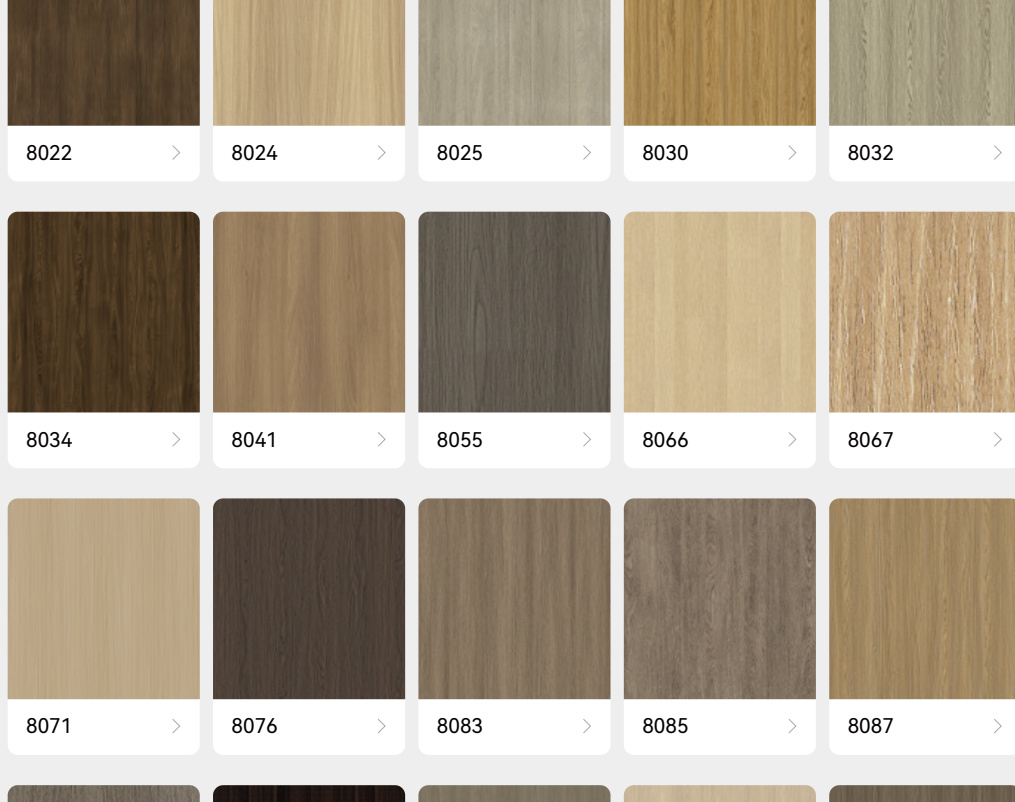

ENF

EP LEVEL


B1

FIRE RATING


WATERPROOF

BENDABLE



MORE WOOD GRAIN COLORS

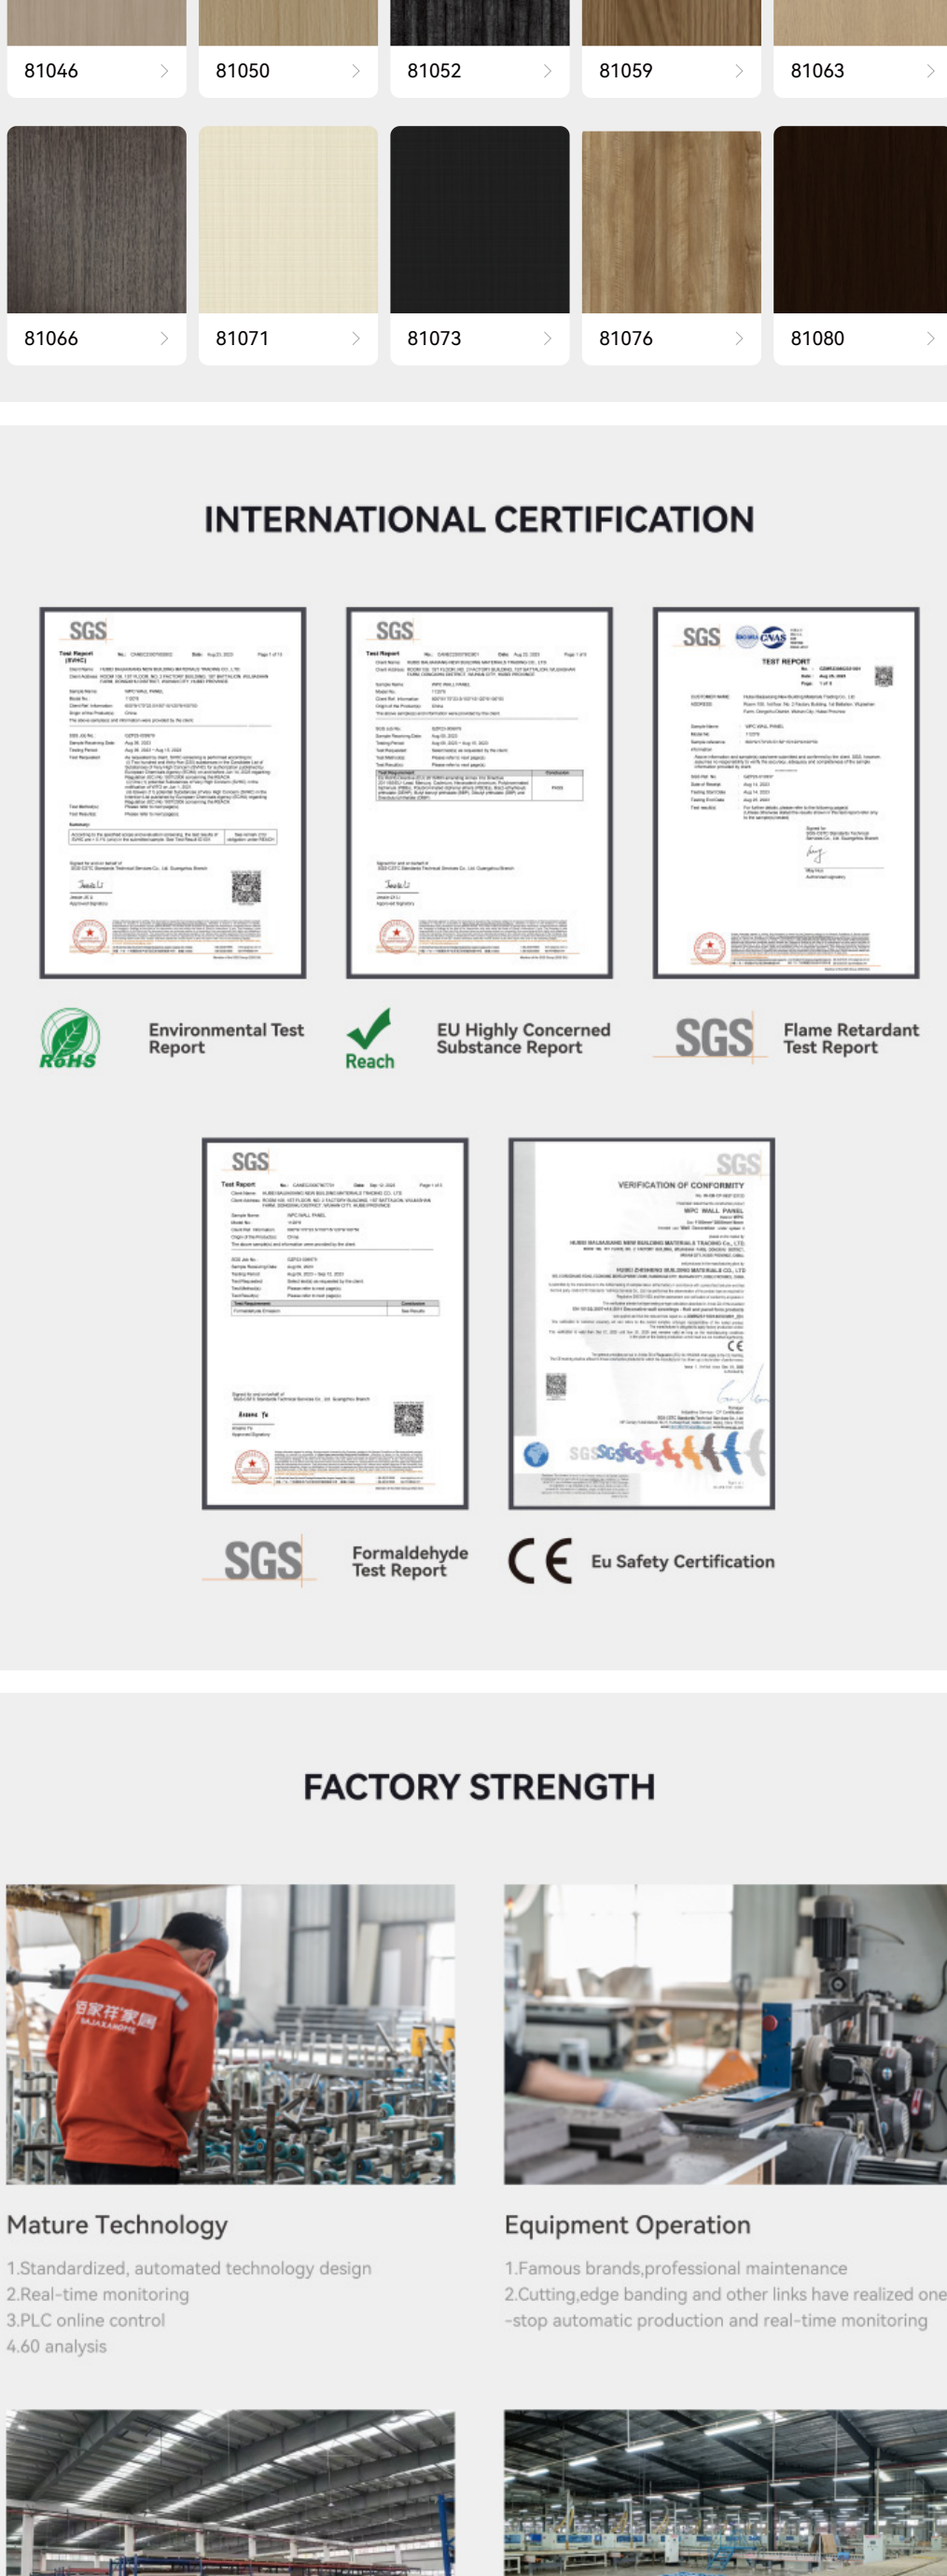

INTERNATIONAL CERTIFICATION

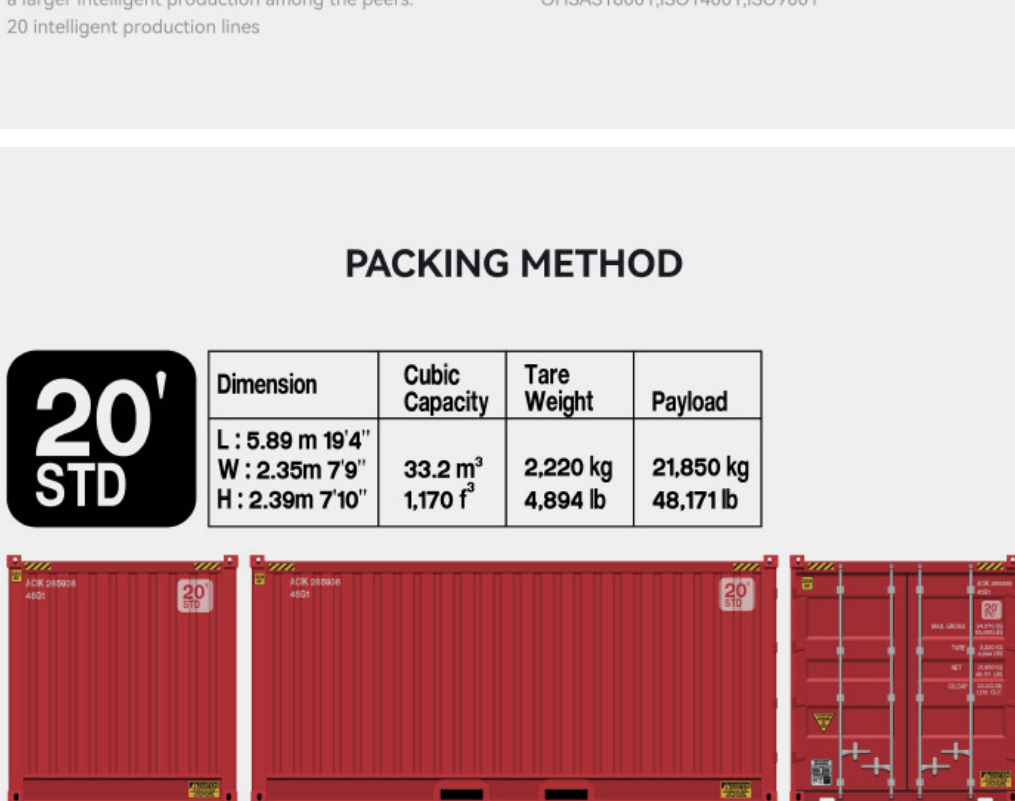

FACTORY STRENGTH

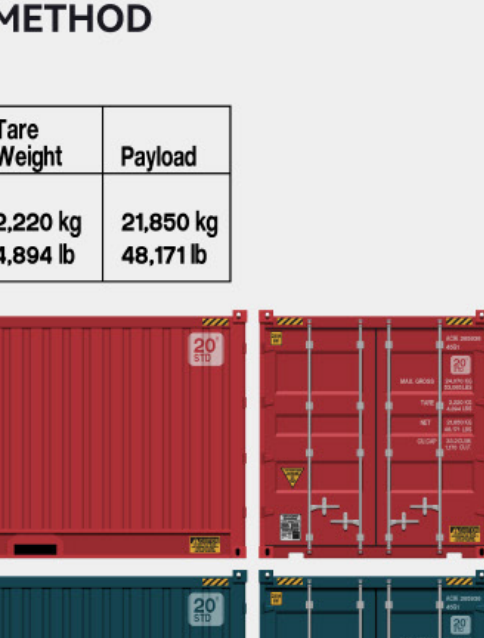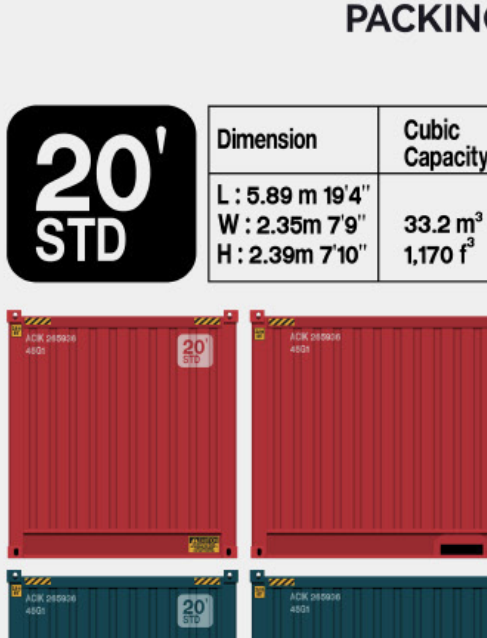


Mature Technology

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 60 analysis

Equipment Operation

1. Famous brands, professional maintenance
2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

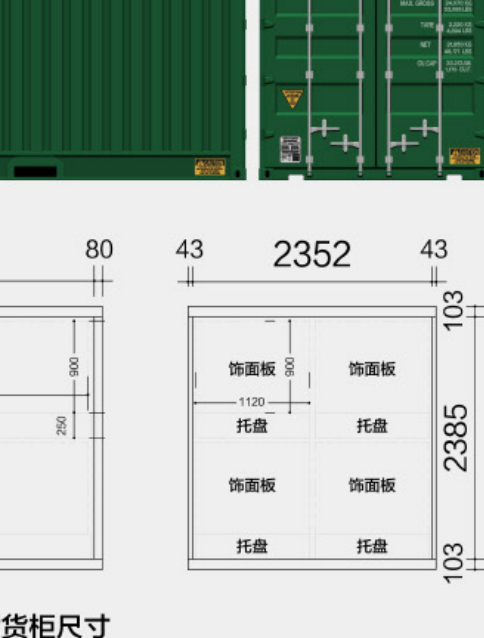

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines

Environment

Keep executing 5S and lean production.

OHSAS18001, ISO14001, ISO9001

PACKING METHOD

