

FW Test Report


Generated on: 2026-06-28 17:07:07

MCU: **stm32f103**

Tested Peripherals

#	Peripheral	Sensor	Port	Pin
1	spi1	LOGGER_SPI		
2	gpio	CS	gpioPortB	6

System Diagram

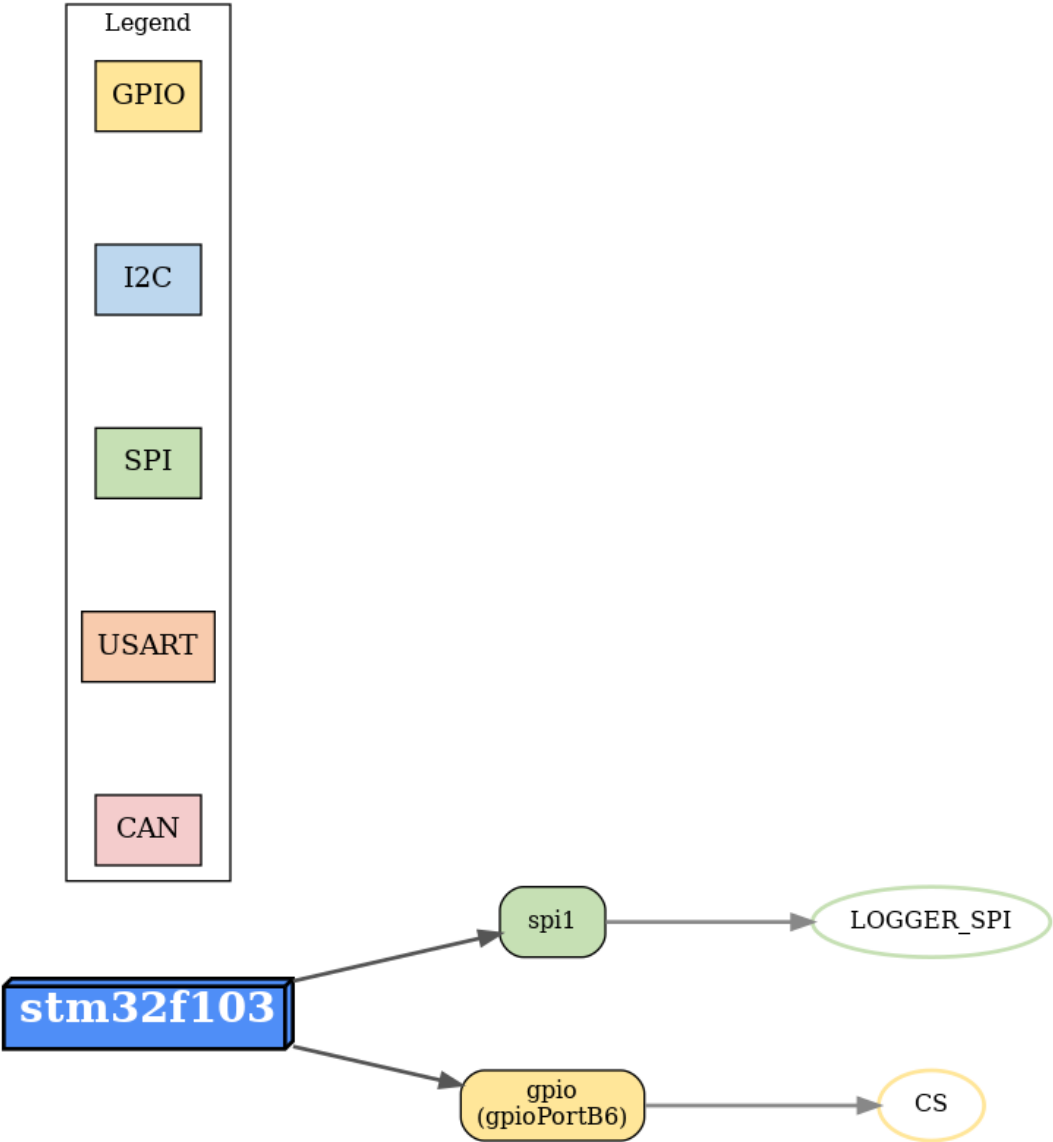

Logs

```
17:06:40.8317 [INFO] System bus created.
17:06:41.5182 [INFO] Reading cache
17:06:41.7407 [INFO] sysbus: Loaded SVD: /tmp/renode-8727/2ded99f7-c589-47df-b2ea-e3aa4ba02d51.tmp.
Name: STM32F103. Description: STM32F103.
17:06:42.1126 [INFO] machine-0: CPUs: ["machine-0.cpu"] were added to a new GDB server created on
port :3333
17:06:42.1127 [INFO] machine-0: GDB server with all CPUs started on port :3333
17:06:42.2541 [INFO] sysbus: Loading block of 9404 bytes length at 0x8000000.
17:06:42.2767 [INFO] sysbus: Loading block of 204 bytes length at 0x80024BC.
17:06:42.2768 [INFO] sysbus: Loading block of 1540 bytes length at 0x80024C8.
17:06:42.4877 [INFO] cpu: Guessing VectorTableOffset value to be 0x8000000.
17:06:42.4906 [INFO] cpu: Setting initial values: PC = 0x8002425, SP = 0x20005000.
17:06:42.4929 [INFO] machine-0: Machine started.
17:06:42.5512 [WARNING] sysbus: [cpu: 0x8000706] ReadDoubleWord from an unimplemented register
FLASH:ACR (0x40022000), returning a value from SVD: 0x30
17:06:42.5531 [WARNING] sysbus: [cpu: 0x800070E] WriteDoubleWord of value 0x30 to an unimplemented
register FLASH:ACR (0x40022000) generated from SVD
17:06:42.5702 [WARNING] sysbus: [cpu: 0x80006D4] ReadDoubleWord from an unimplemented register
AFIO:MAPR (0x40010004), returning a value from SVD: 0x0
17:06:42.5702 [WARNING] sysbus: [cpu: 0x80006EC] WriteDoubleWord of value 0x4000000 to an
unimplemented register AFIO:MAPR (0x40010004) generated from SVD
17:06:42.5717 [WARNING] sysbus: [cpu: 0x8000D26] ReadDoubleWord from an unimplemented register
FLASH:ACR (0x40022000), returning a value from SVD: 0x30
17:06:42.5733 [WARNING] sysbus: [cpu: 0x8000E32] ReadDoubleWord from an unimplemented register
FLASH:ACR (0x40022000), returning a value from SVD: 0x30
17:06:42.5747 [WARNING] gpioPortB: Trying to set the state of the input pin #6
17:06:42.5747 [WARNING] gpioPortB: Trying to set the state of the input pin #13
17:06:42.5748 [WARNING] gpioPortB: Trying to set the state of the input pin #14
17:06:42.5748 [WARNING] gpioPortB: Trying to set the state of the input pin #15
17:06:42.5780 [WARNING] sysbus: [cpu: 0x8001338] ReadDoubleWord from an unimplemented register
AFIO:EXTICR2 (0x4001000C), returning a value from SVD: 0x0
17:06:42.5780 [WARNING] sysbus: [cpu: 0x80013A0] WriteDoubleWord of value 0x0 to an unimplemented
register AFIO:EXTICR2 (0x4001000C) generated from SVD
17:06:42.5825 [WARNING] gpioPortB: Unhandled write to offset 0x0. Unhandled bits: [26] when
writing value 0x42444444. Tags: CNF6 (0x0).
17:06:42.5826 [WARNING] gpioPortB: Unhandled write to offset 0x4. Unhandled bits: [22] when
writing value 0x44244444. Tags: CNF13 (0x0).
17:06:42.5826 [WARNING] gpioPortB: Unhandled write to offset 0x4. Unhandled bits: [26] when
writing value 0x42644444. Tags: CNF14 (0x0).
17:06:42.5827 [WARNING] gpioPortB: Unhandled write to offset 0x4. Unhandled bits: [30] when
writing value 0x26644444. Tags: CNF15 (0x0).
17:06:42.5844 [WARNING] gpioPortB: Unhandled write to offset 0x0. Unhandled bits: [14-15] when
writing value 0x4644B444. Tags: CNF3 (0x2).
17:06:42.5844 [WARNING] gpioPortB: Unhandled write to offset 0x0. Unhandled bits: [22-23] when
writing value 0x46B47444. Tags: CNF5 (0x2).
17:06:42.5844 [WARNING] sysbus: [cpu: 0x8000522] ReadDoubleWord from an unimplemented register
AFIO:MAPR (0x40010004), returning a value from SVD: 0x0
17:06:42.5845 [WARNING] sysbus: [cpu: 0x800053A] WriteDoubleWord of value 0x7000001 to an
unimplemented register AFIO:MAPR (0x40010004) generated from SVD
17:06:42.5847 [WARNING] spi1: Slave mode is not supported
17:06:42.5857 [WARNING] gpioPortB: Unhandled write to offset 0x4. Unhandled bits: [10-11] when
writing value 0x66644B44. Tags: CNF10 (0x2).
17:06:42.5880 [WARNING] usart3: Unhandled read from offset 0x14.
17:06:42.5881 [WARNING] usart3: Unhandled write to offset 0x14, value 0x0.
17:06:42.5885 [WARNING] usart3: Unhandled read from offset 0x14.
17:06:42.5886 [WARNING] usart3: Unhandled write to offset 0x14, value 0x0.
17:06:42.5907 [INFO] spi1.LOGGER_SPI1: SPI byte received: 0xAB
17:06:42.5931 [INFO] spi1.LOGGER_SPI1: SPI byte received: 0x00
17:06:42.5932 [INFO] spi1.LOGGER_SPI1: SPI byte received: 0x00
17:06:42.5932 [INFO] spi1.LOGGER_SPI1: SPI byte received: 0x00
17:06:42.5935 [NOISY] gpioPortB.CS1: Device Deactivated (CS High)
17:06:42.5936 [NOISY] gpioPortB.CS1: Device Activated (CS Low)
```

17:06:42.5940 [INFO] spi1.LOGGER_SPI1: SPI byte received: 0x05
17:06:42.5940 [INFO] spi1.LOGGER_SPI1: SPI byte received: 0x00
17:06:42.5940 [NOISY] gpioPortB.CS1: Device Dectivated (CS High)
17:06:42.5942 [NOISY] gpioPortB.CS1: Device Activated (CS Low)
17:06:42.5943 [INFO] spi1.LOGGER_SPI1: SPI byte received: 0x06
17:06:42.5943 [NOISY] gpioPortB.CS1: Device Dectivated (CS High)
17:06:48.7019 [WARNING] sysbus: [cpu: 0x8000804] WriteDoubleWord to non existing peripheral at 0xFFFFFFF4, value 0x40.
17:06:48.7019 [WARNING] sysbus: [cpu: 0x8000804] WriteDoubleWord to non existing peripheral at 0xFFFFFFF8, value 0x0.
17:06:48.7026 [WARNING] sysbus: [cpu: 0x8000658] WriteDoubleWord to non existing peripheral at 0xFFFFFFF4, value 0x0.

Customer Test Script

```
print("No custom command executed!")
```

Customer Test Logs

No custom command executed!