

FW Test Report


Generated on: 2026-06-26 15:37:44

MCU: **stm32l451**

Tested Peripherals

#	Peripheral	Sensor	Port	Pin
1	i2c1	LOGGER_I2C		
2	usart2	LOGGER_USART		

System Diagram

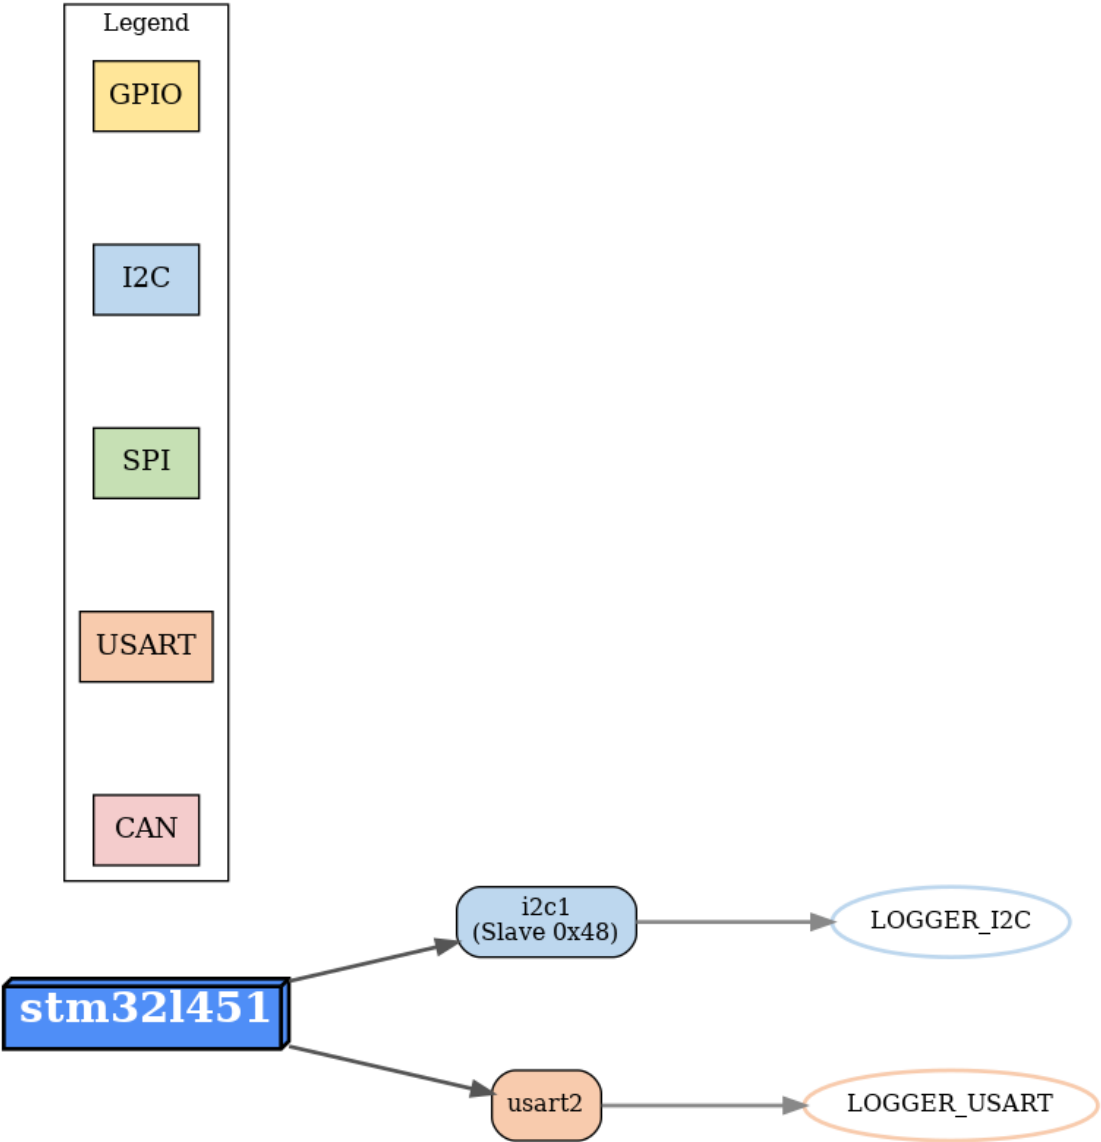

Logs

15:37:15.9075 [INFO] System bus created.
15:37:16.3868 [WARNING] Lptimer not passed in the RCC constructor. Changes to the low-power timer clock will be ignored
15:37:16.6203 [INFO] sysbus: Loaded SVD: /workspace/svds/stm32l451.svd. Name: STM32L451.
Description: STM32L451.
15:37:17.0542 [INFO] machine-0: CPUs: ["machine-0.cpu"] were added to a new GDB server created on port :3333
15:37:17.0543 [INFO] machine-0: GDB server with all CPUs started on port :3333
15:37:17.0672 [INFO] sysbus: Loading block of 89768 bytes length at 0x8000000.
15:37:17.0755 [INFO] sysbus: Loading block of 30424 bytes length at 0x8015EA8.
15:37:17.0755 [INFO] sysbus: Loading block of 1536 bytes length at 0x8016558.
15:37:17.0921 [INFO] cpu: Guessing VectorTableOffset value to be 0x8000000.
15:37:17.0943 [INFO] cpu: Setting initial values: PC = 0x80016F9, SP = 0x20020000.
15:37:17.0961 [INFO] machine-0: Machine started.
15:37:17.1375 [WARNING] sysbus: [cpu: 0x800C89A] (tag: 'PWR_CR1') ReadDoubleWord from non existing peripheral at 0x40007000, returning 0x00000F00.
15:37:17.1376 [WARNING] sysbus: [cpu: 0x800C8A8] (tag: 'PWR_CR1') ReadDoubleWord from non existing peripheral at 0x40007000, returning 0x00000F00.
15:37:17.1380 [WARNING] sysbus: [cpu: 0x800C8B4] WriteDoubleWord of value 0xB00 to an unimplemented register PWR:CR1 (0x40007000) generated from SVD
15:37:17.1384 [WARNING] sysbus: [cpu: 0x800C8D6] ReadDoubleWord from an unimplemented register PWR:SR2 (0x40007014), returning a value from SVD: 0x0
15:37:17.1385 [WARNING] sysbus: [cpu: 0x800C8EA] ReadDoubleWord from an unimplemented register PWR:SR2 (0x40007014), returning a value from SVD: 0x0
15:37:17.1385 [WARNING] sysbus: [cpu: 0x800C842] (tag: 'PWR_CR1') ReadDoubleWord from non existing peripheral at 0x40007000, returning 0x00000F00.
15:37:17.1385 [WARNING] sysbus: [cpu: 0x800C84A] WriteDoubleWord of value 0xF00 to an unimplemented register PWR:CR1 (0x40007000) generated from SVD
15:37:17.1393 [WARNING] sysbus: [cpu: 0x8009710] (tag: 'PWR_CR1') ReadDoubleWord from non existing peripheral at 0x40007000, returning 0x00000F00.
15:37:17.1459 [WARNING] sysbus: [cpu: 0x800B630] ReadDoubleWord from an unimplemented register SYSCFG:EXTICR4 (0x40010014), returning a value from SVD: 0x0
15:37:17.1459 [WARNING] sysbus: [cpu: 0x800B6C4] WriteDoubleWord of value 0x1 to an unimplemented register SYSCFG:EXTICR4 (0x40010014) generated from SVD
15:37:17.1460 [WARNING] sysbus: [cpu: 0x800B6CA] ReadDoubleWord from an unimplemented register EXTI:RTSR1 (0x40010408), returning a value from SVD: 0x0
15:37:17.1460 [WARNING] sysbus: [cpu: 0x800B6F0] WriteDoubleWord of value 0x1000 to an unimplemented register EXTI:RTSR1 (0x40010408) generated from SVD
15:37:17.1460 [WARNING] sysbus: [cpu: 0x800B6F4] ReadDoubleWord from an unimplemented register EXTI:FTSR1 (0x4001040C), returning a value from SVD: 0x0
15:37:17.1461 [WARNING] sysbus: [cpu: 0x800B71A] WriteDoubleWord of value 0x1000 to an unimplemented register EXTI:FTSR1 (0x4001040C) generated from SVD
15:37:17.1461 [WARNING] sysbus: [cpu: 0x800B71E] ReadDoubleWord from an unimplemented register EXTI:EMR1 (0x40010404), returning a value from SVD: 0x0
15:37:17.1461 [WARNING] sysbus: [cpu: 0x800B744] WriteDoubleWord of value 0x0 to an unimplemented register EXTI:EMR1 (0x40010404) generated from SVD
15:37:17.1461 [WARNING] sysbus: [cpu: 0x800B748] ReadDoubleWord from an unimplemented register EXTI:IMR1 (0x40010400), returning a value from SVD: 0xFF820000
15:37:17.1461 [WARNING] sysbus: [cpu: 0x800B76E] WriteDoubleWord of value 0xFF821000 to an unimplemented register EXTI:IMR1 (0x40010400) generated from SVD
15:37:17.1478 [WARNING] sysbus: [cpu: 0x800A306] (tag: 'PWR_CR1') ReadDoubleWord from non existing peripheral at 0x40007000, returning 0x00000F00.
15:37:17.1478 [WARNING] sysbus: [cpu: 0x800A30E] WriteDoubleWord of value 0xF00 to an unimplemented register PWR:CR1 (0x40007000) generated from SVD
15:37:17.1478 [WARNING] sysbus: [cpu: 0x800A32E] (tag: 'PWR_CR1') ReadDoubleWord from non existing peripheral at 0x40007000, returning 0x00000F00.
15:37:17.1521 [WARNING] gpioB: Unhandled write to offset 0x4. Unhandled bits: [8] when writing value 0x100. Tags: OT8 (0x1).
15:37:17.1524 [WARNING] gpioB: Unhandled write to offset 0x4. Unhandled bits: [9] when writing value 0x200. Tags: OT9 (0x1).
15:37:17.1528 [WARNING] i2c1: Unhandled write to offset 0x10. Unhandled bits: [0, 7-8, 11, 13, 16, 20-23] when writing value 0xF12981. Tags: SCLL (0x81), SCLH (0x29), SDADEL (0x1), SCLDEL (0xF).

15:37:17.1530 [INFO] i2c1: Slave address 1: 0x0, mode: 7-bit, status: disabled
15:37:17.1531 [INFO] i2c1: Slave address 1: 0x0, mode: 7-bit, status: enabled
15:37:17.1534 [WARNING] i2c1: Unhandled write to offset 0x4. Unhandled bits: [15] when writing value 0x2008000. Tags: NACK (0x1).
15:37:17.1535 [INFO] i2c1: Slave address 2: 0x0, mask: 0x0, status: disabled
15:37:17.1539 [INFO] i2c1: Slave address 2: 0x0, mask: 0x0, status: disabled
15:37:17.1554 [WARNING] usart2: Unhandled write to offset 0x8. Unhandled bits: [14] when writing value 0x4000. Tags: DEM (0x1).
15:37:17.1554 [WARNING] usart2: Unhandled write to offset 0x0. Unhandled bits: [16-17, 21-22] when writing value 0x63000C. Tags: DEDT (0x3), DEAT (0x3).
15:37:17.1559 [WARNING] usart2: Unhandled write to offset 0x8. Unhandled bits: [0] when writing value 0x1. Tags: EIE (0x1).
15:37:17.1559 [WARNING] usart1: Unhandled write to offset 0x8. Unhandled bits: [0] when writing value 0x1. Tags: EIE (0x1).
15:37:17.1714 [WARNING] nvic: Trying to set the priority for interrupt 16 to 0xFF, but it should be maskable with 0xF0
15:37:22.0994 [WARNING] i2c1: Unknown slave at address 73.
15:37:22.1001 [WARNING] i2c1: Unknown slave at address 73. (2)
15:37:27.0990 [WARNING] i2c1: Unknown slave at address 73.
15:37:27.0998 [WARNING] i2c1: Unknown slave at address 73. (2)
15:37:28.4609 [WARNING] usart2: Unhandled write to offset 0x8. Unhandled bits: [0] when writing value 0x1. Tags: EIE (0x1).
15:37:28.4613 [WARNING] usart2: Unhandled write to offset 0x8. Unhandled bits: [0] when writing value 0x1. Tags: EIE (0x1).
15:37:28.4613 [WARNING] usart2: Unhandled write to offset 0x8. Unhandled bits: [0] when writing value 0x1. Tags: EIE (0x1).
15:37:28.4614 [WARNING] usart2: Unhandled write to offset 0x8. Unhandled bits: [0] when writing value 0x1. Tags: EIE (0x1).
15:37:28.4614 [WARNING] usart2: Unhandled write to offset 0x8. Unhandled bits: [0] when writing value 0x1. Tags: EIE (0x1).
15:37:28.4614 [WARNING] usart2: Unhandled write to offset 0x8. Unhandled bits: [0] when writing value 0x1. Tags: EIE (0x1).
15:37:28.4614 [WARNING] usart2: Unhandled write to offset 0x8. Unhandled bits: [0] when writing value 0x1. Tags: EIE (0x1).
15:37:28.4617 [WARNING] usart2: Unhandled write to offset 0x8. Unhandled bits: [0] when writing value 0x1. Tags: EIE (0x1).
15:37:28.6014 [INFO] usart2: [host: 11.65s (+11.65s)|virt: 11.5s (+11.5s)] [MDBS] data write by callback
15:37:28.6019 [INFO] usart2: [host: 11.65s (+0.63ms)|virt: 11.5s (+0.12ms)] data[0]: 0x1
15:37:28.6026 [INFO] usart2: [host: 11.65s (+0.65ms)|virt: 11.5s (+81.36µs)] [MDBS] Sending response: 01 06 04 02 00 01 E8 FA
15:37:28.6032 [INFO] usart2: [host: 11.65s (+0.6ms)|virt: 11.5s (+0.5ms)] MODE_RUNNING
15:37:32.0989 [WARNING] i2c1: Unknown slave at address 73.
15:37:32.0997 [INFO] usart2: [host: 15.15s (+3.5s)|virt: 15s (+3.5s)] Failed to read ADS channel 1
15:37:32.0997 [WARNING] i2c1: Unknown slave at address 73.
15:37:32.0999 [INFO] usart2: [host: 15.15s (+0.7ms)|virt: 15s (+0.4ms)] Failed to read ADS channel 1
15:37:32.1008 [INFO] usart2: [host: 15.15s (+0.83ms)|virt: 15s (+0.3ms)] Gas reading: 0.000000
15:37:32.1013 [INFO] usart2: [host: 15.15s (+0.52ms)|virt: 15s (+0.12ms)] Gas Raw reading: 0
15:37:32.1013 [WARNING] i2c1: Unknown slave at address 73.
15:37:32.1017 [INFO] usart2: [host: 15.15s (+0.38ms)|virt: 15s (+80.01µs)] Failed to read ADS channel 0
15:37:32.1024 [INFO] usart2: [host: 15.15s (+0.72ms)|virt: 15s (+0.3ms)] Temperature reading: 192.009995
15:37:37.0999 [WARNING] i2c1: Unknown slave at address 73.
15:37:37.1005 [INFO] usart2: [host: 20.15s (+5s)|virt: 20s (+5s)] Failed to read ADS channel 1
15:37:37.1008 [WARNING] i2c1: Unknown slave at address 73.
15:37:37.1011 [INFO] usart2: [host: 20.15s (+0.75ms)|virt: 20s (+0.3ms)] Failed to read ADS channel 1
15:37:37.1015 [INFO] usart2: [host: 20.15s (+0.46ms)|virt: 20s (+0.3ms)] Gas reading: 0.000000
15:37:37.1017 [INFO] usart2: [host: 20.15s (+0.34ms)|virt: 20s (+0.16ms)] Gas Raw reading: 0
15:37:37.1018 [WARNING] i2c1: Unknown slave at address 73.
15:37:37.1024 [INFO] usart2: [host: 20.15s (+0.63ms)|virt: 20s (+45.62µs)] Failed to read ADS channel 0
15:37:37.1031 [INFO] usart2: [host: 20.15s (+0.62ms)|virt: 20s (+0.39ms)] Temperature reading: 192.009995

Custom Logs

[TX] SET_LOG_DEBUG : 01 06 04 02 00 01 E8 FA
[RX] [MDBS] data write by callback
[RX] data[0]: 0x1
[RX] [MDBS] Sending response: 01 06 04 02 00 01 E8 FA
[RX] MODE_RUNNING
[RX] Failed to read ADS channel 1
[RX] Failed to read ADS channel 1
[RX] Gas reading: 0.000000
[RX] Gas Raw reading: 0
[RX] Failed to read ADS channel 0
[RX] Temperature reading: 192.009995
[RX] Failed to read ADS channel 1
[RX] Failed to read ADS channel 1
[RX] Gas reading: 0.000000
[RX] Gas Raw reading: 0
[RX] Failed to read ADS channel 0
[RX] Temperature reading: 192.009995
[RX] Failed to read ADS channel 1
[RX] Failed to read ADS channel 1
[RX] Gas reading: 0.000000
[RX] Gas Raw reading: 0
[RX] Failed to read ADS channel 0
[RX] Temperature reading: 192.009995