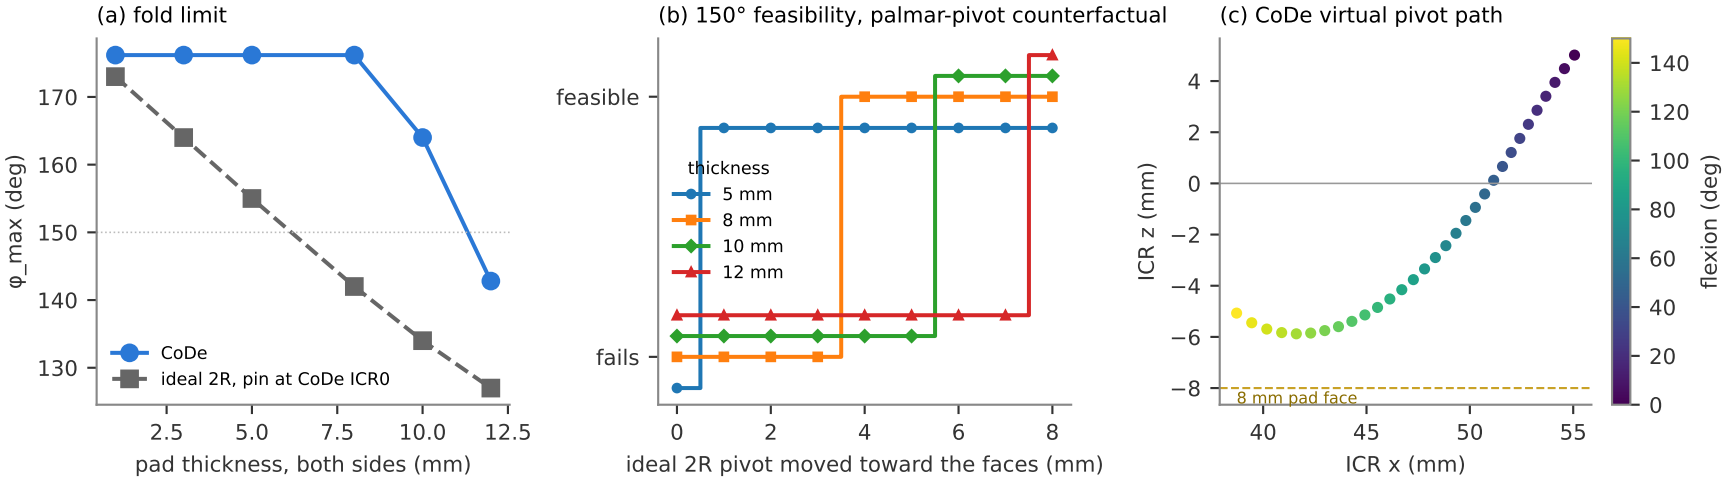
(a) fold limit
φ_max (deg)
170
160
150
140
130
CoDe
ideal 2R, pin at CoDe ICR0
2.5
5.0
7.5
10.0
12.5
pad thickness, both sides (mm)
(b) 150° feasibility, palmar-pivot counterfactual
feasible
fails
thickness
5 mm
8 mm
10 mm
12 mm
0
2
4
6
8
ideal 2R pivot moved toward the faces (mm)
(c) CoDe virtual pivot path
ICR z (mm)
4
2
0
−2
−4
−6
−8
8 mm pad face
40
45
50
55
ICR x (mm)
flexion (deg)
140
120
100
80
60
40
20
0