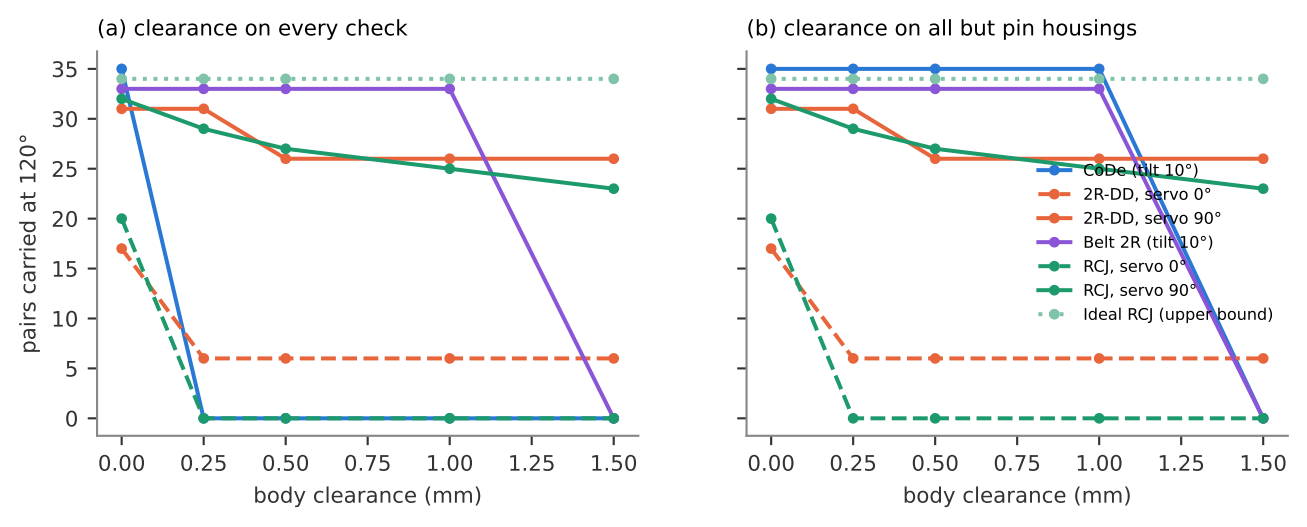
(a) clearance on every check
(b) clearance on all but pin housings
pairs carried at 120°
body clearance (mm)
0.00
0.25
0.50
0.75
1.00
1.25
1.50
0
5
10
15
20
25
30
35
CoDe (tilt 10°)
2R-DD, servo 0°
2R-DD, servo 90°
Belt 2R (tilt 10°)
RCJ, servo 0°
RCJ, servo 90°
Ideal RCJ (upper bound)