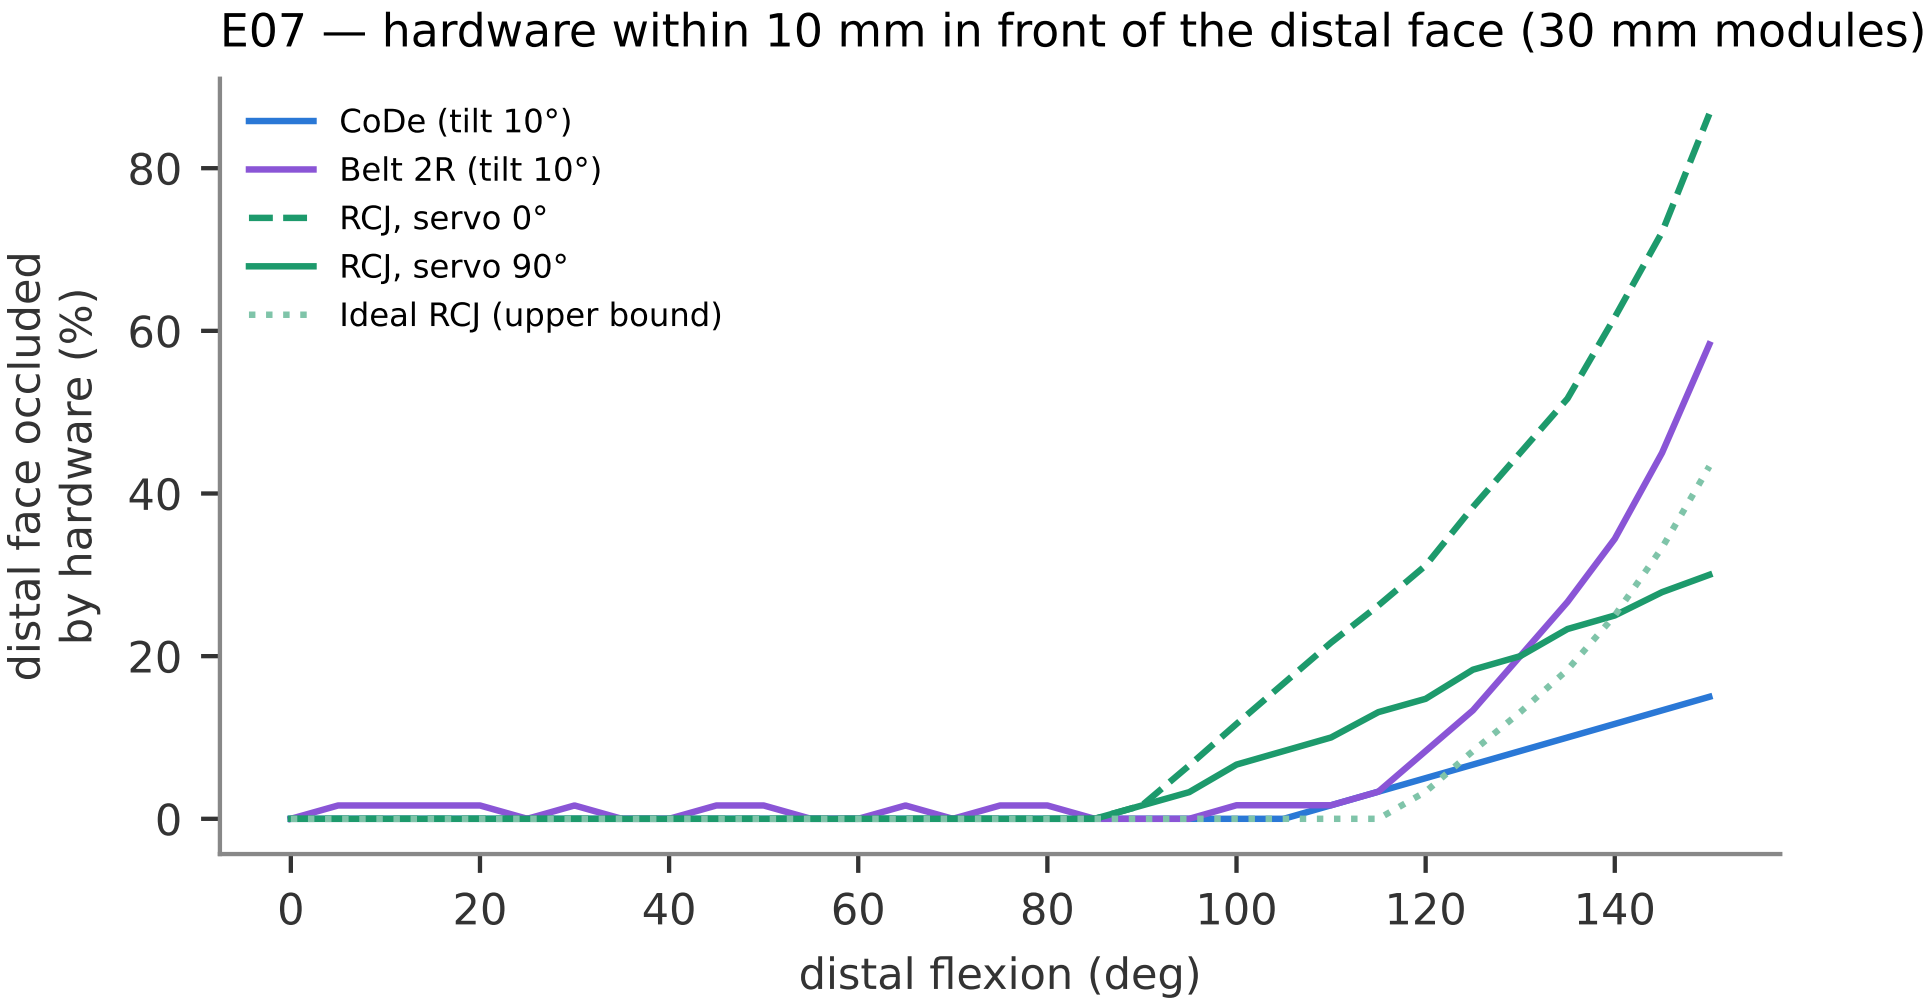
E07 — hardware within 10 mm in front of the distal face (30 mm modules)
CoDe (tilt 10°)
Belt 2R (tilt 10°)
RCJ, servo 0°
RCJ, servo 90°
Ideal RCJ (upper bound)
distal face occluded by hardware (%)
0
20
40
60
80
0
20
40
60
80
100
120
140
distal flexion (deg)