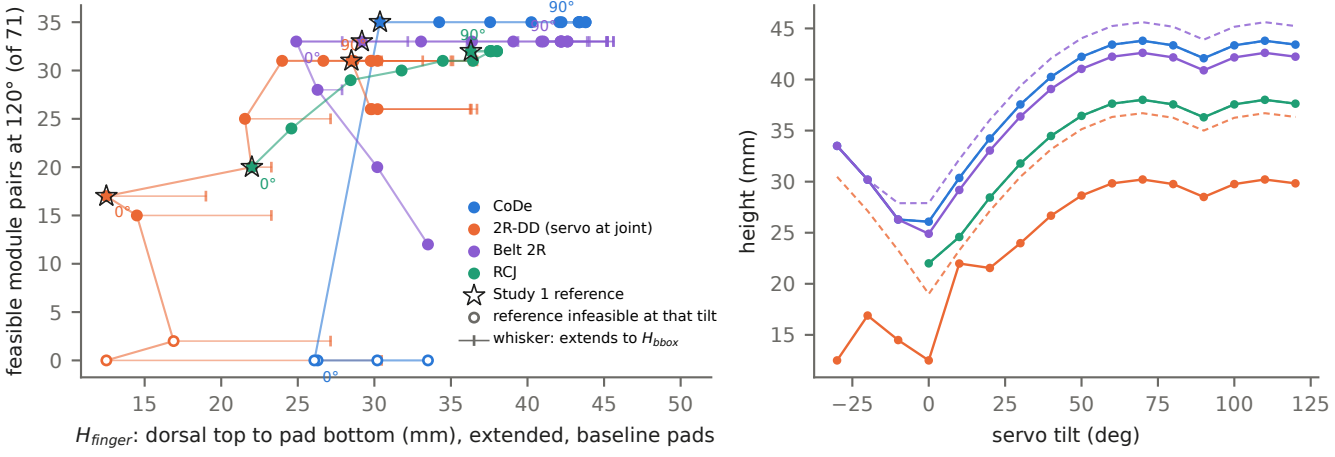
(a) accommodation vs. thickness across servo tilt
feasible module pairs at 120° (of 71)
H_{finger}: dorsal top to pad bottom (mm), extended, baseline pads
CoDe
2R-DD (servo at joint)
Belt 2R
RCJ
Study 1 reference
reference infeasible at that tilt
whisker: extends to H_{bbox}
90°
0°
(b) H_{finger} (solid) and H_{bbox} (dashed) vs. servo tilt
height (mm)
servo tilt (deg)