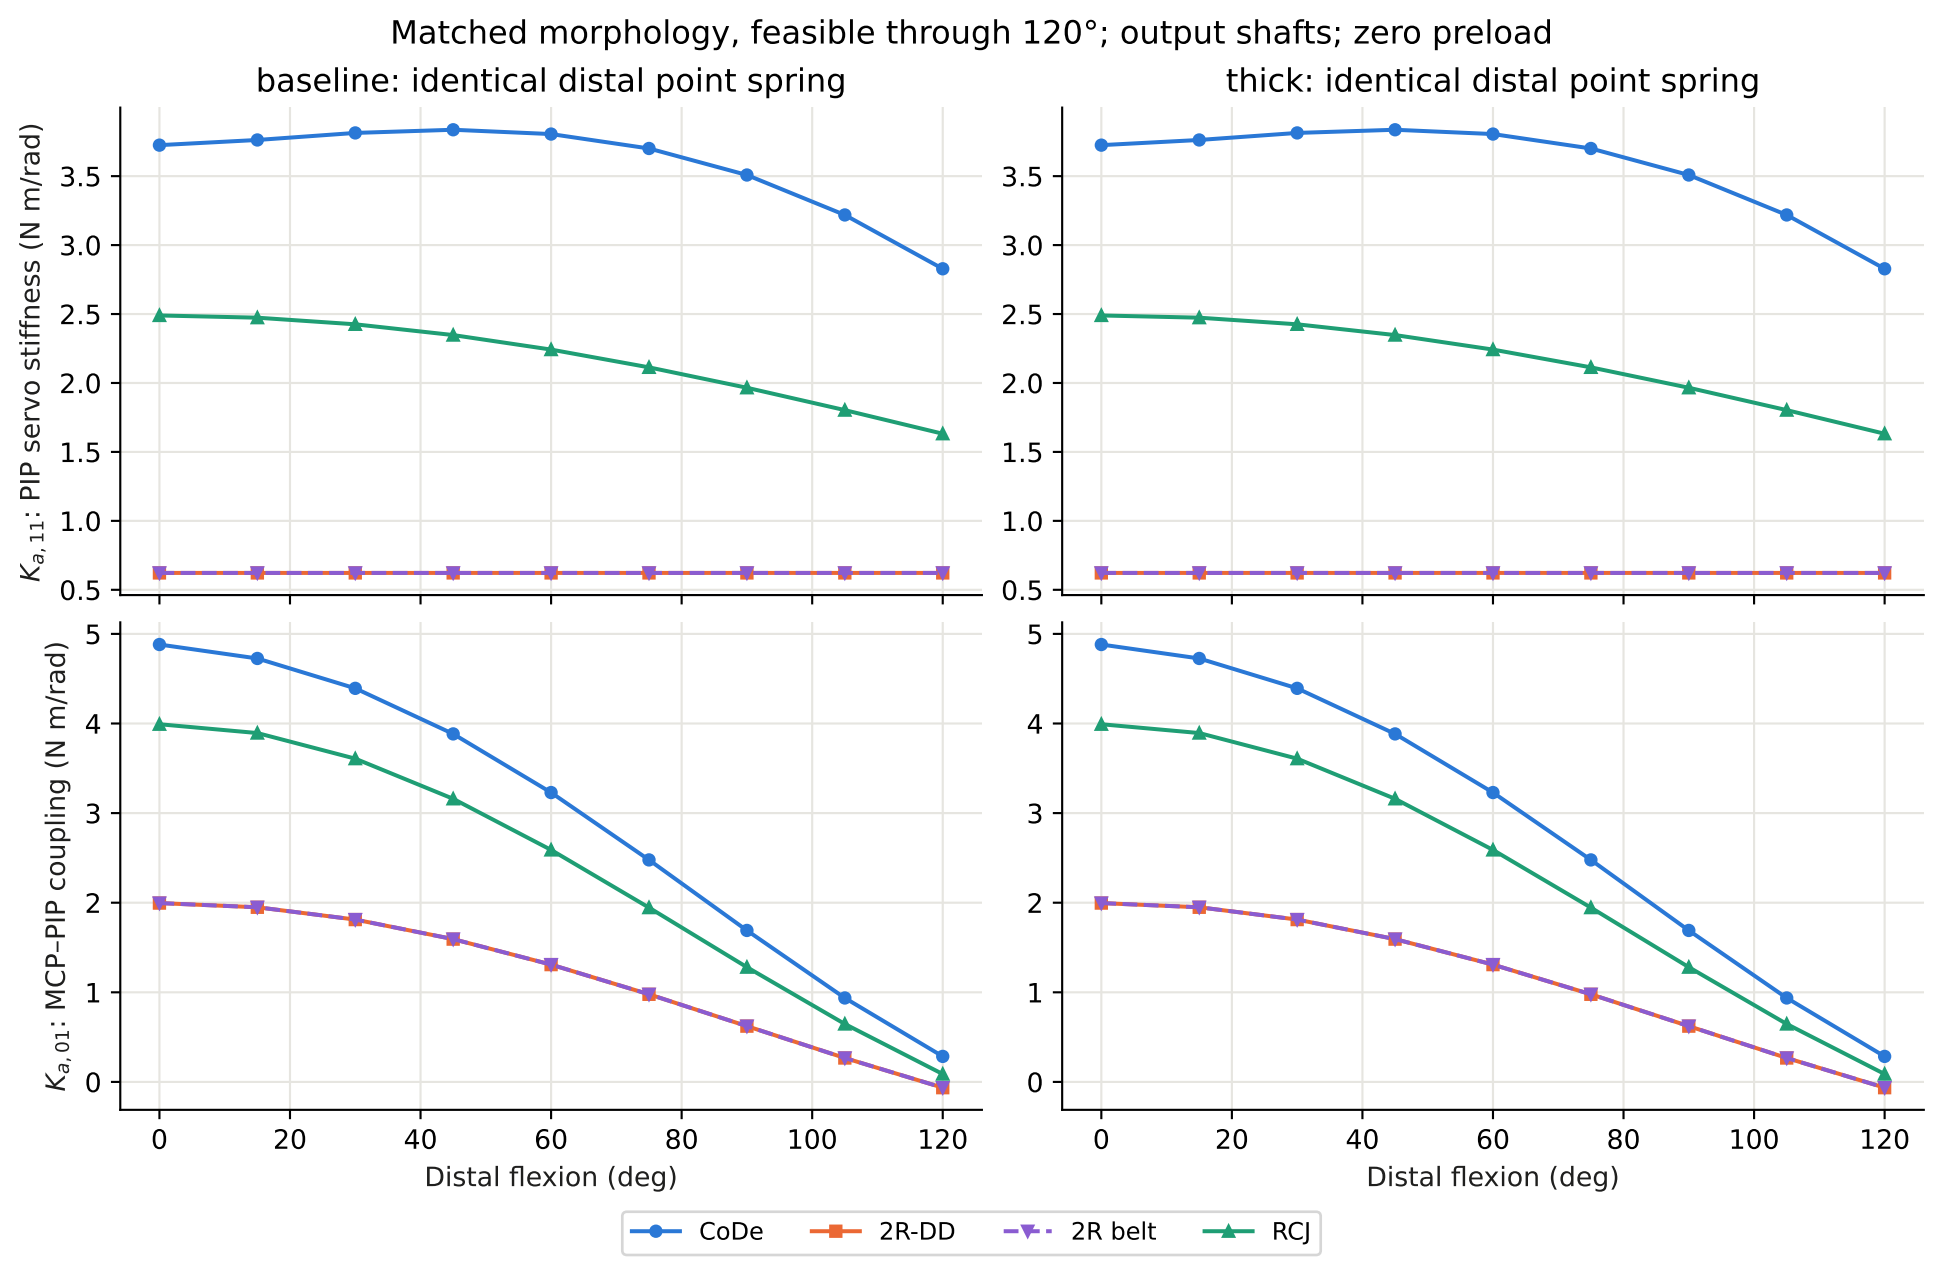
Matched morphology, feasible through 120°; output shafts; zero preload
baseline: identical distal point spring
thick: identical distal point spring
$K_{a,11}$: PIP servo stiffness (N m/rad)
$K_{a,01}$: MCP–PIP coupling (N m/rad)
Distal flexion (deg)
Distal flexion (deg)
CoDe
2R-DD
2R belt
RCJ