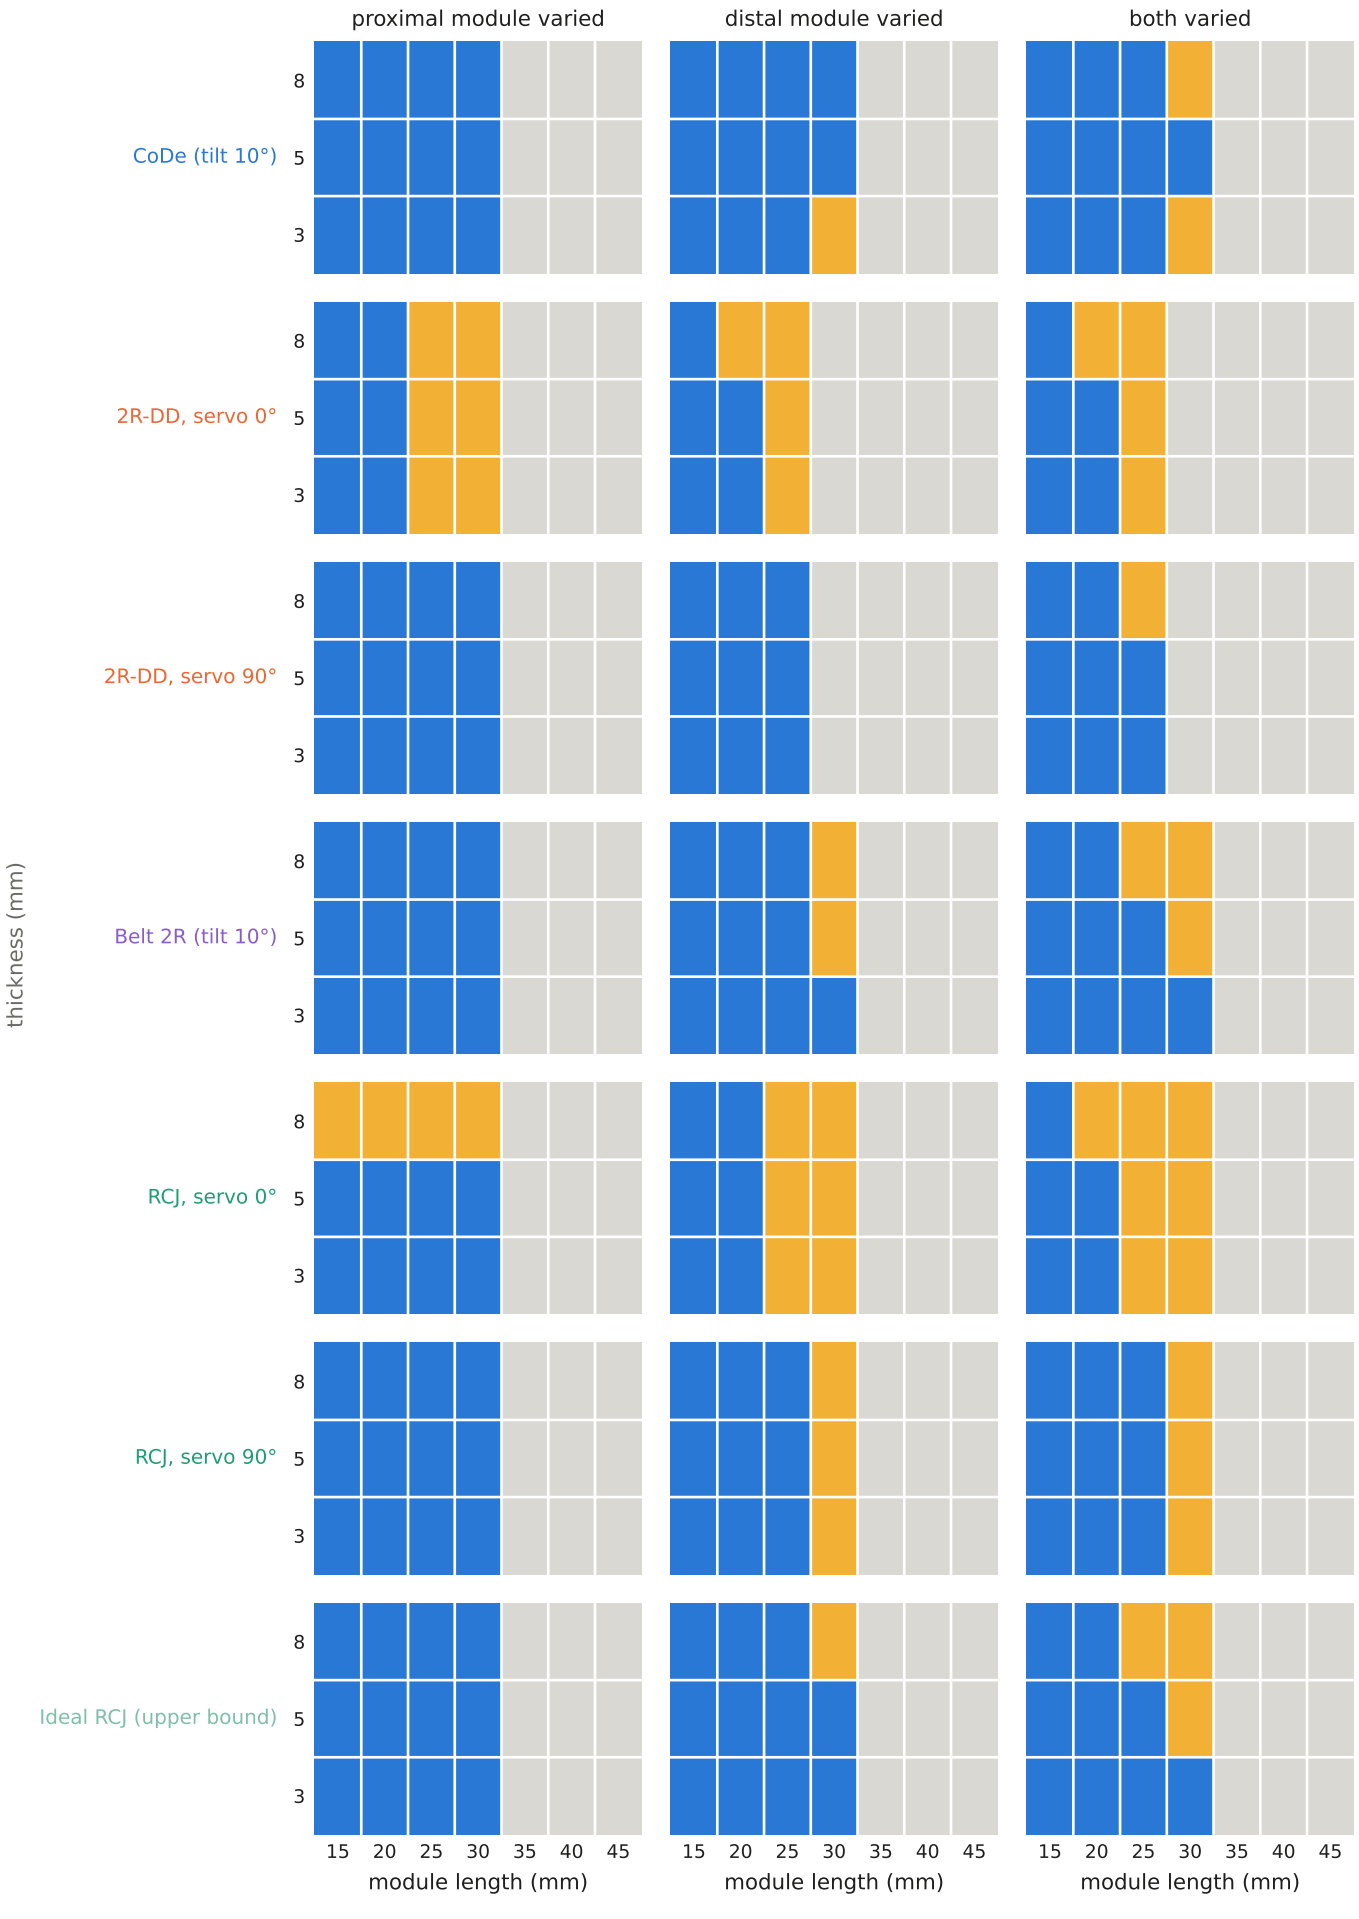
Study 1 — contact modules a frozen hand carries (φ_req = 120°; the other side 20 × 3 mm)
proximal module varied
distal module varied
both varied
CoDe (tilt 10°)
2R-DD, servo 0°
2R-DD, servo 90°
Belt 2R (tilt 10°)
RCJ, servo 0°
RCJ, servo 90°
Ideal RCJ (upper bound)
thickness (mm)
8
5
3
15 20 25 30 35 40 45
module length (mm)
carried to 120°
mounts, fails by 120°
does not mount