

EXP1272 Series - Small Size Batteries

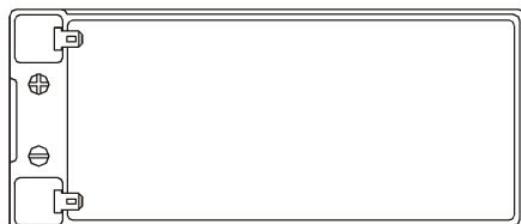
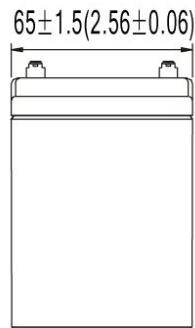
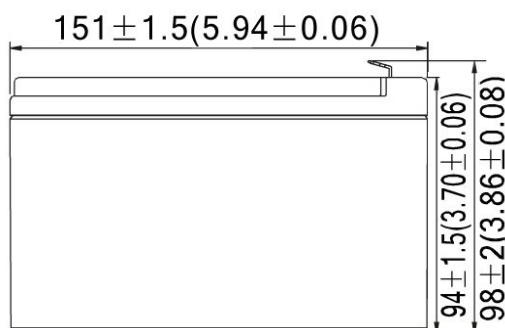
- 100% before shipment testing, stable and reliable long-term quality
- patented grid alloy formula and updated manufacturing technique
- completely sealed and maintenance-free, low self-discharge
- Excellent charging and re-charging acceptance
- Cycle use: More than 260 cycles at 100% DOD
- Floating & standby use: 3-5 years

Applications:

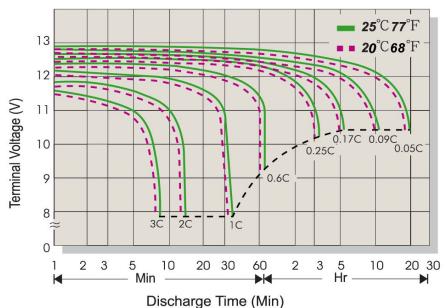
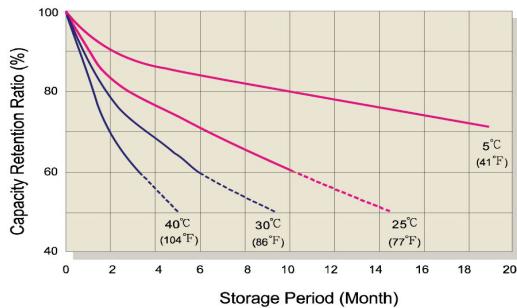
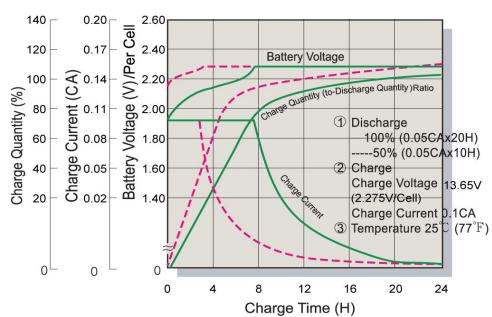
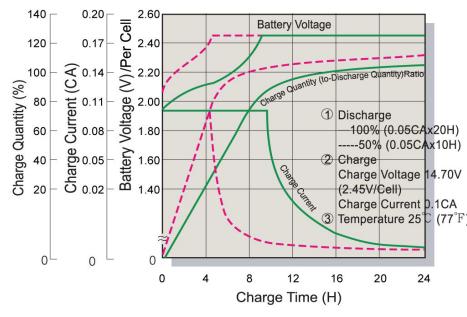
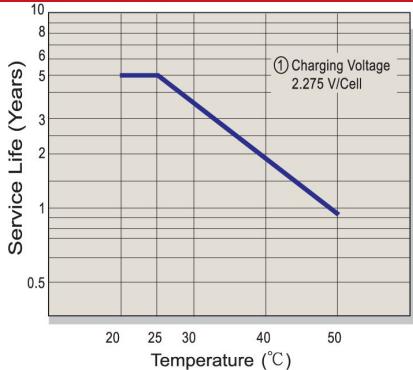
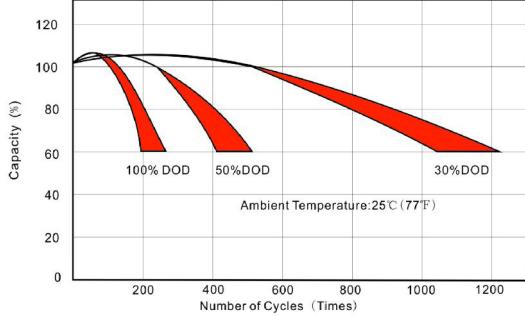
- | | |
|---------------------------|---------------------|
| ● Alarm System | ● Medical Equipment |
| ● Cable Television | ● UPS |
| ● Communication Equipment | ● Power tools |
| ● Emergency Power System | ● Control Equipment |
| ● Security System | ● Toys |

Construction:

- | | |
|-------------------------------|----------------------------------|
| ● ComponentRaw material | ● SealantEpoxy |
| ● PositiveLead dioxide | ● Safety valve Rubber |
| ● NegativeLead | ● TerminalCopper |
| ● ContainerABS | ● SeparatorFiber glass |
| ● CoverABS | ● ElectrolyteSulfuric acid |


F2 Terminal
Specifications:

Battery Model	EXP1272 12V7.2AH			
Designed Floating Life	3~5 Years			
Capacity (25°C)	20HR(0.36A,10.5V)	10HR(0.646A,10.5V)	5HR(1.188A,10.5V)	1HR(3.45A,10.5V)
	7.20AH	6.46AH	5.94AH	3.45AH
Dimensions	Length	Width	Height	Total Height
	151mm (5.94inch)	65mm (2.56inch)	94mm (3.70inch)	98mm (3.86inch)
Approx. Weight	2.10Kg ±5%			
Internal Resistance	Full charged at 25°C :≤35mΩ			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	14.4-15.0V(-30mV/°C), max. Current: 2.16A		13.6-13.8V (-20mV/°C)	

Terminal Voltage (V) and Discharge Time

Capacity Retention Characteristic

Battery Voltage and Charge Time for Standby Use

Battery Voltage and Charge Time for Cycle Use

Tickle (or Float) Service Life

Cycle Service Life

Constant Current Discharge(CC,Unit:A) at 25°C(77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	18.82	13.36	10.29	6.12	3.32	2.28	1.75	1.384	1.144	0.972	0.622	0.347
1.80V/Cell	19.18	13.62	10.49	6.24	3.39	2.32	1.78	1.411	1.166	0.991	0.634	0.353
1.75V/Cell	19.54	13.87	10.68	6.35	3.45	2.36	1.82	1.437	1.188	1.010	0.646	0.360
1.70V/Cell	21.30	14.70	11.32	6.61	3.51	2.41	1.85	1.463	1.209	1.027	0.657	0.366
1.67V/Cell	23.44	15.95	12.29	6.98	3.55	2.43	1.87	1.478	1.222	1.038	0.664	0.370
1.60V/Cell	22.37	15.88	12.23	7.27	3.59	2.46	1.89	1.494	1.235	1.050	0.671	0.374

Constant Power Discharge (CP,Unit:W) at 25°C(77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	36.69	23.75	20.06	11.93	6.48	4.44	3.41	2.70	2.23	1.90	1.21	0.68
1.80V/Cell	37.40	24.21	20.45	12.16	6.60	4.52	3.48	2.75	2.27	1.93	1.24	0.69
1.75V/Cell	38.10	24.66	20.83	12.39	6.73	4.61	3.54	2.80	2.32	1.97	1.26	0.70
1.70V/Cell	41.53	26.14	22.08	12.88	6.84	4.69	3.61	2.85	2.36	2.00	1.28	0.71
1.67V/Cell	45.72	28.36	23.96	13.60	6.92	4.74	3.65	2.88	2.38	2.02	1.30	0.72
1.60V/Cell	43.62	28.24	23.85	14.18	6.99	4.79	3.68	2.91	2.41	2.05	1.31	0.73