
Shea

Intriguing Transarency

ICE CREAM / GELATO DISPLAY

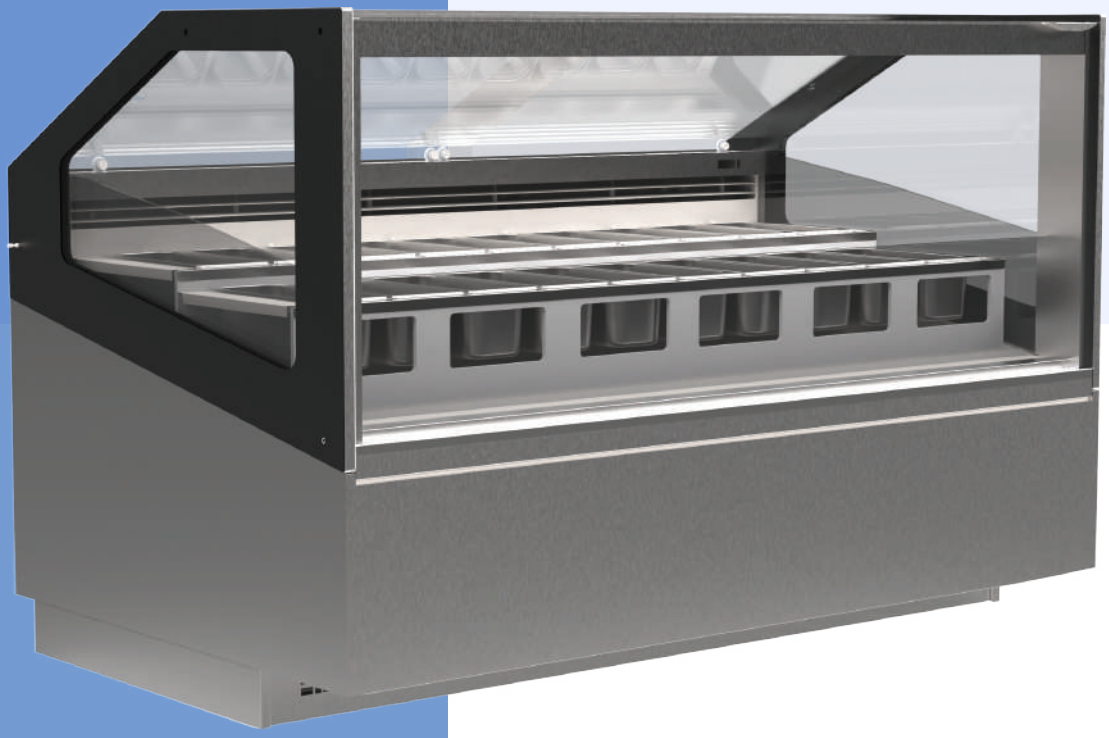

Ice Cream

Gelato

Williams

Display Cabinet


Crafted for Excellence

Linear Professional

Professional ice-cream display cases with unique design and high-level technical features, offering a wide range of product to suit your need. Multifunctional, adaptable and elegant ice-cream display cases, a perfect balance between aesthetics and functionality.

Features

- The frontal glass is associated with heater wires which avoids creation of fog.
- Polycarbonate sliding door. Possess brass handles and the doors slide very smoothly.
- The side glass is provided with silver and black colour options.
- Front decorative panel material is customizable on request.

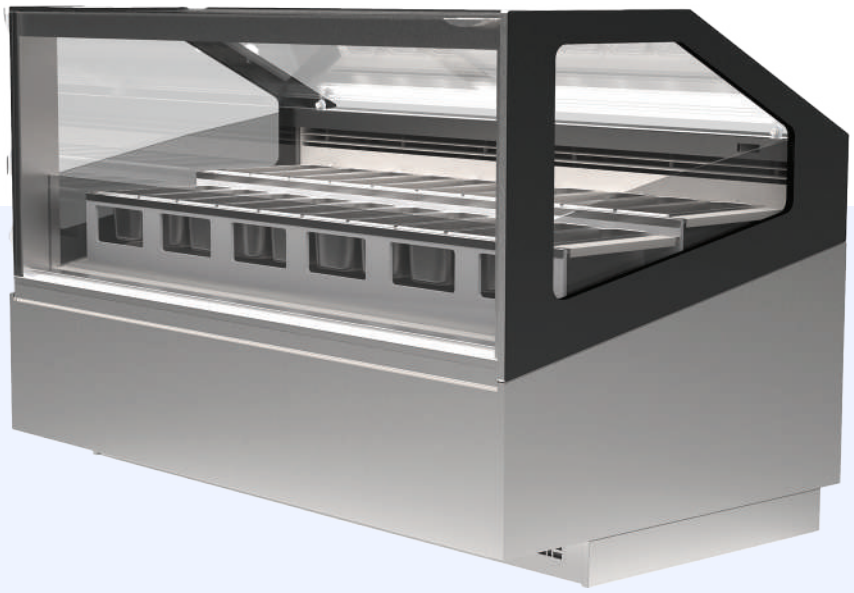

Williams refrigeration
ISO 9001:2015
IAF
UKAS UNITED KINGDOM ACCREDITATION SERVICE



- Hydraulic operated tilt forward glass is provided for easy cleaning of the display unit.

- The forward tilt open glass is supported by hydraulic piston which is embeded inside the which is embeded inside the display unit itself.

- Novel design of extrusion where dual LED strips are located at the top with optional white/neutral white colours.




- Dual LED provides enough light throw enhancing better displaying of the product.

- The display is available in various sizes of 4' (12 flavours), 5.3' (18 flavours) and 7' (24 flavours).

- Work top is made of corian material.

- Specially designed scoop washer is an optional feature which helps in washing ice cream scoops instantly.

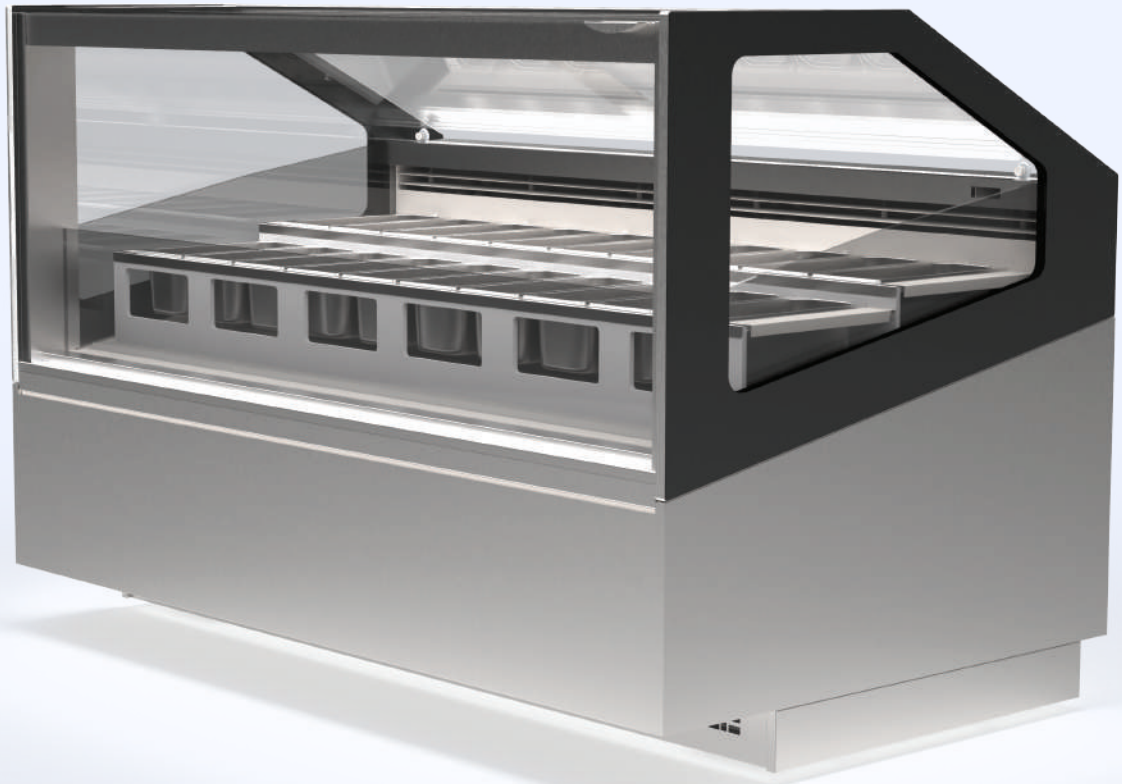


Key Features

- The system is sustainable that zero ODP refrigerants are used.
- Wide range: 12flv / 18flv / 24flv.
- Optimal cooling enhances the perfect preservation of the ice cream.
- European make compressor.
- AISI 304 food grade stainless steel with matte finish.
- Balanced, forced air refrigeration system enables rapid product pull down and even temperature throughout.
- Pull out refrigeration system for easy maintenance.

Technical Specifications

Model	Shea 3'6"	Shea 5'3"	Shea 7'
Temperature Range	-15°C to -21°C	-15°C to -21°C	-15°C to -21°C
Voltage / Frequency	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz
Power	1180W	1550W	2875W
Current	6A	7.9A	11.5A
No of GN pans	12	18	24
GN pan size	360x165x120mm	360x165x120mm	360x165x120mm
Refrigerant	R404A	R404A	R404A
Unit Dimension (WxDxH)	1120x1145x1275mm	1630x1145x1275mm	2140x1145x1275mm
Weight	230kg	320kg	422kg
No. of Sliding doors	2	2	2

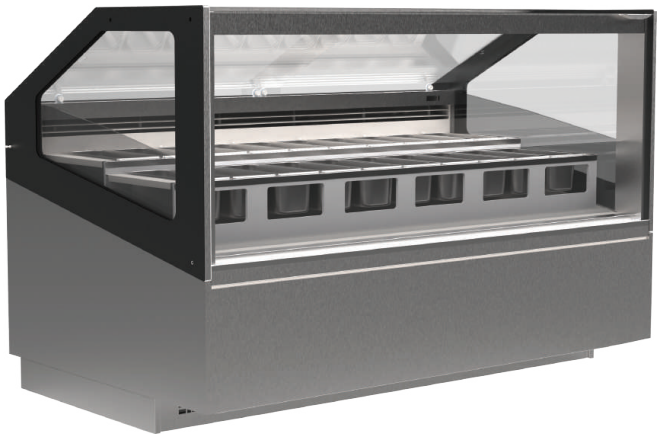

Williams Refrigeration

UNIT-I
111 ‘C’, KIADB Industrial Area
1st Phase, Bommasandra,Hosur Main Road,
Bangalore-560099, Karnataka, India.

UNIT-II
Plot No. 127&128, Bommasandra IV Phase,
Yarandahally,Bangalore-560099,
Karnataka, India.

+91-9844013768

sales@williamsrefrigeration.in
wsr@williamsrefrigeration.in

www.williamsrefrigeration.co.in