Banquet Trolleys



Williams
Banquet Trolleys
Built to Last



About us

Williams refrigeration has been an Indian expert for over two decades, serving the HORECA industry providing premium fabrication and refrigeration solutions adapting recent trends in design and utilizing advanced technology equipment.

We offer comprehensive solutions with durable fabrication and refrigeration customized to your pastry shops, ice cream shops, bars, breweries, restaurants and supermarkets.

We align closely with our customer's requirements by delivering environment friendly products alongside exceptional service. Our foremost priority is continuous innovation, integrating novel technologies into our product line.

ISO 9001:2015 IAF UKAS

Banquet trolleys

The Banquet trolleys are refrigerated / heated appliances designed to carry the food and other beverages from kitchen which are to be served in a banquet area. Both refrigerated and heated models are available for the same cabinet dimension. Banquet trolleys are available in single,double door variants. This equipment is completely made of AISI304 food-grade stainless steel interior and exterior with PU foam thermal insulation.

Digital controller

Precise control and display of the temperature of the food items.

Anti – tilt tray slides

The anti-tilt tray slides are easy to remove and clean and also avoids tipping.

Forced air circulation system

Aids in quick and even circulation of cool air / hot air.

Caster wheels

Provides flexibility and mobility.

Ventilation

Adequate ventilation is provided for the effective functioning of the refrigeration system.



Removable and washable gasket

Prevents the infiltration of outside air into the refrigerated space.

105° door opening

This helps during loading and stock verification.

Humidifier tank (only for heated model)

A small tank with heater immersed in water is provided to maintain the humidity in the cabinet.

Mullion heater

Helps in preventing harmful dirt traps due to condensation.

Product Code



W B 101 C

Company Name
W - Williams Refrigeration

Product Name
B - Banquet Trolleys

Process
C - Cold
H - Hot

No. of Doors
101 - 1 Door
201 - 2 Doors



WB101C REFRIGERATED



WB201C REFRIGERATED




WB101H HEATED



WB201H HEATED

Standard Features

- Door locks provide added security.
- High-quality washable **magnetic door gasket.** (for refrigerated model)
- **Silicon door** gasket for heated model.
- Easy to use microprocessor control with digital display for easy visual reference.
- Stainless steel interior & exterior finish.
- Removable **anti-tilt tray** slides to prevent tipping.
- For the heated model separate humidifier tank is provided which maintains the required humidity in the cabinet.
- **Efficient and durable** compressor.
- **Automatic defrost** ensures the evaporator working to its optimum performance.
- Designed and engineered to operate up to **43° C ambient.**

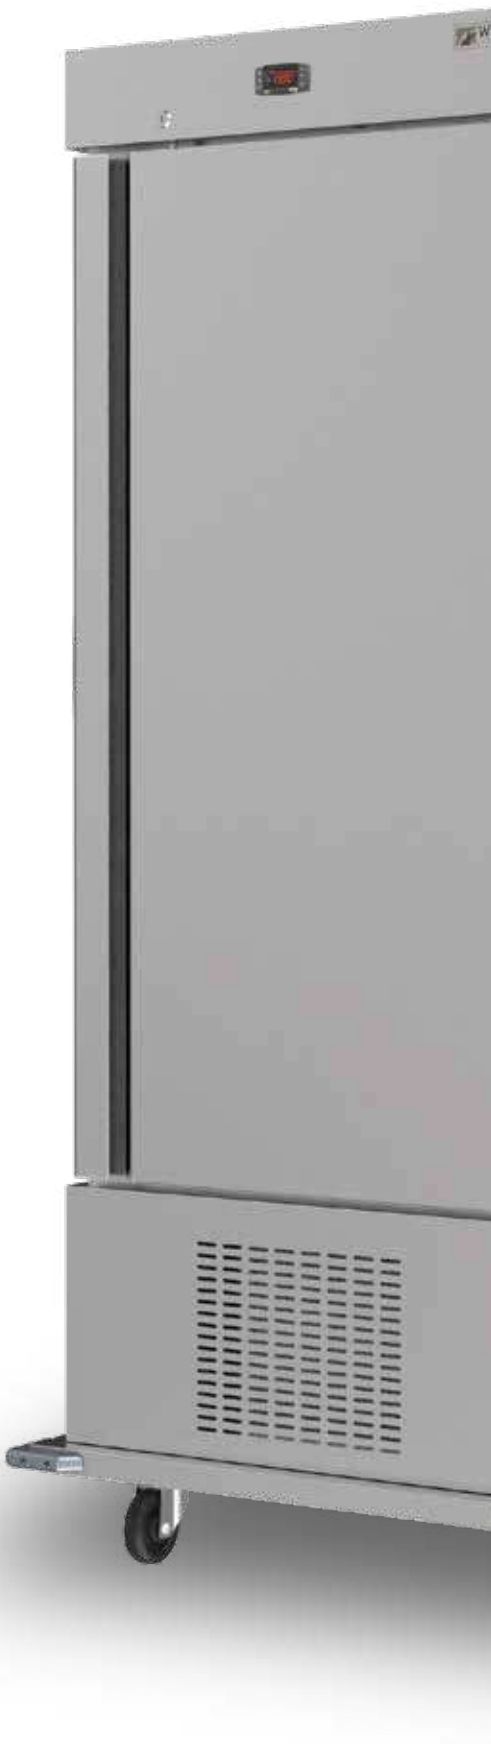

Optional Features

- Models with caster wheels are available.
- Adjustable racking system allows flexible storage.
- Accommodates GN 1/1, 1/2.

Key Features

- **AISI 304** food grade stainless steel is used.
- **Balanced, forced air refrigeration system** enables rapid product pull down and even temperature
- **60mm low density Polyurethane** foam is used for thermal insulation.
- **Anti condensation** door mullion heaters.
- **Environmental friendly** CFC free refrigerant (R134a)



Common Features

- 43⁰ C Ambient
- Hermetic Compressor
- Forced Air Circulation
- Defrosting by Heating Element
- R134a

Cabinet comes with standard colour

SS304 #4
Matt Finish

Tech Specs






Structural

Model	WB101C	WB101H	WB201C	WB201C
Dimension(WxDxH)	852 × 1000 x 2013mm	852 × 1000 x 1768mm	1650 x 1000 x 2013mm	1650 x 1000 x 1768mm
Gross Volume	560L	670L	1280L	1300L
Doors	1	1	2	2
No. of GN 1/1 shelves	8	8	16	16
Gn 1/1 pan accommodation per shelf	2	2	2	2
Weight	170kg	140kg	310kg	280kg

Refrigeration

Temperature	2° C to 8° C	30°C to 90°C	2° C to 8° C	30°C to 90°C
Climate Class	NT	NT	NT	NT
Cooling System	Dynamic cooling	Fan assisted heating	Dynamic cooling	Fan assisted heating
Defrost	Auto	Auto	Auto	Auto
Testing Standard	ISO 22041	ISO 22041	ISO 22041	ISO 22041
Operating Ambient	10°C to 43°C	10°C to 43°C	10°C to 43°C	10°C to 43°C
Refrigerant	R134a	NA	R134a	NA

Electrical @ 43°C Ambient

Power	447W	1040W	755W	2064W
Current	2A	4.4A	3.4A	9A
Voltage	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz
Power Consumption 24hrs	3.5kWh	8.4kWh	6kWh	16.5kWh
Power plug type	Type D	Type D	Type D	Type D

Performance, Reliability and Quality

- Fibre optic laser is used in manufacturing, which provides more accurate and precise joints for improved product quality, performance and safety.
- The doors are held using reinforced 3 mm stainless hinges at the top and bottom for added durability and to eliminate the risk of door sag (tested to then standard ISO 22041).
- Anti tilt heavy duty racking system is provided, with each capable of holding GN pans 1/1 and 2/1.
- In heated model, humidifer tank is provided to maintain the relative humidity of the food items kept inside.
- Bumper guard is provided for the safe tranport of the product.
- SS handles are provided on both the sides which helps in easy movement of the trolley.
- Frost free evaporator and condenser of copper tube and aluminium fins are used. (enhances better heat transfer)

Energy Efficiency and Sustainability


- High thermal resistive Polyurethane foam is used which has high resistance to heat transfer increasing the energy efficiency, also lasts for longer period of time.
- The system is sustainable that zero ODP refrigerants are used .

Value

- Food grade high quality AISI 304 Stainless Steel is used with the finish suitable for handling food and beverages.

Hygiene & Safety

- Push type lock handle in the door which is easy for opening and closing.
- Hygienic and contactless magnetic fan cut-out door switch with no moving parts.

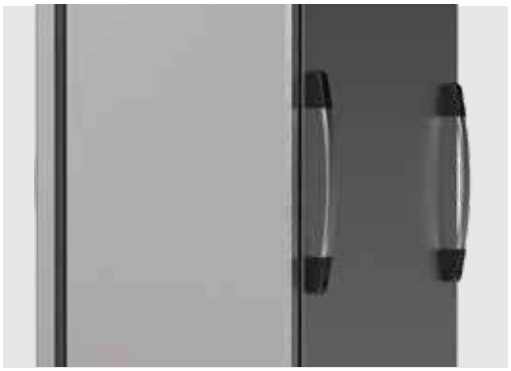

Side SS handle

SS handles are provided on both the sides which helps in easy movement of the trolley.



Adjustable racks

The racks are adjustable as per the requirement.



Bumper Guard

Bumper guard is provided for the safety transport of the product



Digital Controller

Digital controller of Italian make is used for precise control and display of the temperature of the food items.



Humidifier tank(for Heated models only)

Humidifier tank is provided to maintain the relative humidity of the food items kept inside



Cylindrical Lock

The lock facilitates safety and control over the stock.

Williams Refrigeration

UNIT-I
111 'C', KIADB Industrial Area
1st Phase, Bommasandra,
Hosur Main Road, Bangalore-560099, INDIA

UNIT-II
Plot No. 127&128, Bommasandra IV Phase,
Yarandahally,Bangalore-560099,
Karnataka, India.

+91-9844013768

sales@williamsrefrigeration.in
info@williamsrefrigeration.in

www.williamsrefrigeration.co.in

Facebook Youtube Instagram