Drop In



Williams

Drop In

Built to Last



About us

Williams refrigeration has been an Indian expert for over two decades, serving the HORECA industry providing premium fabrication and refrigeration solutions adapting recent trends in design and utilizing advanced technology equipment.


We offer comprehensive solutions with durable fabrication and refrigeration customized to your pastry shops, ice cream shops, bars, breweries, restaurants and supermarkets.

We align closely with our customer's requirements by delivering environment friendly products alongside exceptional service. Our foremost priority is continuous innovation, integrating novel technologies into our product line.

ISO 9001:2015 IAF UKAS

Frost Top

The frost top is specially designed for short-term holding and serving of pre-chilled, contained foods and beverages. This equipment possesses cold top designed to hold pre-chilled foods and beverages. This equipment is completely made of AISI 304 food-grade stainless steel interior and exterior with PU foam thermal insulation.

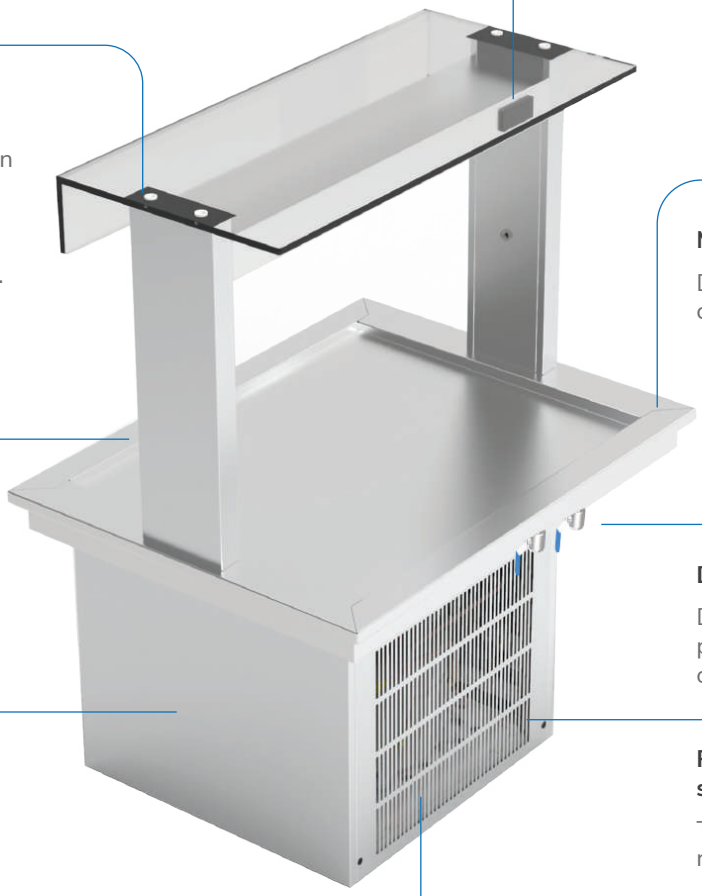

Digital controller

Precise control and display of the temperature of the food items.

Sneeze Guard

The 10mm toughened clear glass delivers reliable protection while enchancing the visual appeal. Its crystal-clear transparency ensures it seamlessly fits into any setting.

Mounting Provision

Designed to mount on the counter top tables.

Frost Top

Top on which the pre - chilled items are to be kept for short-term holding.

Drain Tube

Drain valve with tube is provided for effective cleaning of the equipment.

Static cooling system

Produces quick and silent cooling leading to stable environment.

Removable Monoblock cooling system

The monoblock is easy to remove and service.

Ventilation


Adequate ventilation is provided for the effective functioning of the refrigeration system.

Cold Bain Marie & Cold Well

The cold well is specially designed to hold pre-chilled contained foods and beverages. The equipment is completely made of AISI 304 food-grade stainless steel interior and exterior with PU foam thermal insulation.

Sneeze Guard

The 10mm toughened clear glass delivers reliable protection while enchancing the visual appeal. Its crystal-clear transparency ensures it seamlessly fits into any setting.

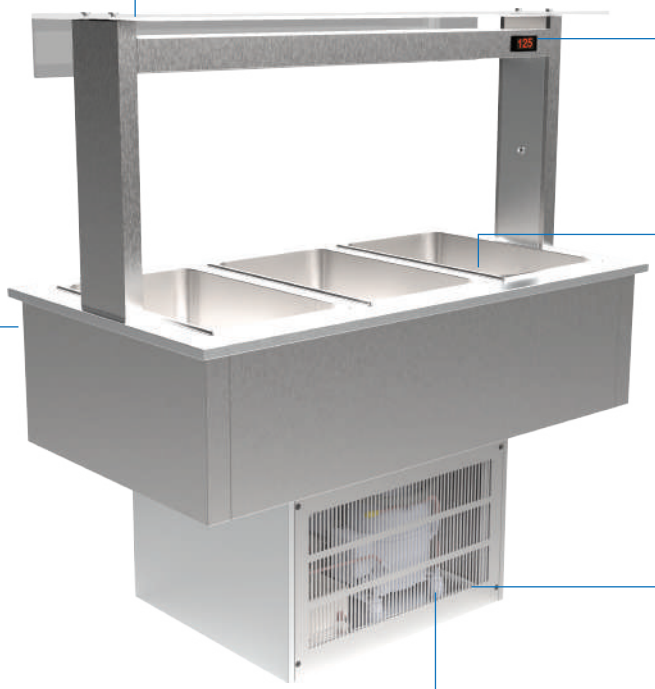

Digital controller

Precise control and display of the temperature of the food items.

Drop In well

Items with GN pans are placed in it.

Mounting provision

Designed to mount on the counter top tables

Removable Monoblock cooling system

The monoblock is easy to remove and service.

Ventilation

Adequate ventilation is provided for the effective functioning of the refrigeration

Hot Bain Marie


Hot Bain Marie is used to keep food warm over an extended period maintaining at a safe serving temperature. This equipment is completely made of AISI 304 food grade stainless steel interior and exterior with PU foam thermal insulation.

Digital Controller

Precise control and display of the temperature of the food items.

Sneeze Guard

The 10mm toughened clear glass delivers reliable protection while enchancing the visual appeal. Its crystal-clear transparency ensures it seamlessly fits into any setting.

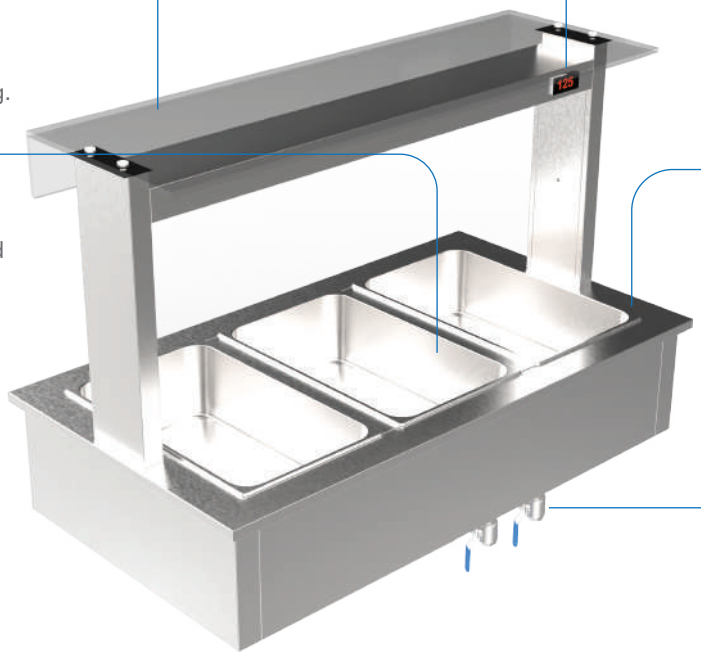

Drop In well

Items with GN pans are placed in it.

Mounting Provision

Designed to mount on the counter top tables.

Drain tube

Drain valve with tube is provided for effective cleaning of the equipment.

Standard Features

- Easy to use microprocessor control with digital display for easy visual reference.
- Stainless steel interior & exterior finish.
- Efficient and durable compressor.
- Designed and engineered to operate up to 23° C ambient.

Key Features


- **AISI 304** food grade stainless steel is used.
- **60mm thick low density Polyurethane** foam is used for thermal insulation.
- **Environmental friendly** CFC free refrigerant (R134a or R404A)



Frost Top




Cold Bain Marie & Cold Well



Hot Bain Marie


Mounting Provision

Designed to mount on the counter top tables.



SpotLight

With LED display light integrated, this feature adds a refined touch to your space, boosting its visual charm and making it more inviting.



Sneeze Guard

The 10mm toughened clear glass delivers reliable protection ensures it seamlessy fits into any environment.



Hoist-Mounted Digital Controller

Designed for optical accessibility, the user-friendly interface ensures smooth navigation through setting, even for those new to the system.





Equipment comes with standard colour

Tech Specs - Frost Top

Structural

Model	WFT2	WFT3
Dimension(WxDxH)	850 x 660 x 842mm	1200x 660 x 1242mm
Cut-out Size	750 x 640mm	1090 x 640mm
Weight	65kg	75kg

Refrigeration

Temperature	-15° C to -18° C	-15° C to -18° C
Climate Class	NT	NT
Cooling System	Static cooling	Static cooling
Defrost	NA	NA
Testing Standard	ISO 22041	ISO 22041
Operating Ambient	10°C to 23°C	10°C to 23°C
Refrigerant	R404A	R404A

Electrical @ 23°C Ambient

Power	500W	750W
Current	2.6A	3.8A
Voltage	1ph / 230V / 50Hz	1ph / 230V / 50Hz
Power Consumption 24hrs	4kWh	6kWh
Power plug type	Type D	Type D

Tech Specs - Cold Bain Marie

Structural

Model	WCBM1	WCBM2	WCBM3	WCBM4
Dimension(WxDxH)	500 x 660 x 1242mm	850 × 660 x 1242mm	1200 x 660 x 1242mm	1550 x 660 x 1242mm
Cut-out Size	420 × 640mm	750 × 640mm	1090 x 640mm	1430 x 640mm
No. of 1/1 GN pan compatible	1	2	3	4
Weight	45kg	55kg	65kg	75kg

Refrigeration

Temperature	+2° Cto +5° C	+2° Cto +5° C	+2° Cto +5° C	+2° Cto +5° C
Climate Class	NT	NT	NT	NT
Cooling System	Dynamic cooling	Dynamic cooling	Dynamic cooling	Dynamic cooling
Defrost	NA	NA	NA	NA
Testing Standard	ISO 22041	ISO 22041	ISO 22041	ISO 22041
Operating Ambient	10°C to 23°C	10°C to 23°C	10°C to 23°C	10°C to 23°C
Refrigerant	R134a	R134a	R134a	R134a

Electrical @ 23°C Ambient

Power	500W	500W	750W	750W
Current	2.6A	2.6A	3.8A	3.8A
Voltage	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz
Power Consumption 24hrs	4kWh	4kWh	6kWh	6kWh
Power plug type	Type D	Type D	Type D	Type D

Tech Specs - Cold Well

Structural

Model	WCW2	WCW3
Dimension(WxDxH)	850 × 660 x 1242mm	1200 × 660 x 1242mm
Cut-out Size	750 × 640mm	1090 x 640mm
No. of 1/1 GN pan compatible	2	3
Weight	65kg	75kg

Refrigeration

Temperature	+2° Cto +5° C	+2° Cto +5° C
Climate Class	NT	NT
Cooling System	Dynamic cooling	Dynamic cooling
Defrost	NA	NA
Testing Standard	ISO 22041	ISO 22041
Operating Ambient	10°C to 23°C	10°C to 23°C
Refrigerant	R134a	R134a

Electrical @ 23°C Ambient

Power	500W	750W
Current	2.6A	3.8A
Voltage	1ph / 230V / 50Hz	1ph / 230V / 50Hz
Power Consumption 24hrs	4kWh	6kWh
Power plug type	Type D	Type D

Tech Specs - Hot Bain Marie

Structural

Model	WHBM1	WHBM2	WHBM3	WHBM3	WHBM4
Dimension(WxDxH)	500 x 660 x 842mm	850 x 660 x 842mm	1200 x 660 x 842mm	1550 × 660 x 842mm	1850 x 660 x 842mm
Cut-out Size	410 × 630mm	750 x 630mm	1095 x 630mm	1455 × 630mm	1795 x 630mm
No. of 1/1 GN pan compatible	1	2	3	4	5
Weight	45kg	55kg	65kg	75kg	85kg

Refrigeration

Temperature	+30° C to +90° C	+30° C to +90° C	+30° Cto +90° C	+30° C to +90° C	+30° C to +90° C
Testing Standard	ISO 22041	ISO 22041	ISO 22041	ISO 22041	ISO 22041

Electrical

Power	1000W	1500W	2000W	2500W	3000W
Current	5.1A	7.6A	10.2A	12.8A	15.3A
Voltage	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz
Power Consumption 24hrs	8kWh	12kWh	16kWh	20kWh	24kWh
Power plug type	Type D	Type D	Type D	Type D	Type D

Performance, Reliability and Quality

- Fiber optic laser is used in manufacturing, which provides more accurate and precise joints for improved product quality, performance and safety.
- Renowned for its dependable performance, delivering consistent cooling and precise temperature control to satisfy the needs of high-demand commercial kitchens and catering operations.

Energy Efficiency and Sustainability

- High thermal resistive Polyurethane foam is used which has high resistance to heat transfer increasing the energy efficiency, also lasts for longer period of time.
- The system is sustainable the zero ODP refrigerants are used.

Value

- Food grade high quality AISI 304 Stainless Steel is used with the finish suitable for handling food and beverages.

Common Features


23°C Ambient


Hermetic Compressor


Static Cooling & Dynamic Air Circulation


Defrosting by Heating Element


R134a / R404A

Williams Refrigeration

UNIT-I
111 'C', KIADB Industrial Area
1st Phase, Bommasandra,
Hosur Main Road, Bangalore-560099, INDIA

UNIT-II
Plot No. 127&128, Bommasandra IV Phase,
Yarandahally,Bangalore-560099,
Karnataka, India.

+91-9844013768

sales@williamsrefrigeration.in
info@williamsrefrigeration.in

www.williamsrefrigeration.co.in

Facebook Youtube Instagram