
Pan Coolers



Williams
Pan Coolers
Built to Last

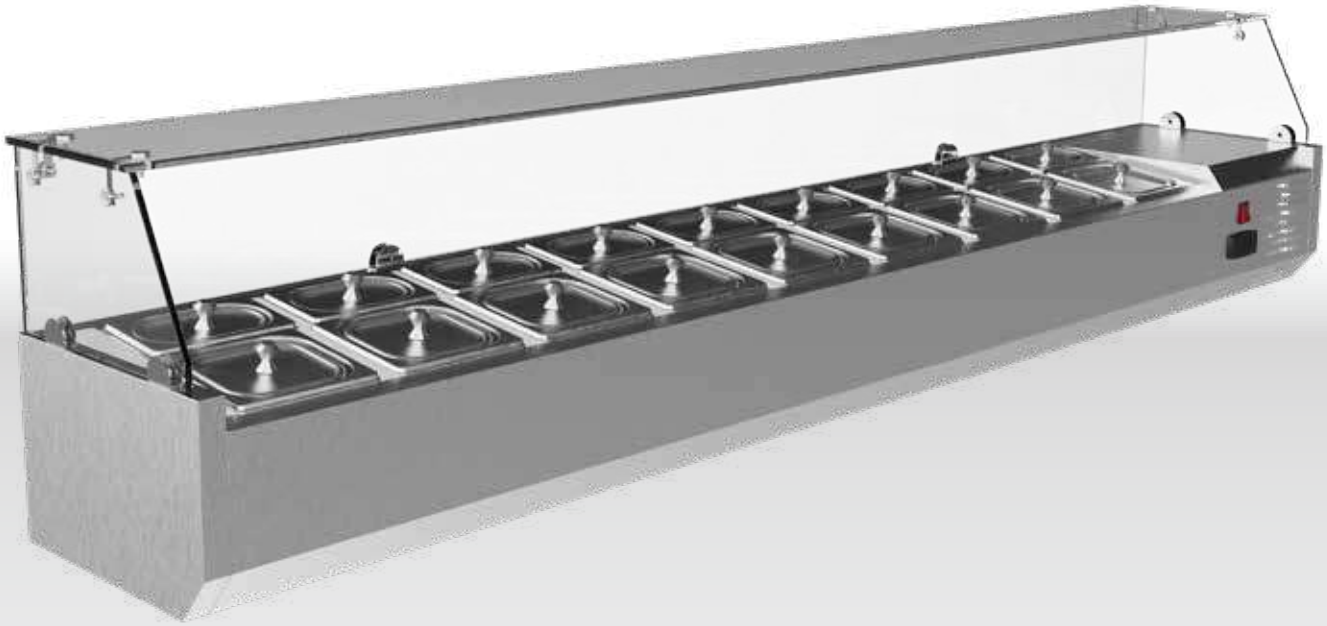

About us

Williams refrigeration has been an Indian expert for over two decades, serving the HORECA industry providing premium fabrication and refrigeration solutions adapting recent trends in design and utilizing advanced technology equipment.

We offer comprehensive solutions with durable fabrication and refrigeration customized to your pastry shops, ice cream shops, bars, breweries, restaurants and supermarkets.

We align closely with our customer's requirements by delivering environment friendly products alongside exceptional service. Our foremost priority is continuous innovation, integrating novel technologies into our product line.

ISO 9001:2015 IAF UKAS

Pan Coolers

The Pan coolers are refrigerated appliances that keep toppings fresh and clean. The pans are maintained at a temperature of 0 to 4 °C. Pan coolers are available for various GN pan sizes. This equipment is completely made of AISI 304 food-grade stainless steel interior and exterior with PU foam thermal insulation.

Top Lid


Lid designed to keep open for easy access and cleaning

Sneeze Guard

The 10mm toughened clear glass delivers reliable protection while enchancing the visual appeal. Its crystal-clear transparency ensures it seamlessly fits into any setting.

Ventilation


Adequate ventilation is provided for the effective functioning of the refrigeration system.

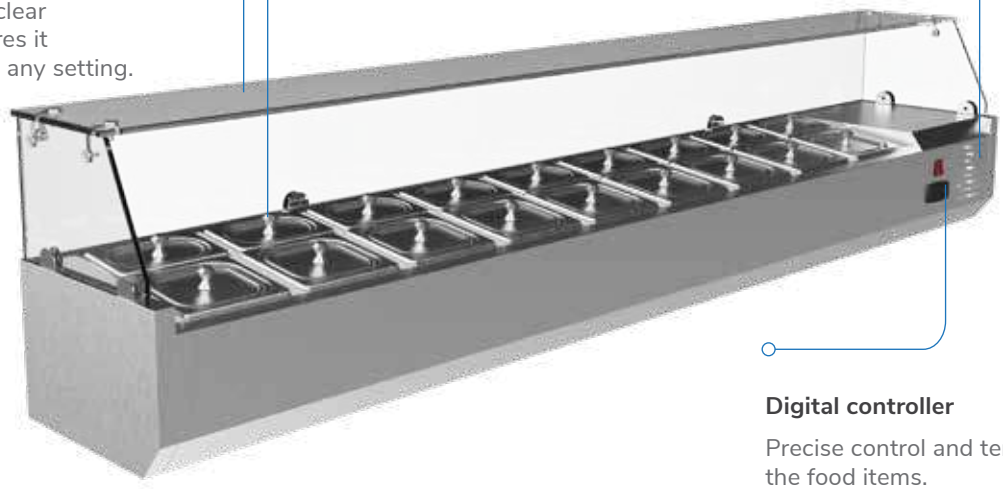

Digital controller

Precise control and temperature of the food items.

Product Code

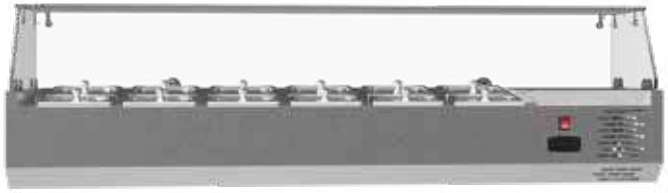

PAN 1550 G

Product Name	Cabinet length	Sneeze Guard
PAN - Pan Cooler	1350 - 1350mm 1550 - 1550mm 1800 - 1800mm 2100 - 2100mm	Not Mantioned : without sneeze guard G : with sneeze guard



PAN1350



PAN1550



PAN1800



PAN2100



PAN1350G



PAN1550G



PAN1800G



PAN2100G

Standard Features

- Easy to use microprocessor control with digital display for easy visual reference.
- Stainless steel interior & exterior finish.
- Static cooling performs noiseless operation.
- **Efficient and durable** compressor.
- Designed and engineered to operate up to **32° C ambient.**

Key Features

- **AISI 304** food grade stainless steel is used.
- **Balanced, forced air refrigeration system** enables rapid product pull down and even temperature throughout.
- **40mm low density Polyurethane** foam is used for thermal insulation.
- **Anti condensation** door mullion heaters.
- **Environmental friendly** CFC free refrigerant (R134a)

Optional Features

- Sneeze guard is provided as an optional feature.



Sneeze Guard

Sneeze guard protects the food from airbone contamination.



Pan configuration

Can accomodate GN pan of various sizes



Digital Controller

Digital controller of Italian make is used for precise control and display of the temperature of the food items.

Cabinet comes with standard colour



Tech Specs






Structural

	PAN1350	PAN1350G	PAN1550	PAN1550G
Model	PAN1350	PAN1350G	PAN1550	PAN1550G
Dimension(WxDxH)	1355 × 335 x 225mm	1355 × 335 x 430mm	1550 × 335 × 225mm	1550 x 335 x 430mm
Gross Volume	40L	40L	50L	50L
GN pan Compatibility	1/4 - 6nos	1/4 - 6nos	1/4 (6") - 6nos and 1/9 (6") - 6nos	1/4 (6")- 6nos and 1/9 (6") - 6nos
Weight	32kg	47kg	32kg	50kg



Refrigeration

Temperature	0° C to 4° C	0° C to 4° C	0° C to 4° C	0° C to 4° C
Climate Class	NT	NT	NT	NT
Cooling System	Static cooling	Static cooling	Static cooling	Static cooling
Defrost	NA	NA	NA	NA
Testing Standard	ISO22041	ISO 22041	ISO 22041	ISO 22041
Operating Ambient	10°C to 32°C	10°C to 32°C	10°C to 32°C	10°C to 32°C
Refrigerant	R134a	R134a	R134a	R134a

Electrical @ 32°C Ambient

Power	232W	232W	232W	232W
Current	1A	1A	1A	1A
Voltage	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz
Power consumption 24hrs	1.86kWh	1.86kWh	1.86kWh	1.86kWh
Power Plug type	Type D	Type D	Type D	Type D

Tech Specs


Structural	PAN1800	PAN1800G	PAN2100	PAN2100G
Model	PAN1800	PAN1800G	PAN2100	PAN2100G
Dimension(WxDxH)	1803 × 335 x 225mm	1803 x 335 x 430mm	2100 x 345 x 225mm	2100 x 345 × 430mm
Gross Volume	60L	60L	72L	72L
GN pan Compatibility	1/4 - 9nos	1/4 - 9nos	1/6 (6")- 9nos and 1/9 (6") - 9nos	1/6 (6") - 9nos and 1/9 (6") - 9nos
Weight	58kg	70kg	65kg	90kg

Refrigeration

Temperature	0° C to 4° C	0° C to 4° C	0° C to 4° C	0° C to 4° C
Climate Class	NT	NT	NT	NT
Cooling System	Static cooling	Static cooling	Static cooling	Static cooling
Defrost	NA	NA	NA	NA
Testing Standard	ISO 22041	ISO 22041	ISO 22041	ISO 22041
Operating Ambient	10°C to 32°C	10°C to 32°C	10°C to 32°C	10°C to 32°C
Refrigerant	R134a	R134a	R134a	R134a

Electrical @ 32°C Ambient

Power R/F*	232W	232W	300W	300W
Current R/F*	1A	1A	1.3A	1.3A
Voltage	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz
Power consumption 24hrs	1.86kWh	1.86kWh	2.4kWh	2.4kWh
Power Plug type	Type D	Type D	Type D	Type D

Performance, Reliability and Quality

- Fibre optic laser is used in manufacturing, which provides more accurate and precise joints for improved product quality, performance and safety.
- High quality imported compressor has been used which gives better performance.

Energy Efficiency and Sustainability

- High thermal resistive Polyurethane foam is used which has high resistance to heat transfer increasing the energy efficiency, also lasts for longer period of time.
- The system is sustainable that zero ODP refrigerants are used.

Value

- Food grade high quality AISI 304 Stainless Steel is used with the finish suitable for handling food and beverages.

Hygiene & Safety

- The 10mm toughened clear glass delivers reliable protection while enchancing the visual appeal.Its crystal-clear transparency ensures it seamlessly fits into any setting.
- Lid designed to keep open for easy access and cleaning.

Common Features


32º C Ambient


Hermetic Compressor


Static Cooling System

Williams Refrigeration

UNIT-I
111 'C', KIADB Industrial Area
1st Phase, Bommasandra,
Hosur Main Road, Bangalore-560099, INDIA

UNIT-II
Plot No. 127&128, Bommasandra IV Phase,
Yarandahally,Bangalore-560099,
Karnataka, India.

+91-9844013768

sales@williamsrefrigeration.in
info@williamsrefrigeration.in

www.williamsrefrigeration.co.in

Facebook Youtube Instagram