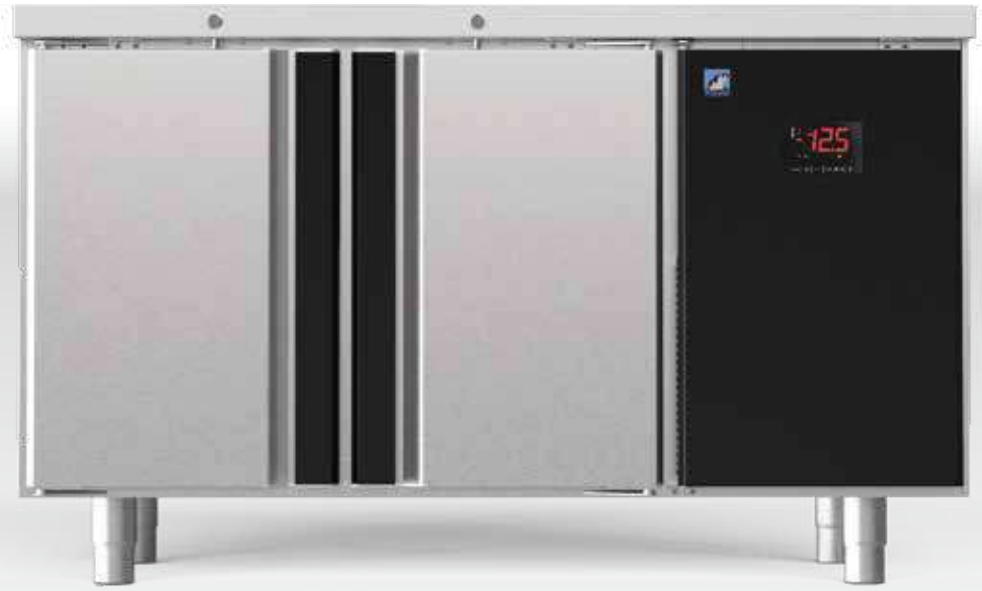
R290

REFRIGERATED COUNTERS

ECO FRIENDLY

Williams refrigeration



Williams

Refrigerated Counters

Built to Last



About us

Williams refrigeration has been an Indian expert for over two decades, serving the HORECA industry providing premium fabrication and refrigeration solutions adapting recent trends in design and utilizing advanced technology equipment.

We offer comprehensive solutions with durable fabrication and refrigeration customized to your pastry shops, ice cream shops, bars, breweries, restaurants and supermarkets.

We align closely with our customer's requirements by delivering environment friendly products alongside exceptional service. Our foremost priority is continuous innovation, integrating novel technologies into our product line.

ISO 9001:2015 IAF UKAS

Refrigerated Counters-Doors

The refrigerated counters are appliances designed to fit under your counters and between cabinets to store food and other beverages. Both chiller and freezer models are available for the same cabinet dimension. Refrigerated counters are available in single, double and triple door variants as well as in multiple drawer variants. This equipment is completely made of AISI 304 food-grade stainless steel interior and exterior with PU foam thermal insulation for optimal freshness.



Forced air circulation system
Aids in quick and even circulation of cool air.

Anti - tilt tray slides
The anti-tilt tray slides are easy to remove and clean and also avoids tipping.

Removable and washable gasket
Prevents the infiltration of outside air into the refrigerated space.

Caster wheels
Provides flexibility and mobility.

Adjustable bullet feet
The leveling of the system can be done using the adjustable feet (range 130-170mm).

Ventilation
Adequate ventilation is provided for the effective functioning of the refrigeration system.

Digital controller
Precise control and display of the temperature of the food items.

Removable Monoblock cooling system
The monoblock is easy to remove and service.

105° door opening
This helps during loading and stock verification.

Mullion heater
Helps in preventing harmful dirt traps due to condensation.

Refrigerated Counters-Drawers

Diverse work top profiles
The work top is available in different profiles suitable for varying requirements.

Forced air circulation system
Aids in quick and even circulation of cool air.



Removable and washable gasket
Prevents the infiltration of outside air into the refrigerated space.

Mullion heater
Helps in preventing harmful dirt traps due to condensation.

Retractable drawers with telescopic channel
This helps in easy closing of the drawer

Digital controller
Precise control and display of the temperature of the food items.

Ventilation
Adequate ventilation is provided for the effective functioning of the refrigeration system.

Caster wheels
Provides flexibility and mobility.

Adjustable bullet feet
The leveling of the system can be done using the adjustable feet (range 130-170mm).

Product Code



A W R 1350L 2 G HC D4 RHS

Climate Class
All Weather

Company Name
Williams

Cabinet type
Refrigerator (+2°C to +8°C)
Freezer (-15°C to - 21°C)

Cabinet length
1 door - 900mm
2 door - 1350mm
3 door - 1800mm

Number of compartment
1 - 1 compartment
2 - 2 compartments
3 - 3 compartments

Door type
G - Glass Door

Refrigerant
HC - Hydrocarbon

Number of Drawers
D2 - 2 drawers
D4 - 4 drawers
D6 - 6 drawers
D9 - 9 drawers

Condensing Unit Position
LHS - Left Hand Side
RHS - Right Hand Side

AWR900L1 HC LHS/RHS/
AWF900L1 HC LHS/RHS

REFRIGERATOR / FREEZER 155L



AWR900L1G HC -LHS/RHS

REFRIGERATOR 155L



AWR1350L2HC -LHS/RHS /
AWF1350L2 HC -LHS/RHS

REFRIGERATOR / FREEZER 310L



AWR1350L2G HC -LHS/RHS

REFRIGERATOR 310L



AWR1800L3 HC-LHS/RHS/
AWF1800L3 HC-LHS/RHS

REFRIGERATOR / FREEZER 470L



AWR1800L3G HC -LHS/RHS

REFRIGERATOR 470L



AWR900D2 HC - LHS/RHS
AWF900D2 HC - LHS/ RHS

REFRIGERATOR / FREEZER 155L



AWR1350D4 HC - LHS /RHS
AWF1350D4 HC - LHS / RHS

REFRIGERATOR / FREEZER 310L



AWR1350D6 HC - LHS/ RHS
AWF1350D6 HC - LHS / RHS

REFRIGERATOR / FREEZER 310L



AWR1800D6 HC - LHS/ RHS
AWF1800D6 HC - LHS / RHS

REFRIGERATOR / FREEZER 470L



AWR1800D9 HC - LHS / RHS
AWF1800D9 HC - LHS / RHS

REFRIGERATOR / FREEZER 470L



Standard Features

- Front ventilation provided in this system is suitable for enclosed areas.
- Door locks provide added security.
- High-quality washable **magnetic door gasket.**
- Easy to use microprocessor control with digital display for easy visual reference.
- Stainless steel interior & exterior finish.
- Retractable drawers with telescopic channels. This helps in the easy closing of the drawer.
- Adjustable legs to ensure stability on an uneven floor.
- Efficient and durable and **en** compressor.
- **Automatic defrost** ensures the evaporator working to its optimum performance.
- Designed and engineered to operate up to **43° C ambient.**

Optional Features

For Drawer Models

- Models with caster wheels are available.
- Left / Right-hand side condensing unit.
- Back / side splash.
- Front / side skirting.
- Accommodates GN 1/1, 1/2.

For Door Models

- Models with caster wheels are available.
- LED is provided in glass door models.
- Left / Right-hand side condensing unit.
- Back / side splash.
- Front / side skirting.
- Accommodates GN 1/1, 1/2.
- Combination of drawers and doors options are available.

Key Features

- **AISI 304** food grade stainless steel is used.
- **Balanced, forced air refrigeration system** enables rapid product pull down and even temperature throughout.
- **60mm low density Polyurethane** foam is used for thermal insulation.
- **Anti condensation** door mullion heaters.
- **Natural refrigerant** R290 refrigerant is used with zero ODP and GWP 3.



Cabinet comes with standard colour

Black Matt



Tech Specs-Door Models


Structural

1 SS DOOR

1 GLASS DOOR


2 SS DOOR

2 GLASS DOOR


3 SS DOOR


3 GLASS DOOR

Model R/F*	**AWR900L1 HC-LHS/RHS AWF900L1 HC-LHS/RHS**	**AWR900L1G HC-LHS/RHS**	**AWR1350L2 HC-LHS/RHS AWF1350L2 HC-LHS/RHS**	**AWR1350L2G HC-LHS/RHS**	**AWR1800L3 HC-LHS/RHS AWF1800L3 HC-LHS/RHS**	**AWR1800L3G HC-LHS/RHS**
Dimension(WxDxH)	900x700x850mm	900x700x850mm	1350x700x850mm	1350x700x850mm	1800x700x850mm	1800x700x850mm
Gross Volume	155L	155L	310 L	310 L	470L	470L
Doors	1	1	2	2	3	3
No. of GN 1/1 shelves	2	2	4	4	6	6
Shelf Size	530x325mm	530x325mm	530x325mm	530x325mm	530x325mm	530x325mm
Weight	85kg	85kg	100kg	121kg	121kg	121kg

Refrigeration




Temperature R/F*	2° C to 8° C / -15° C to - 21° C	2° C to 8° C	2° C to 8° C / -15° C to - 21° C	2° C to 8° C	2° C to 8° C / -15° C to - 21° C	2° C to 8° C
Climate Class	T	T	T	T	T	T
Cooling System	Dynamic cooling	Dynamic cooling	Dynamic cooling	Dynamic cooling	Dynamic cooling	Dynamic cooling
Defrost	Auto	Auto	Auto	Auto	Auto	Auto
Testing Standard	ISO 22041	ISO 22041	ISO 22041	ISO 22041	ISO 22041	ISO 22041
Operating Ambient	10°C to 43°C	10°C to 43°C	10°C to 43°C	10°C to 43°C	10°C to 43°C	10°C to 43°C
Refrigerant	R290	R290	R290	R290	R290	R290

Electrical @ 43°C Ambient

Power R/F*	256/535W	300W	314/622W	384W	404/980W	424W
Current R/F*	1.1/2.2A	1.4A	1.54/2.8A	1.67A	1.76/4.1A	1.85A
Voltage	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz
Power Consumption 24hrs R/F*	2.3/4.3kWh	2.5kWh	2.43/4.9kWh	2.8kWh	3/7.9kWh	3.5kWh
Power Plug type	Type D	Type D	Type D	Type D	Type D	Type D

Tech Specs-Drawers Models

Structural

	 2 DRAWERS	 4 DRAWERS	 6 DRAWERS	 6 DRAWERS	 9 DRAWERS
Model R/F*	**AWR900D2 HC-LHS / RHS AWF900D2 HC-LHS / RHS**	**AWR1350D4 HC-LHS / RHS AWF1350D4 HC-LHS / RHS**	**AWR1350D6 HC-LHS / RHS AWF1350D6 HC-LHS / RHS**	**AWR1800D6 HC-LHS / RHS AWF1800D6 HC-LHS / RHS**	**AWR1800D9 HC-LHS /RHS AWF1800D9 HC-LHS / RHS**
Dimension(WxDxH)	900x700x850mm	900x700x850mm	1350x700x850mm	1350x700x850mm	1800x700x850mm
Gross Volume	145L	300L	300L	470L	470L
Drawers (GN pan 1/1 compatible)	2	4	6	6	9
Drawer Size	530x325mm	530x325mm	530x325mm	530x325mm	530x325mm
Weight	100kg	150kg	150kg	160kg	160kg

Refrigeration

Temperature R/F*	2° C to 8° C / -15° C to - 21° C	2° C to 8° C / -15°C to -21°C	2° C to 8° C / -15°C to -21°C	2° C to 8° C / -15°C to -21°C	2° C to 8° C / -15°C to -21°C
Climate Class	T	T	T	T	T
Cooling System	Dynamic cooling	Dynamic cooling	Dynamic cooling	Dynamic cooling	Dynamic cooling
Defrost	Auto	Auto	Auto	Auto	Auto
Testing Standard	ISO 22041	ISO 22041	ISO 22041	ISO 22041	ISO 22041
Operating Ambient	10°C to 43°C	10°C to 43°C	10°C to 43°C	10°C to 43°C	10°C to 43°C
Refrigerant R/F*	R290	R290	R290	R290	R290

Electrical @ 43°C Ambient

Power R/F*	256/535W	314/622W	314/622W	375/980W	375/980W
Current R/F*	1.1/2.2A	1.34/2.8A	1.34/2.8A	1.7/4.5A	1.76/4.5A
Voltage	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz	1ph / 230V / 50Hz
Power Consumption 24hrs R/F*	2.3/4.3kWh	2.43/4.9kWh	2.43/4.9kWh	3.23/7.9kWh	3.23/7.9kWh
Power Plug type	Type D	Type D	Type D	Type D	Type D

Performance, Reliability and Quality

- Fibre optic laser is used in manufacturing, which provides more accurate and precise joints for improved product quality, performance and safety.
- Full length retractable drawer fitted as standard for easy accessing and better organising the food products.
- The drawers are held using telescopic channel.
- The drawers slide ultra smoothly which helps in easy closure.
- Each drawer can accommodate GN pan 1/1 .
- Automatic defrost ensures the evaporator working to its optimum performance.
- Frost free evaporator and condenser of copper tube and aluminium fins are used. (enhances better heat transfer)

Energy Efficiency and Sustainability

- High thermal resistive Polyurethane foam is used which has high resistance to heat transfer increasing the energy efficiency, also lasts for longer period of time.
- The self closing door in-turn increases the energy efficiency, low cooling loss equals to low power consumption.
- The system is sustainable that zero ODP refrigerants are used.

Value

- Food grade high quality AISI 304 Stainless Steel is used with the finish suitable for handling food and beverages.

Hygiene & Safety

- Flush handle in the drawers which is easy for opening and cleaning.
- Hygienic and contactless magnetic fan cut-out door switch with no moving parts.

Common Features


43°C Ambient


Hermetic Compressor


Forced Air Circulation


Defrosting by Heating Element


R290



Digital controller

Digital controller of Italian make is used for precise control and display of the temperature of the food items.



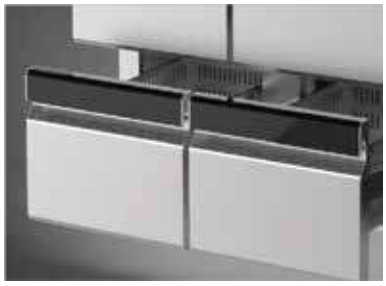
Adjustable Racks

The racks are adjustable as per the requirement.



Two pane glass with Argon Gas

Two pane Argon filled glass is provided which acts as a insulator.



Telescopic Retractable channel

High-Quality telescopic channels imported from Europe is used



Self closing door

Prevents the loss of cooling from the system, also helps when both the hands are loaded.



Cylindrical Lock

The lock facilitates safety and control over the stock.



Side Perforated drawers

Enhances proper flow of cool air throughout the drawer.

Williams
refrigeration

Williams Refrigeration

UNIT-I
111 'C', KIADB Industrial Area
1st Phase, Bommasandra,
Hosur Main Road, Bangalore-560099, INDIA

UNIT-II
Plot No. 127&128, Bommasandra IV Phase,
Yarandahally,Bangalore-560099,
Karnataka, India.

+91-9844013768

sales@williamsrefrigeration.in
info@williamsrefrigeration.in

www.williamsrefrigeration.co.in

Facebook Youtube Instagram