

FULL-RANGE LOUDSPEAKER

DA46

4-WAY FULL-RANGE HORN LOUDSPEAKER

Compact 4-way single-horn system with B&C neodymium transducers.

4-WAY

B&C TRANSDUCERS

40° x 60°

NOMINAL COVERAGE

OVERVIEW

DA46 is a four-way full-range horn loudspeaker built around B&C transducers: two 12NDL88 12-inch low-frequency drivers, two 5NSM38 5-inch midrange drivers and a DCX354 dual-diaphragm coaxial compression driver covering the high and very-high bands. All four bands share a single 40° x 60° horn, each entering the flare at a position chosen for phase alignment at crossover. The fourth band gives more output and headroom than a conventional 3-way horn of the same size.

SYSTEM SPECIFICATIONS


MAX SPL (CONT. / PEAK)	135 dB / 141 dB, 1 m
OPERATING RANGE	71 Hz - 14.5 kHz (±3 dB) 58 Hz - 16 kHz (-10 dB)
SENSITIVITY	106 dB, 2.83 V / 1 m
POWER HANDLING	1400 W cont. / 5600 W peak
NOMINAL IMPEDANCE	4 Ω
RECOMMENDED AMPLIFIER	2800 W

CONNECTION & MECHANICAL

SYSTEM OPERATION	Passive (1 channel) or bi-amp (2 channels)
INPUT CONNECTORS	2 x Neutrik NL4, parallel
NOMINAL COVERAGE	40° horizontal / 60° vertical
ENCLOSURE MATERIAL	18 mm Baltic birch plywood
FINISH	Polyurea coating
DIMENSIONS / WEIGHT	737 x 567 x 577 mm / 53.5 kg

SECTION SPECIFICATIONS

2 x 12 INCH LF SECTION B&C 12NDL88 Power: TBD Sensitivity: TBD	2 x 5 INCH HORN-LOADED MID B&C 5NSM38 Power: TBD Sensitivity: TBD	1 x 1.4 INCH COAX HF + VHF SECTIONS B&C DCX354 Power: TBD Sensitivity: TBD
---	--	---

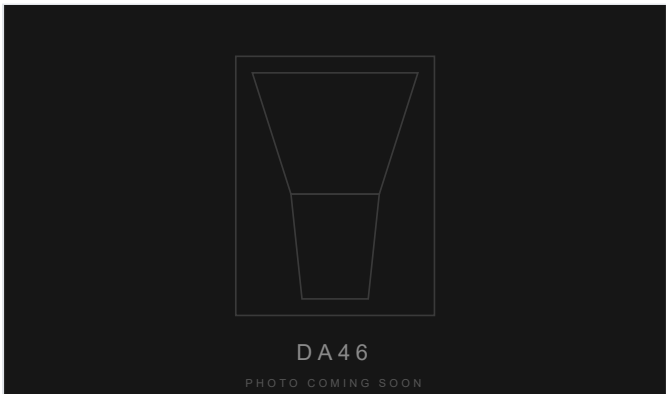

WIRING:

2x Neutrik NL4 Speakon, wired in parallel

Passive: Pin 1+/- | Full range
Pin 2+/- | Pass-through

Bi-amp: Pin 1+/- | LF
Pin 2+/- | MF/HF

OPERATIONAL REQUIREMENTS

- Processor preset:** Recommended in passive mode, required in bi-amp mode. Apply the approved crossover filters, equalisation, time alignment, polarity and limiter settings before operation. The stated operating range is only valid with the final approved system preset.

Deployment: Flown or ground stacked. Any flown deployment requires approved, documented enclosure hardware and an independently verified rigging solution. Cabinet uses multiple M10 rigging points.