

LOW-FREQUENCY SYSTEM

DA18

PASSIVE TAPPED HORN SUBWOOFER

High-output single 18-inch bass enclosure for professional sound reinforcement.

32 - 80 Hz

OPERATING RANGE (-6 DB)

1800 W AES

NOMINAL POWER HANDLING

OVERVIEW


DA18 is a passive, single-driver tapped horn subwoofer designed around the 18Sound 18NTLW5000 transducer. It is intended for use with a dedicated system processor, suitable amplification and correctly configured protection limiters.

SYSTEM SPECIFICATIONS

PRODUCT TYPE	Passive tapped horn subwoofer
MAX SPL	134 dB Continuous
FREQUENCY RESPONSE	32-80 Hz (-6 dB, processed)
POWER HANDLING	1800 W AES
SENSITIVITY/MAX SPL	101 dB @ 2.83 V / 1 m, half-space

CONNECTION & MECHANICAL

NOMINAL IMPEDANCE	8 Ω
INPUT CONNECTORS	2x Neutrik NL4
ENCLOSURE MATERIAL	18 mm birch plywood
FINISH	Warnex
DIMENSIONS / WEIGHT	1016 x 571 x 724 mm / 72,5 kg

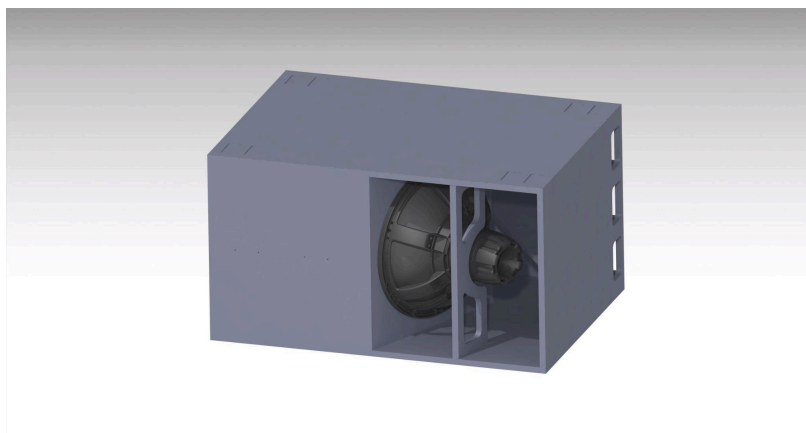

WIRING:

2x Neutrik NL4 Speakon wired in Parallel

Pin 1+/- | 8 Ohm Single Channel

Pin 2+/- | Pass Through

OPERATIONAL REQUIREMENTS

Processor preset: Required. Apply the approved high-pass filter, low-pass filter, equalisation, delay and limiter settings before operation. The quoted response is obtained under processed conditions.

This subwoofer is designed for ground stacked operation / deployment only.

NOTES

- Frequency response is stated at -6 dB and is dependent on the approved processor preset and deployment environment.