




**FAST FILL
SYSTEMS**

PRODUCT
CATALOGUE
2027

**FUEL FASTER.
WORK LONGER.**



QUALITY. SERVICE. INNOVATION.

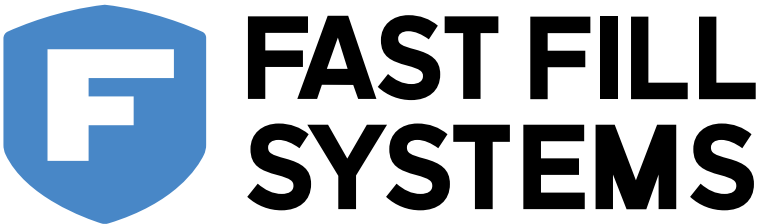

2055 S. Tracy Hall Parkway, Provo, UT 84606

801.491.3600

orders@fastfillsystems.com

www.fastfillsystems.com

To offer you a more engaging visual experience, some images in this catalog have been created using Artificial Intelligence (AI). For this reason, the visual appearance may vary slightly from the actual product; however, Fast Fill Systems guarantees that all technical information and data provided are 100% real and accurate.

ABOUT US

It started with a fuel nozzle.

Our story began in a small home garage, where Nozzle Tech, USA LLC repaired and rebuilt diesel fuel nozzles. Working with equipment that had already spent time in the field gave the business a practical starting point: understanding the products people relied on and the demands they faced every day.

Today, Fast Fill Systems brings that focus to fueling and fluid-transfer equipment for heavy-duty operations. From the nozzle in your operator's hands to the components on your tank, our products serve the people who keep equipment working.

Quality. Service. Innovation. These values connect our beginnings with the work we do today.



FIND WHAT YOU NEED


Start with the task. Find the right page.

Need a complete tank-side configuration, a replacement part or help identifying your system? Choose a starting point below. If you already have a part number, go straight to the part-number index.

[About Us](#)[Fuel Nozzles](#)[Rebuilds](#)[Fuel Receivers](#)[Pressureless](#)[Vents & Breathers](#)[Kits & Systems](#)[Fluid Couplers](#)[Matrix](#)[Glossary & Part Number Index](#)[Distributors](#)[How to Request a Quote](#)



FUEL NOZZLES

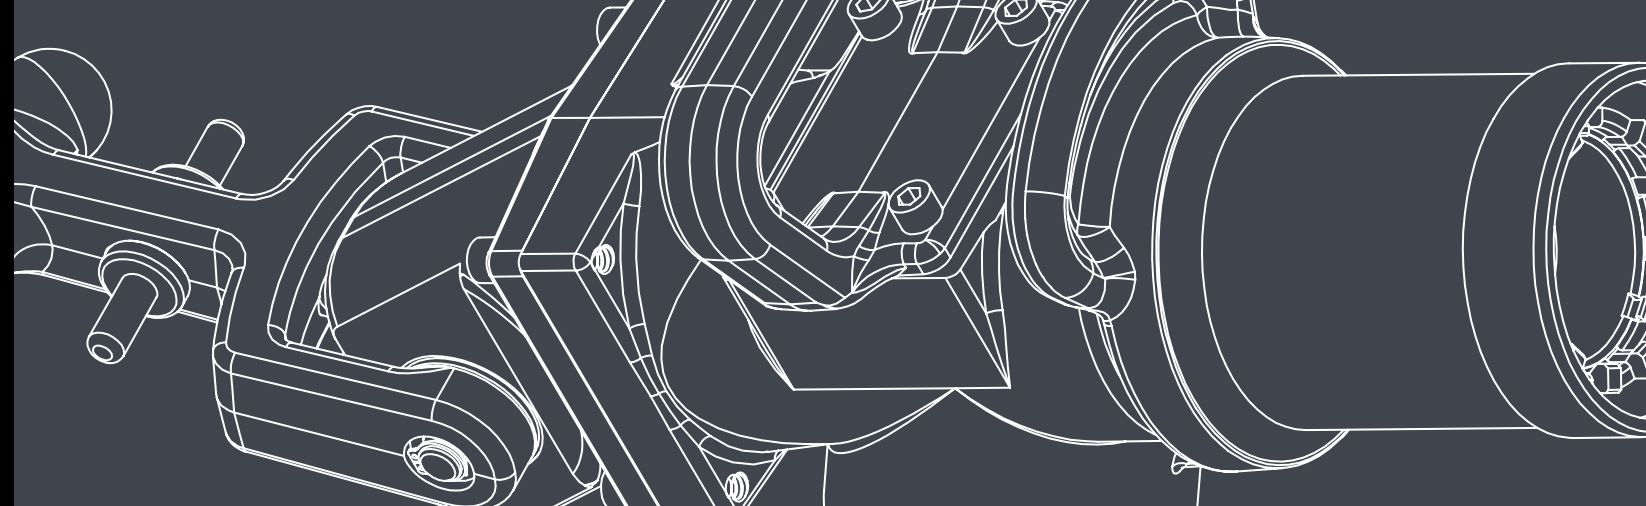

Make every fueling connection count.

Your operators handle a fuel nozzle every time a machine comes in to refuel. Its weight, grip and connection all become part of their working day. Fast Fill fuel nozzles bring together rugged construction and fast-fill functionality for demanding equipment and environments. Explore the range to find the handling characteristics, flow capacity and configuration that fit the way your operation works.



ATLAS

N150AT



Front End Plug
P150T


- Keeps the latching mechanism of the nozzle clean from dirt and grime for fast, clean coupling



150 GPM
FAST REFUELING (567 LPM)

BUILT FOR

- Mining equipment ·
- Construction equipment ·
- Fuel trucks ·
- Agriculture ·
- Rail ·
- Industrial fleets ·

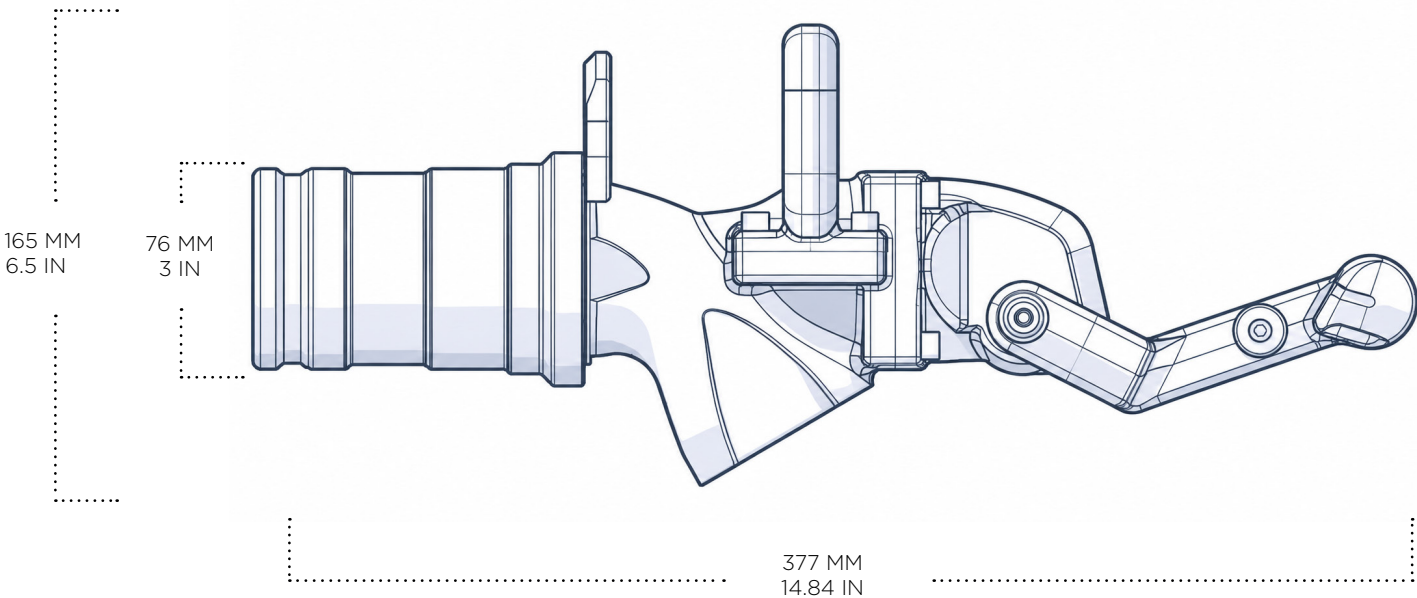

KEY SPECIFICATIONS

Parameter	Value
Model	N150AT
Minimum Flow	95 LPM / 25 GPM
Maximum Flow	567 LPM / 150 GPM
Maximum Operating Pressure	8.6 bar / 125 PSI
Fuel Port	1-1/2 in NPT
Latching Mechanism	12 stainless-steel ball bearings



View in room

Scan the QR code below to view this product in room virtually.




SURELOC

N150PSLp

150 GPM
FAST REFUELING (567 LPM)

BUILT FOR

- Mining equipment ·
- Construction equipment ·
- Fuel trucks ·
- Agriculture ·
- Rail ·
- Industrial fleets ·

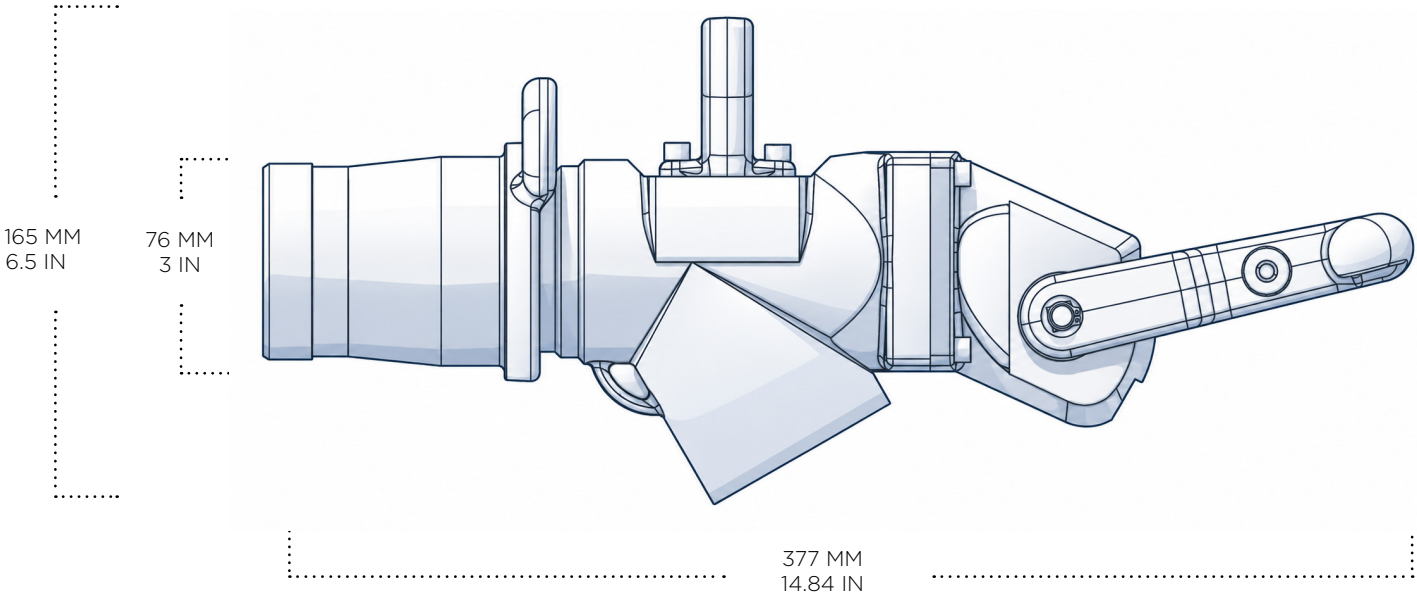

KEY SPECIFICATIONS

Parameter	Value
Model	N150PSLp
Minimum Flow	95 LPM / 25 GPM
Maximum Flow	567 LPM / 150 GPM
Maximum Operating Pressure	8.6 bar / 125 PSI
Fuel Port	1-1/2 in NPT
Latching Mechanism	12 stainless-steel ball bearings



View in room

Scan the QR code below to view this product in room virtually.

 **Front End Plug**
P150 - SureLoc

- Keeps the latching mechanism of the nozzle clean from dirt and grime for fast, clean coupling





PITBOSS

N150PBp

FUEL NOZZLES




-  **Front End Plug**
P150 - SureLoc 1000
- Keeps the latching mechanism of the nozzle clean from dirt and grime for fast, clean coupling



150 GPM
FAST REFUELING (567 LPM)

BUILT FOR

- Mining equipment ·
- Construction equipment ·
- Fuel trucks ·
- Agriculture ·
- Rail ·
- Industrial fleets ·

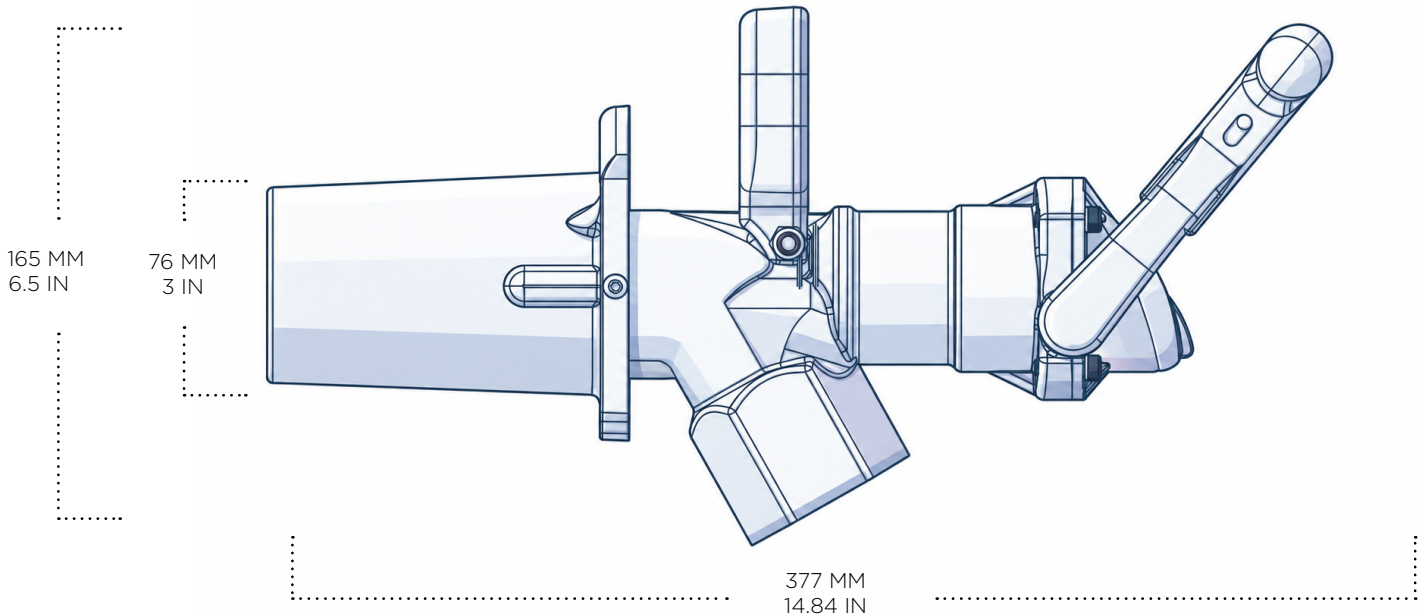

KEY SPECIFICATIONS

Parameter	Value
Model	N1000PSLp
Minimum Flow	567 LPM / 150 GPM
Maximum Flow	1,000 LPM / 264 GPM
Maximum Operating Pressure	8.6 bar / 125 PSI
Fuel Port	2 in NPT
Latching Mechanism	12 stainless-steel ball bearings



View in room

Scan the QR code below to view this product in room virtually.



ATICCUS

N1200ATT




The Atticus Heavy-Duty Nozzle (N1200ATT / VR300 Series) is engineered to endure and built to perform under the most adverse environmental conditions. Designed for high-volume fueling operations, it delivers up to 1200 liters per minute (317 GPM) while maximizing operator efficiency and ergonomics.

317 GPM
FAST REFUELING (1.200 LPM)

BUILT FOR

- Large mining equipment ·
- Heavy construction equipment ·
- Fuel trucks and service fleets ·

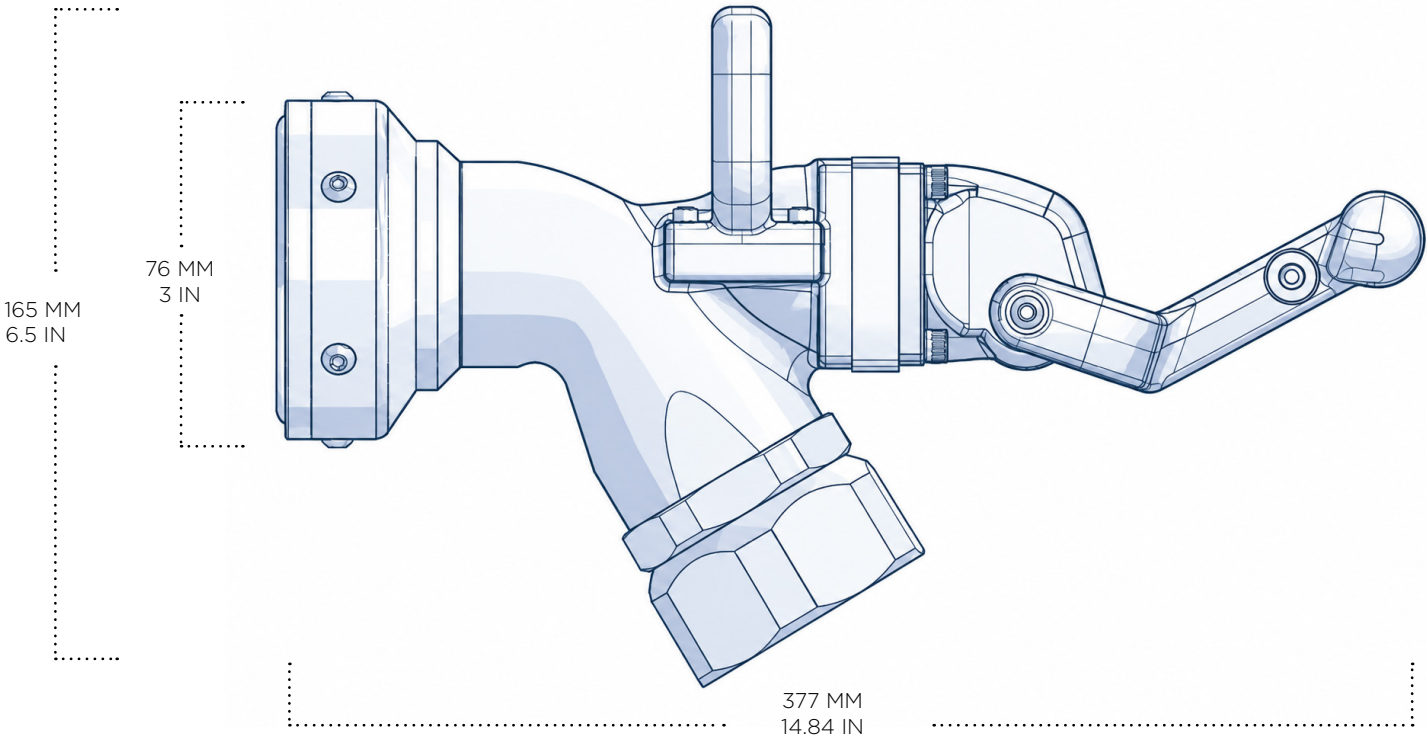

KEY SPECIFICATIONS

Parameter	Value
Model	Atticus N1200ATT / VR300
Minimum Flow	567 LPM / 150 GPM
Maximum Flow	1,200 LPM / 317 GPM
Maximum Operating Pressure	8.6 bar / 125 PSI
Fuel Port	2-1/2" NPT
Latching Mechanism	Dry Break / Quick Disconnect



View in room

Scan the QR code below to view this product in room virtually.



SURELOC 1000

N1000PSLp



Front End Plug
P150 - SureLoc 1000

- Keeps the latching mechanism of the nozzle clean from dirt and grime for fast, clean coupling




The SureLoc 1000 diesel fuel nozzle is designed for high-capacity equipment, delivering flow rates up to 1,000 LPM (264 GPM) when paired with the specified pressureless system. Its 2" NPT inlet supports high-flow fueling, while twelve stainless-steel ball bearings provide secure receiver engagement. A thick-wall, all-metal exterior and powder-coated, non-slip finish combine durability with confident handling in demanding mining and heavy-equipment applications.

264 GPM
FAST REFUELING (1,000 LPM)

BUILT FOR

- Mining equipment ·
- Construction equipment ·
- Fuel trucks ·
- Agriculture ·
- Rail ·
- Industrial fleets ·

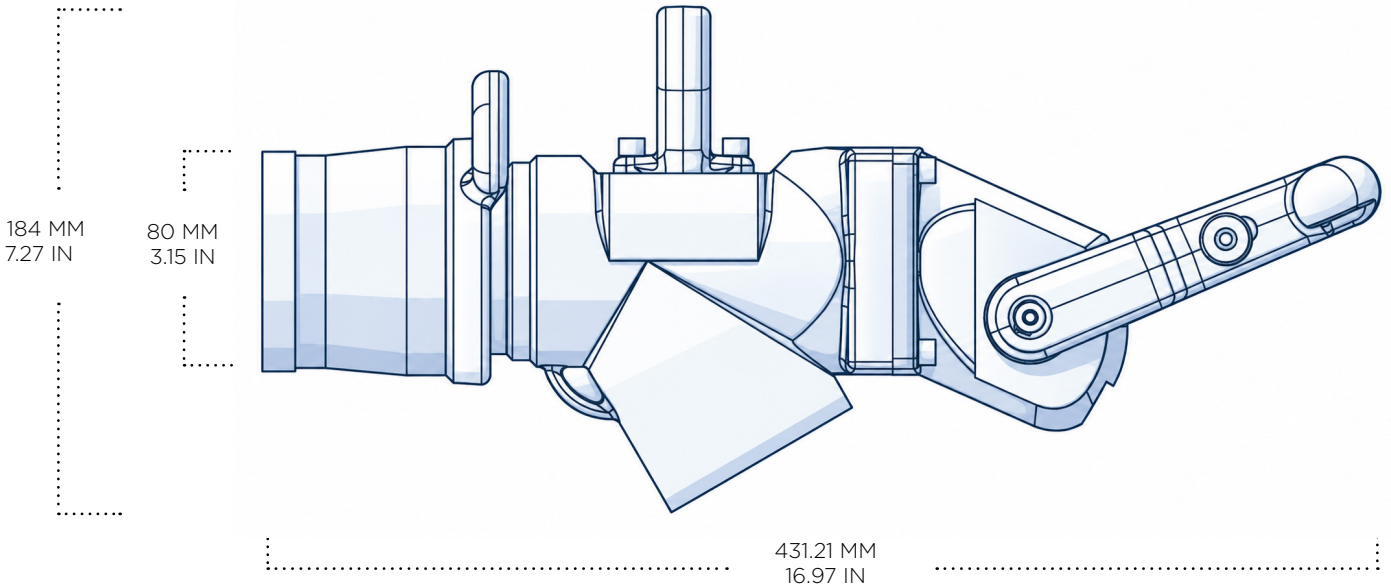

KEY SPECIFICATIONS

Parameter	Value
Model	N1000PSLp
Minimum Flow	567 LPM / 150 GPM
Maximum Flow	1,000 LPM / 264 GPM
Maximum Operating Pressure	8.6 bar / 125 PSI
Fuel Port	2 in NPT
Latching Mechanism	12 stainless-steel ball bearings



View in room

Scan the QR code below to view this product in room virtually.



ATLAS

N800AT




- **Front End Plug
P150T**
- Keeps the latching mechanism of the nozzle clean from dirt and grime for fast, clean coupling



211 GPM
FAST REFUELING (800 LPM)

BUILT FOR

- Mining equipment ·
- Construction equipment ·
- Fuel trucks ·
- Agriculture ·
- Rail ·
- Industrial fleets ·

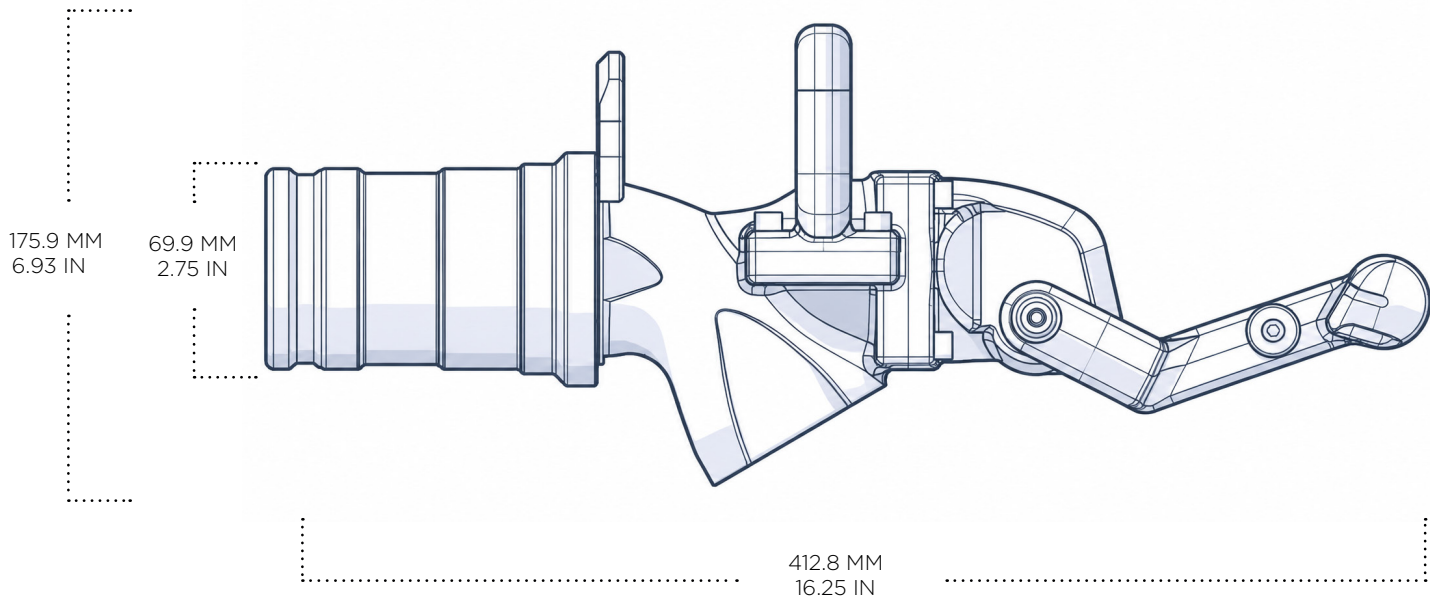

KEY SPECIFICATIONS

Parameter	Value
Model	N800ATp
Minimum Flow	95 LPM / 25 GPM
Maximum Flow	800 LPM / 211 GPM
Maximum Operating Pressure	8.6 bar / 125 PSI
Fuel Port	2 in FNPT
Latching Mechanism	12 stainless-steel ball bearings



View in room

Scan the QR code below to view this product in room virtually.



Fuel Adapter

Part No. A150A

Straight splash-fill adapter for directing fuel from a compatible Fast Fill nozzle into an open tank.

Configuration	Application
Straight	Open-tank filling



Fuel Adapter

Part No. A150C

Angled splash-fill adapter for directing fuel into an open tank where a 45-degree configuration suits access.

Configuration	Application
45°	Open-tank filling



Fuel Adapter

Part No. A150B

Angled splash-fill adapter for directing fuel into an open tank where a 90-degree configuration suits access.

Configuration	Application
90°	Open-tank filling




Breakaway Coupler

Part No. AB2

Hose breakaway coupler designed to separate under excessive pulling force, helping limit damage to the fueling connection.

Connection	Available Sizes
Female NPT	1 / 1-1/4 / 2 / 3 in



Straight Hose Swivel

Part No. S150 / S200 / S215 / S512

Aluminum swivels connect the fueling hose to the nozzle, allowing rotation to reduce hose twisting during handling.

Part No.	Female Connection	Male Connection
S150	1-1/2 in NPT	1-1/2 in NPT
S200	2 in NPT	2 in NPT
S215	1-1/2 in NPT	2 in NPT
S512	2 in NPT	1-1/2 in NPT

Replacement Fuel Nozzle Plug

Part No. P150

Protects the nozzle's front-end latching area from dirt and debris between fueling operations.

Material	Attachment
Aluminum	Aircraft cable




REBUILDS

Give your nozzle a new working life.

Daily fueling takes its toll on your equipment. Nozzle Tech’s rebuild service includes internal and external inspection, troubleshooting, and rebuilding with new parts, followed by polishing and powder coating. It’s a practical way to extend the service life of your nozzle and get it ready for the work ahead.



FUEL RECEIVERS

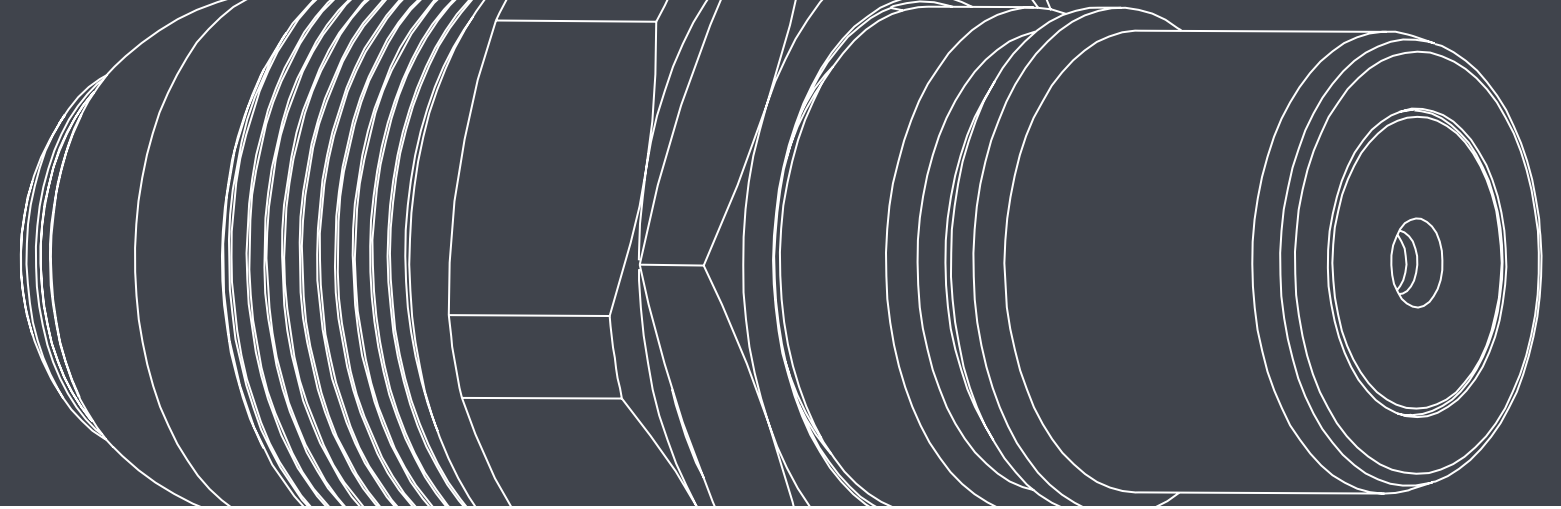

A dependable connection starts at the tank.

The receiver is where your fueling equipment meets the machine. It needs to stand up to repeated connections while matching the requirements of the nozzle and tank-side system. Fast Fill offers receiver options for different mounting, material and service needs, including check-valve configurations designed to allow receiver replacement without draining the tank. Find the connection that fits your installation and maintenance approach.



CHECK VALVE

R800CV

FUEL RECEIVERS




BUILT FOR

- Diesel equipment tanks
- Service-intensive fleets
- Mining and construction equipment

NO TANK DRAINING
FOR MATCHED RECEIVER REPLACEMENT

182 MM
7.166 IN

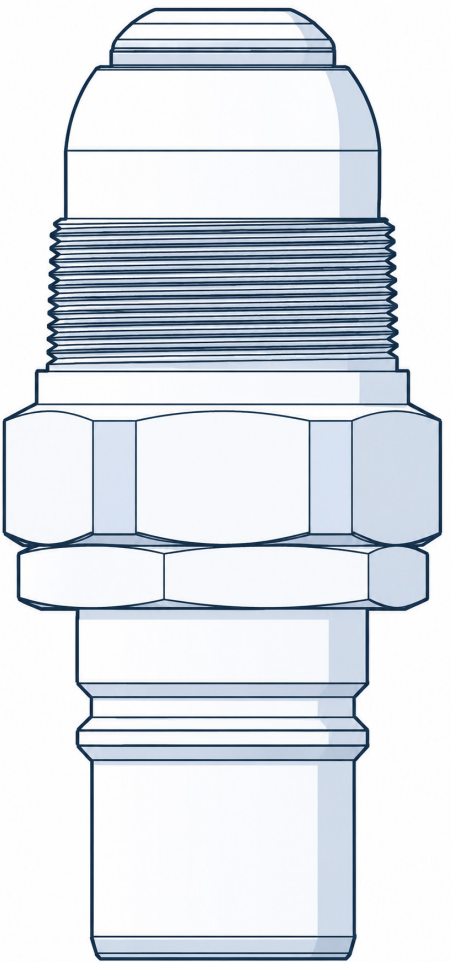

76.2 MM
3 IN

KEY SPECIFICATIONS

Parameter	Value
Model	R800CV
Maximum Flow	800 LPM / 211 GPM
Application	Diesel fueling
Valve Function	One-way check valve
Service Function	Receiver replacement without tank draining



View in room

Scan the QR code below to view this product in room virtually.



Standard Aluminum Receiver

Part No. R150A

All-aluminum receiver offered as an alternative to the steel version for applications specified for the standard receiver.

Material	Reference Application
Aluminum	R150S-A



Weld-On Flange

Part No. FFF4C

Creates a recessed fill point to help protect compatible receivers and tank inlet components from external contact.

Connection	Mounting
2 in FNPT	Weld-on



Replacement Receivers

For Check Valves & Shutoff Valves

Replacement receivers for check valve and shutoff valve assemblies. Allow receiver replacement without draining the fuel tank when installed with the corresponding valve assembly.

Part No.	Application
R150CVRc	Check valve
R150CVRc-J	Shutoff valve



Bolt-On Flange

Part No. FFF5C

Provides a recessed, protected fill point with bolt-on mounting for compatible receivers, check valves and pressureless shutoff valves.

Connection	Mounting
2 in FNPT	Bolt-on



Receiver Caps

Part No. C150 / C150A / C150BP

Protective caps help keep dirt and debris away from the fuel receiver connection between fueling operations. Available in plastic and aluminum, with a plastic option for flange-mounted receivers.

Part No.	Material	Application
C150	Plastic	Fuel receiver
C150A	Aluminum	Fuel receiver
C150BP	Plastic	Flange-mounted receiver



Deep Socket Tool

Part No. R150SW

Deep socket tool for installing new receivers and removing worn or damaged receivers from the tank connection.

Socket Size	Function
2-1/2 in	Installation and removal



Check Valve Evacuation Tool

Part No. R150CVEP

Provides an evacuation connection for draining fuel from compatible shutoff valve and check valve assemblies.

Function	Application
Tank draining	Matched valve assembly



Check Valve Wrench

Part No. R150CVSW

Service wrench for check valve installation and removal, with an open-back design for use with the R150SW socket.

Companion Tool	Design
R150SW	Open back



STANDARD RECEIVER


R150Sc-A



BUILT FOR

- Mining equipment ·
- Construction equipment ·
- Agricultural equipment ·
- Diesel fleets ·

**SOLID
STEEL**
NICKEL-PLATED FOR REPEATED COUPLING

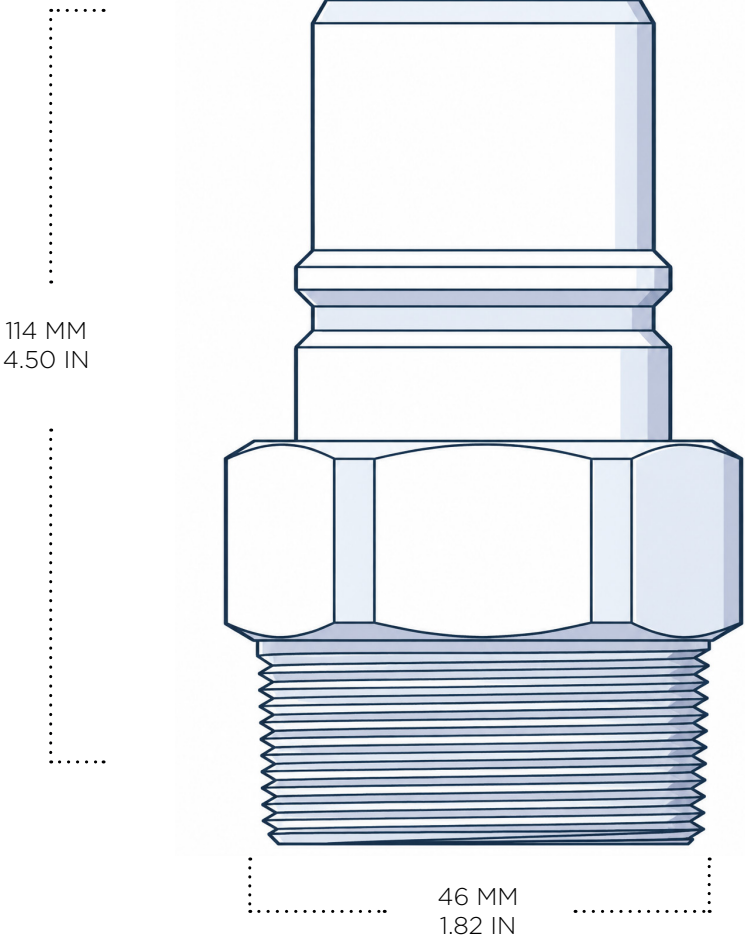

KEY SPECIFICATIONS

Parameter	Value
Model	R150Sc-A
Maximum Flow	800 LPM / 211 GPM
Maximum Operating Pressure	8.6 bar / 125 PSI
Tank Installation Thread	2 in NPT
Construction	Nickel-plated steel
Standard Shutoff Option	9 PSI configuration
Protective Cap	Plastic cap included



View in room

Scan the QR code below to view this product in room virtually.



Standard Fuel Receiver

Part No. R150Sc-B

For applications requiring a lower tank shutoff pressure.

Spring Rating	Poppet Color
7 PSI / 0.48 bar	Red



Standard Fuel Receiver

Part No. R150Sc-E

For installations with particularly high static head or back pressure.

Spring Rating	Poppet Color
13.5 PSI / 0.93 bar	Purple



Standard Fuel Receiver

Part No. R150Sc-D

For installations with high static head or back pressure.

Spring Rating	Poppet Color
11 PSI / 0.76 bar	Blue



Standard Fuel Receiver

Part No. R150Sc-J

Designed exclusively for use with pressureless fueling systems.

Spring Rating	Poppet Color
13.5 PSI / 0.93 bar	Green




PRESSURELESS



36

Fast Fill Systems

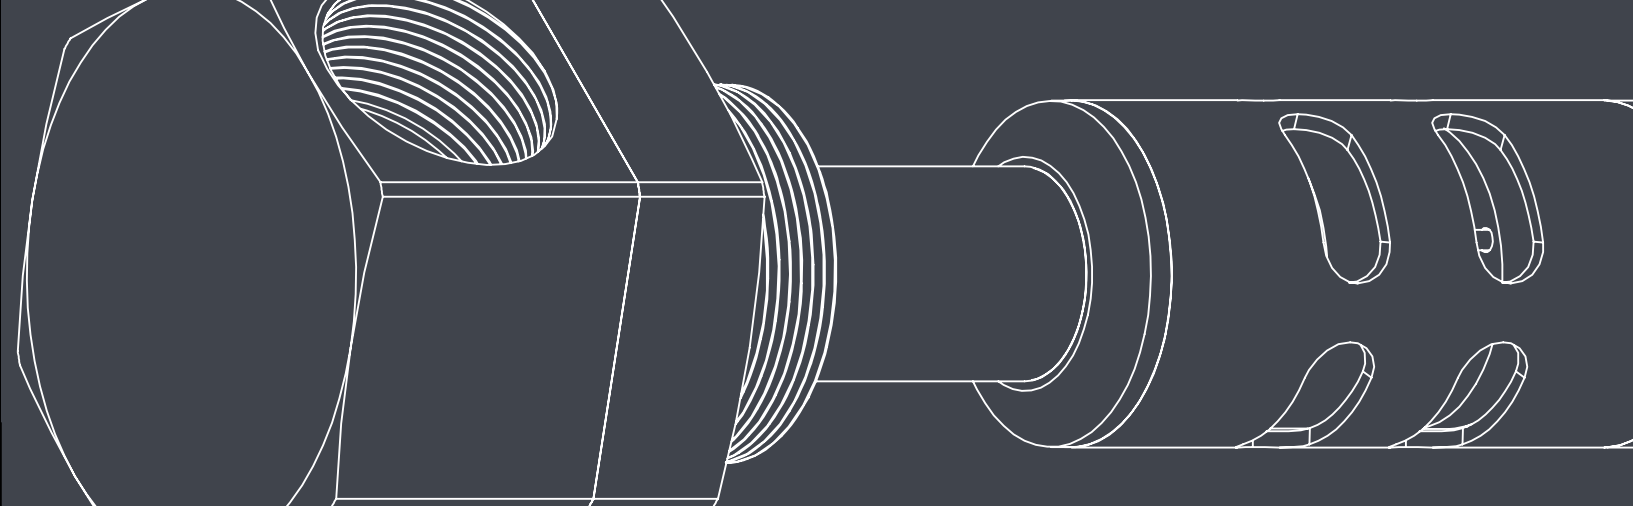

Lose the pressure. Not the performance.

Pressureless fill systems bring unique advantages to fast delivery of fuel and other fluids. The benefit is that your tank is protected from the internal pressures that are typically required to shut off a pressure-sensitive nozzle. In these Fast Fill systems, the pressure is isolated within the level control and signal lines to alleviate unnecessary strain on the tank walls. The level controllers are adjustable for higher or lower shutoff levels, according to your specific needs. Finally, in the two-part level control/shutoff valve, the fuel receiver can be replaced without the need to drain your tank, as it serves as a check valve to hold back the tank's fluid.

Keep Fueling

37



HIGH FLOW PRESSURELESS


PLA-M SV



Fill large tanks at high flow without using tank pressurization as the shutoff signal. Paired with the SureLoc 1000 nozzle, a system equipped with the PLA-M SV shutoff valve supports flow rates up to 1,000 LPM. The level control sets the target fill level and transmits a hydraulic signal to close the inlet shutoff valve, while internal or external signal-line connections provide installation flexibility. The shutoff valve also allows the receiver to be serviced without draining the tank.

BUILT FOR

- Large diesel tanks ·
- Mining equipment ·
- High-volume equipment fueling ·

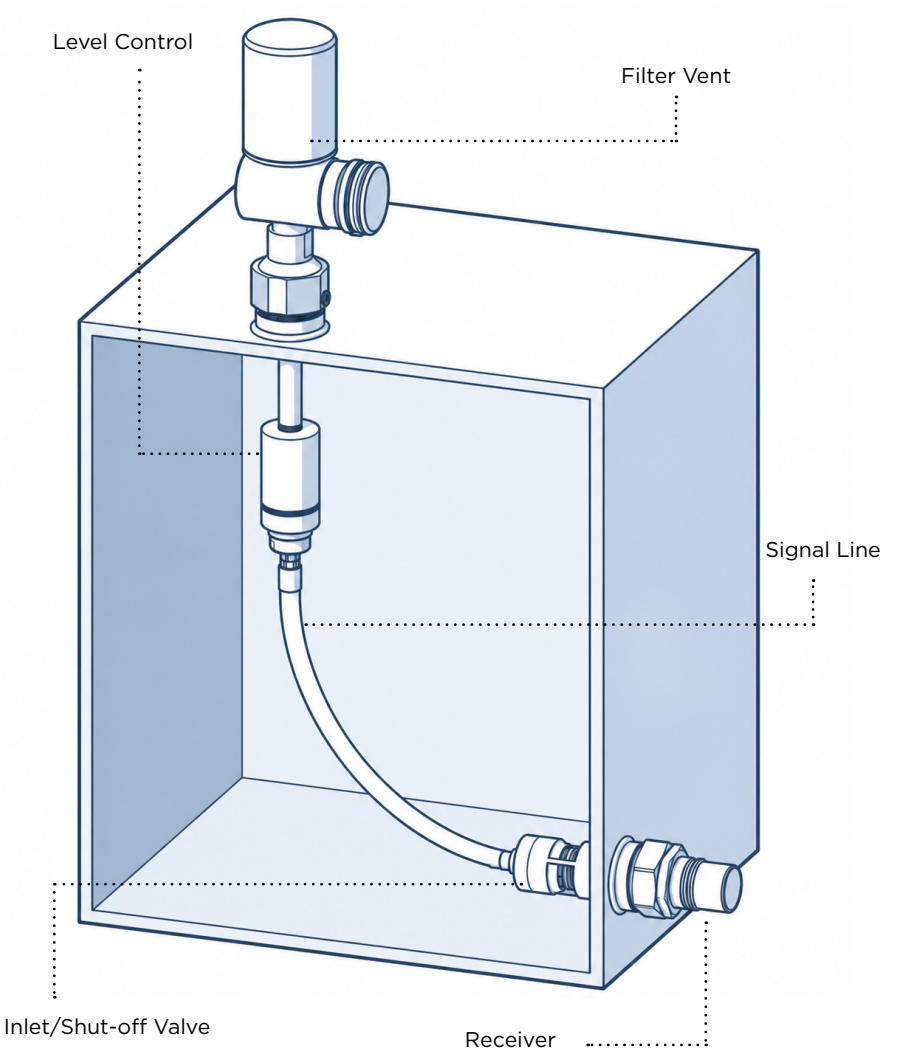

1000 LPM
PRESSURELESS FILLING
WITH SURELOC 1000

KEY SPECIFICATIONS

Parameter	Value
System	PLA-M SV
Maximum System Flow	1,000 LPM / 264 GPM*
Maximum Operating Pressure	8.6 bar / 125 PSI**
Tank Installation Thread	2 in NPT
Level Control	Adjustable automatic shutoff
Signal-Line Routing	Internal or external
Required Nozzle	SureLoc 1000 — N1000PSLp

* With the N1000PSLp nozzle and a correctly sized installation.
** Component operating limit; not an allowable tank pressure.



View in room

Scan the QR code below to view this product in room virtually.



SMALL TANK PRESSURELESS

PLA 80-VSC

PRESSURELESS




ONE TANK PORT

FILL AND VENT THROUGH ONE OPENING

BUILT FOR

- Agricultural equipment ·
- Compact construction ·
- equipment ·
- Transit fleets ·
- Multi-tank installations ·

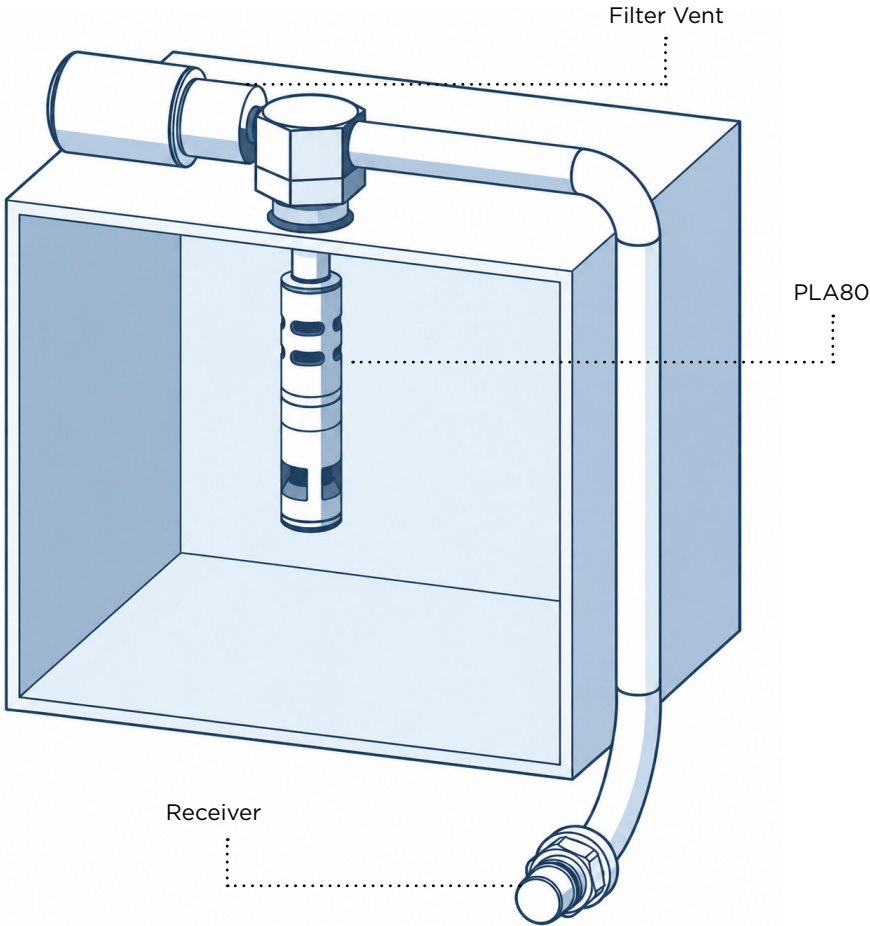

KEY SPECIFICATIONS

Parameter	Value
System	PLA80 / PLA80-SVLC
Tank Installation Thread	2 in NPT
Fluid Inlet Thread	1-1/4 in FNPT
Vent Port Thread	1 in FNPT
Level Control	Adjustable automatic shutoff
Tank Configuration	Single tank or configured multi-tank system
Venting Options	Low-profile or remote filter vent



View in room

Scan the QR code below to view this product in room virtually.



Bellhousing Replacement Shutoff Valve

Part No. PLA150-M SVEBH

Flange-mounted inlet shutoff valve designed to replace the FFF5C bolt-on bellhousing in the specified pressureless installation.

Mounting	Signal Connection
6-bolt flange	External #6 JIC



Code 61 Inlet Shutoff Valve

Part No. PLA150-M SV61-E

Flange-mounted shutoff valve with a Code 61 hose connection for installations using a remotely mounted receiver.

Hose Connection	Signal Connection	Mounting
2 in Code 61	External #6 JIC	6-bolt flange



Remote Mount Cam

Part No. PLA150-M RRM2

Allows the shutoff valve and receiver assembly to be mounted remotely to suit the equipment's fueling layout.

Included Receiver	Signal Connection
R150CVRc-J	External #6 JIC



Direct-Mount Inlet Shutoff Valve

Part No. PLA150-M SVFE

Flange-mounted shutoff valve supplied with a two-piece direct-mount receiver and an external hydraulic signal-line connection.

Mounting	Signal Connection	Includes
6-bolt flange	External #6 JIC	Two-piece receiver



Receiver Flange

Part No. PLA150-M VF

Six-bolt flange for the specified CAT mounting interface in compatible pressureless system installations.

Reference Size	Bolt Count
120 mm	6



Receiver Flange

Part No. PLA150-M RF

Receiver flange with an NPT connection for the specified six-bolt CAT mounting arrangement.

Connection	Bolt Count	CAT Reference
2 in NPT	6	221-5303



Evacuation Port

Part No. PLA150-M EP

Provides an evacuation connection for draining fuel from compatible shutoff valve and check valve assemblies.

Function
Tank draining



Hydraulic Signal Line



Part No. PL-P-6 / PL-P-6-C /PL-P-6-B

Stainless-steel braided signal line with a PTFE liner for transmitting the hydraulic shutoff signal in internal or external installations.

Part No.	Length	Construction
PL-P-6	10 ft / 3.05 m	PTFE liner / stainless braid
PL-P-6-C	6 ft / 1.83 m	PTFE liner / stainless braid
PL-P-6-B	3 ft / 0.91 m	PTFE liner / stainless braid



FUEL VENTS

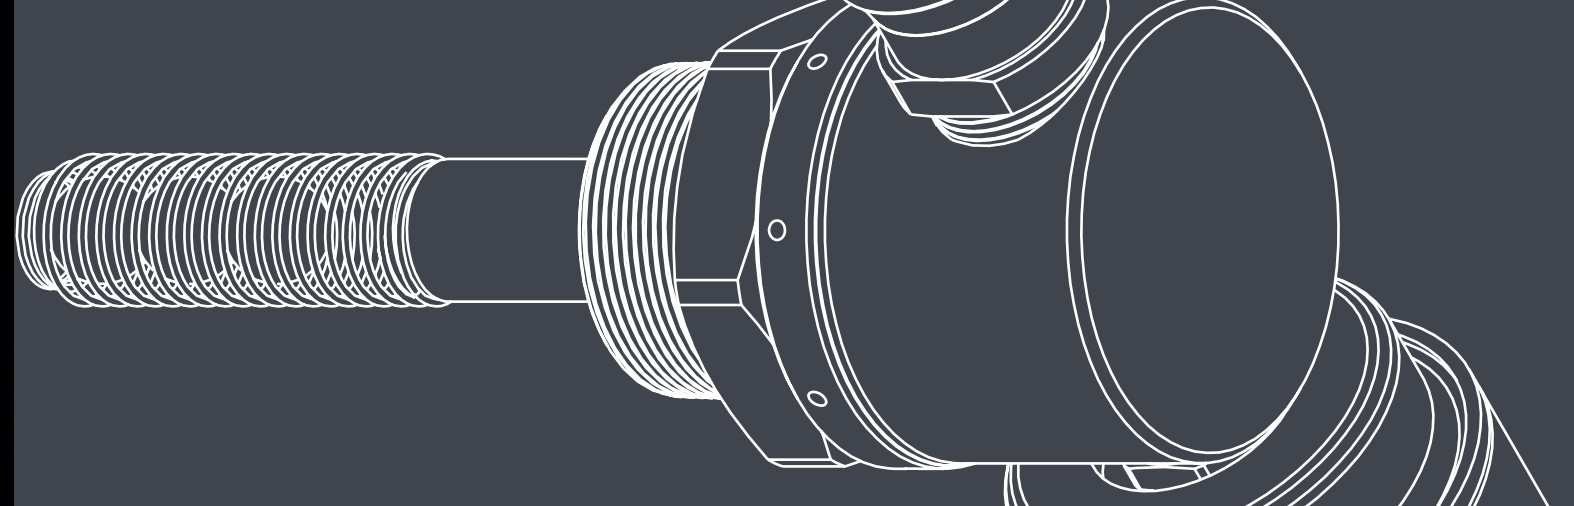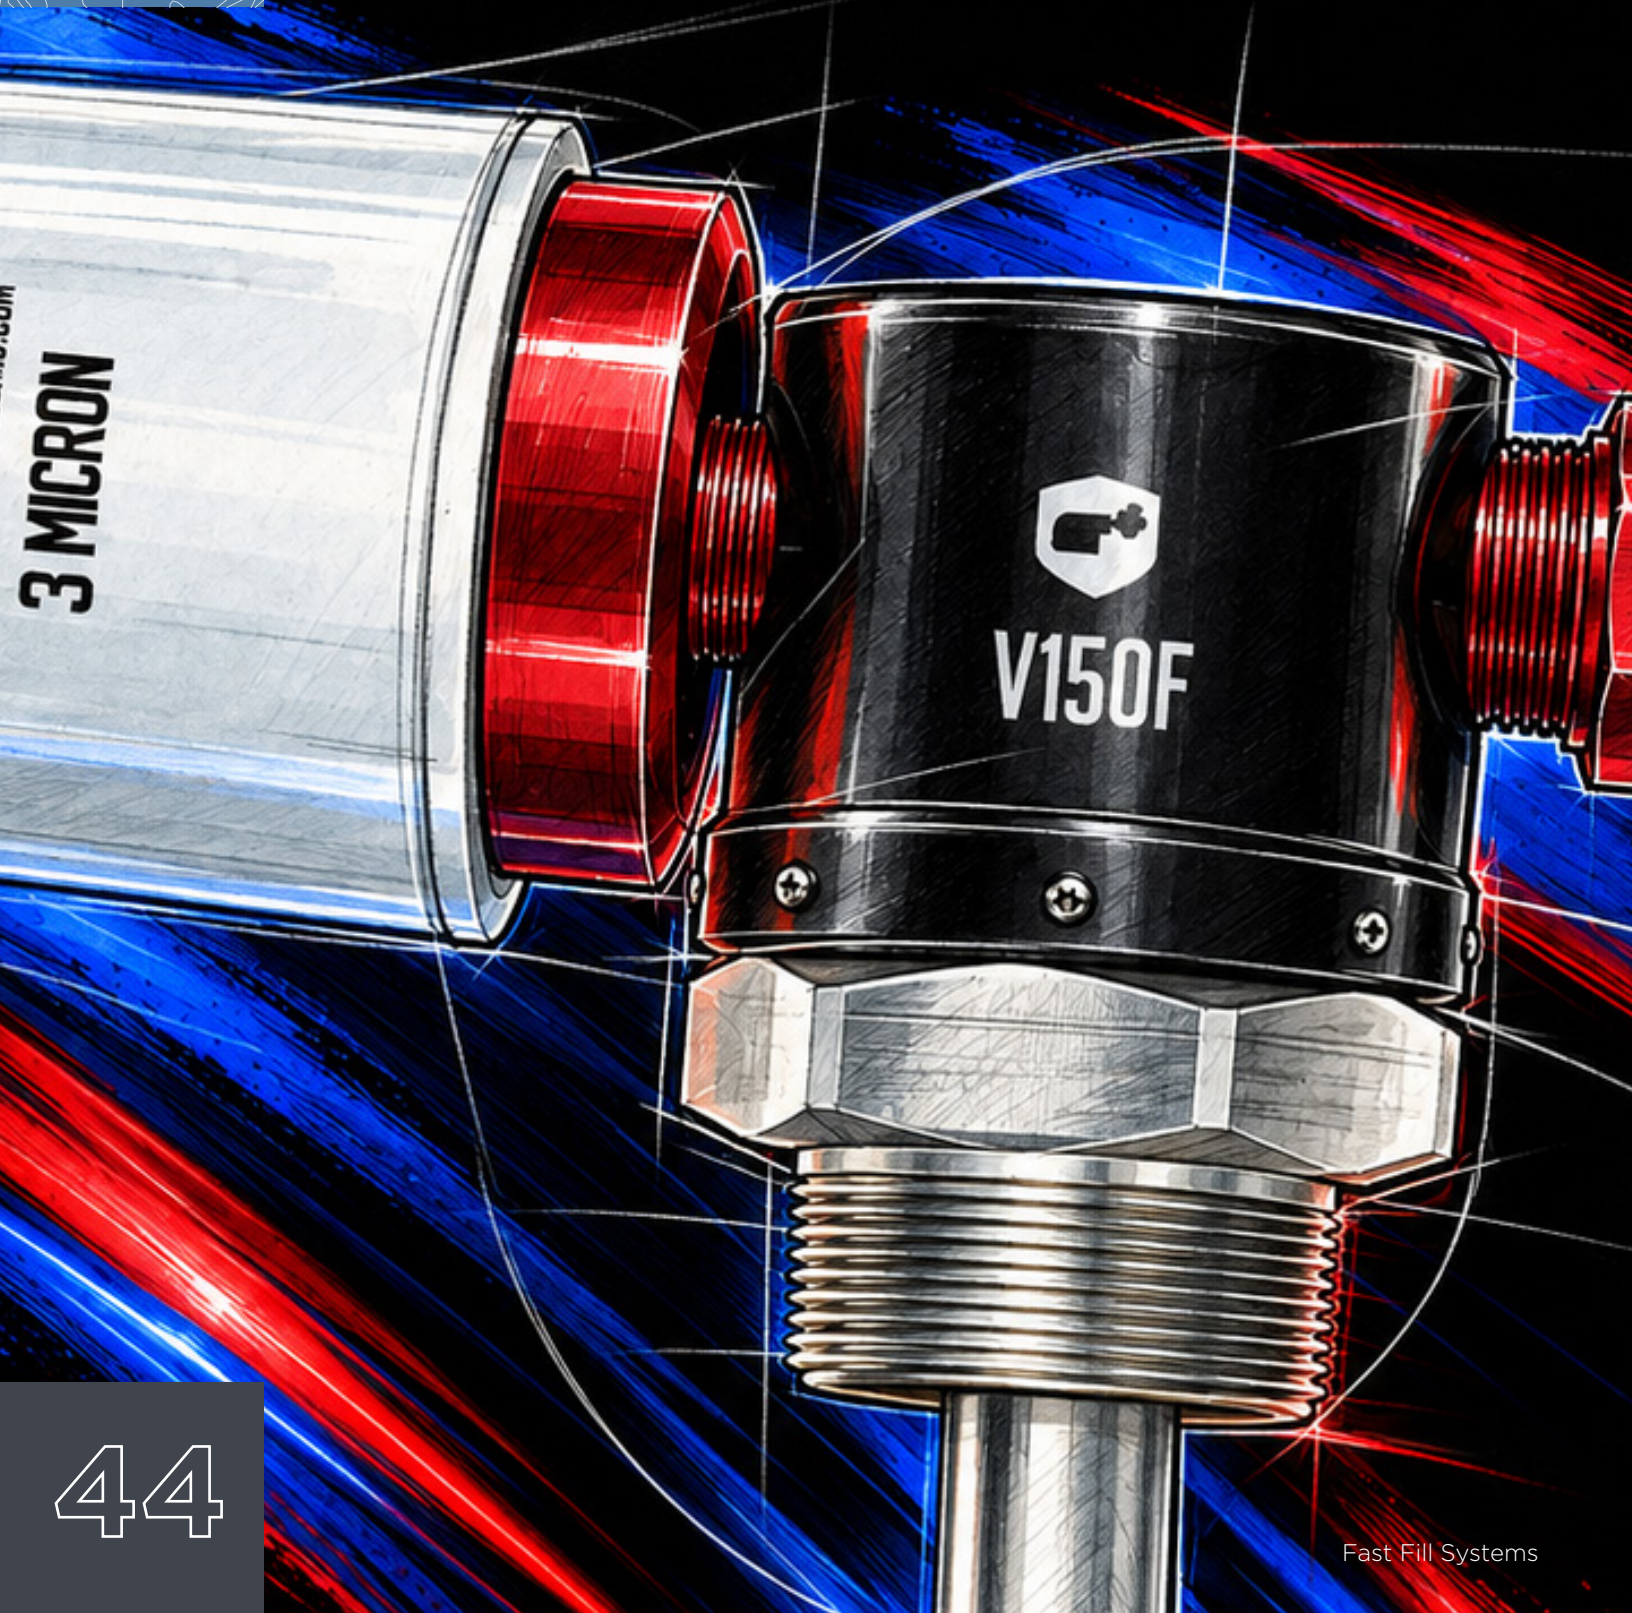

Control what you can't see.


Vents, or breathers as they are commonly known, are another important component in a smoothly functioning fuel system. Vents play a vital role in the fill level and shutoff of your tank; however, they provide the easiest access point for dust and contaminants to enter your fuel system. Our filtered vents make use of check valves to ensure that outgoing air bypasses the filter, and incoming air is channeled through it. Fast Fill Systems pressurized vents also serve a dual purpose as a fail-safe pressure relief valve. Correct venting is pivotal in high-volume fueling.

FILTERED FUEL VENT

FILTERED FUEL VENT
V150F



Help keep airborne dirt out of the fuel tank with filtered breathing for pressurized fueling systems. The V150F directs incoming air through a 3-micron filter, while outgoing air and fuel vapor leave through a one-way valve. Available stem lengths support different fill-level requirements, combining tank venting, filtration and level control in a single assembly.

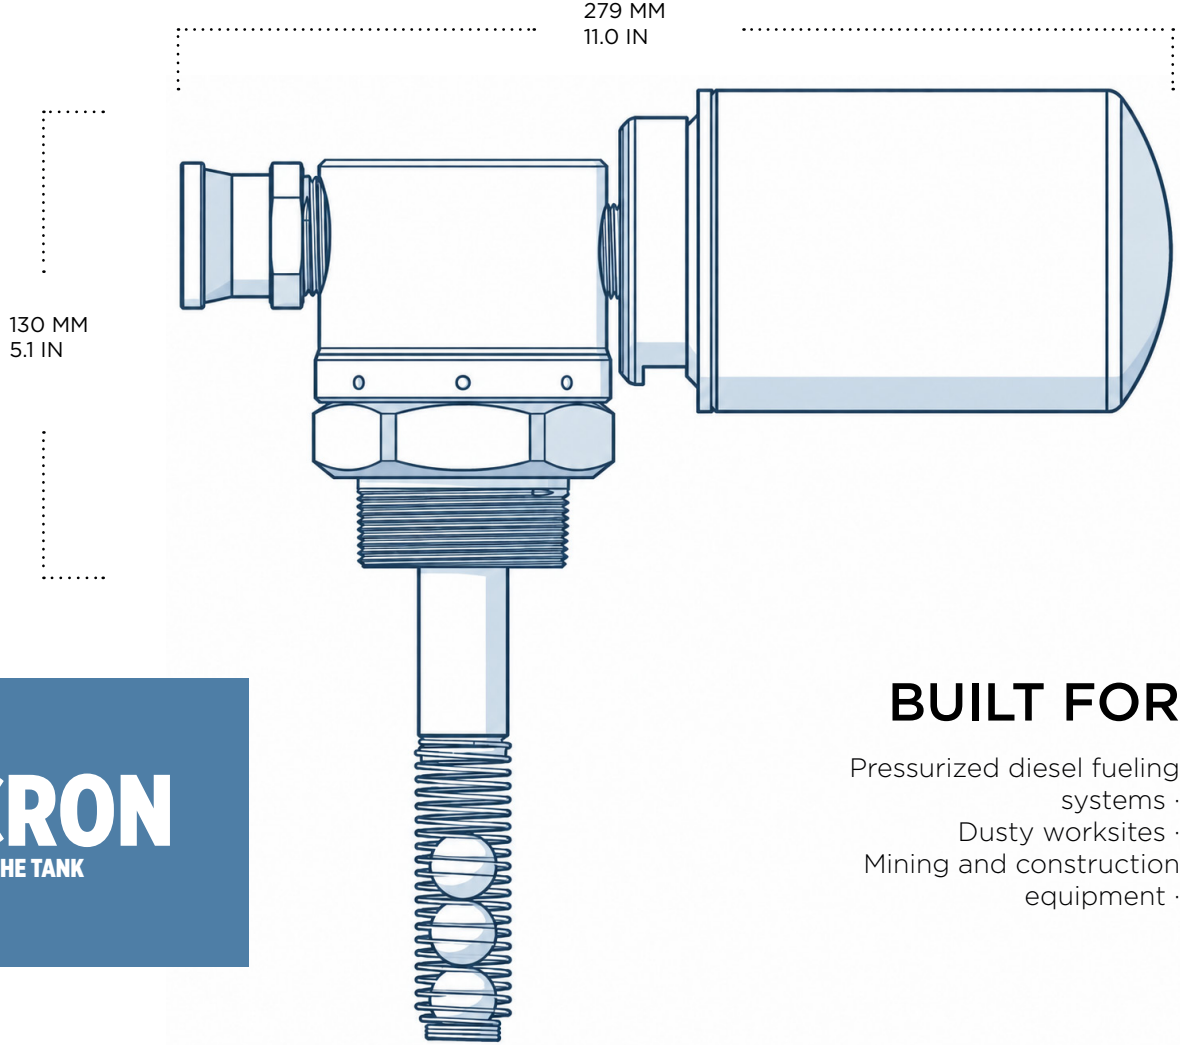

3 MICRON
FILTERED AIR INTO THE TANK

BUILT FOR

- Pressurized diesel fueling systems ·
- Dusty worksites ·
- Mining and construction equipment ·

KEY SPECIFICATIONS

Parameter	Value
Model	V150F
System Type	Pressurized fueling
Tank Installation Thread	2 in NPT
Air Filter Rating	3 micron
Published Relief Pressure	13 PSI / approximately 0.90 bar
Level-Control Stem	5 in standard; 7 in or 12 in optional
Replacement Filter	FFV-MF



View in room

Scan the QR code below to view this product in room virtually.



Remote-Mount Filter Vent

Part No. FFV150

Provides filtered tank breathing from a remote mounting location, with a universal bracket for installation flexibility.

Mounting	Connection	Includes
Remote	Hose barb	Mounting bracket



High-Volume Vacuum Break

Part No. FFV150-HV IR1

Filtered vent with a high-volume check valve designed to provide increased airflow area for the specified installation.

Inlet Connection	Valve Type
1 in NPT	High-volume check valve



Direct-Mount Filter Vent

Part No. FFV150-PL

Provides filtered tank breathing through a direct connection to the compatible pressureless level-control assembly.

Connection	Mounting
1 in NPT	Direct



Low-Profile Filter Vent

Part No. FFV150-LP

Provides filtered tank breathing in a low-profile arrangement for installations with limited space above the tank.

Mounting	System Type
Low profile	Pressureless



Replacement Inlet Air Filter

Part No. FFV-MF

Replacement filter element for compatible filtered vents, helping limit airborne contamination entering the tank.

Filter Rating	Filtered Medium
3 µm	Air

 **STANDARD
FUEL VENT**

V150




BUILT FOR

- Pressurized diesel fueling systems ·
- Tank retrofits ·
- Heavy equipment ·

**SET THE
FILL LEVEL**
STEM OPTIONS FOR YOUR INSTALLATION

The V150 provides the venting and level-control function used in a traditional pressurized fast-fill system. Air escapes as fuel enters the tank. When fuel reaches the configured level, the vent closes so tank pressure can activate the matched nozzle’s shutoff. Different stem lengths allow the installation to be configured for the required fill level.

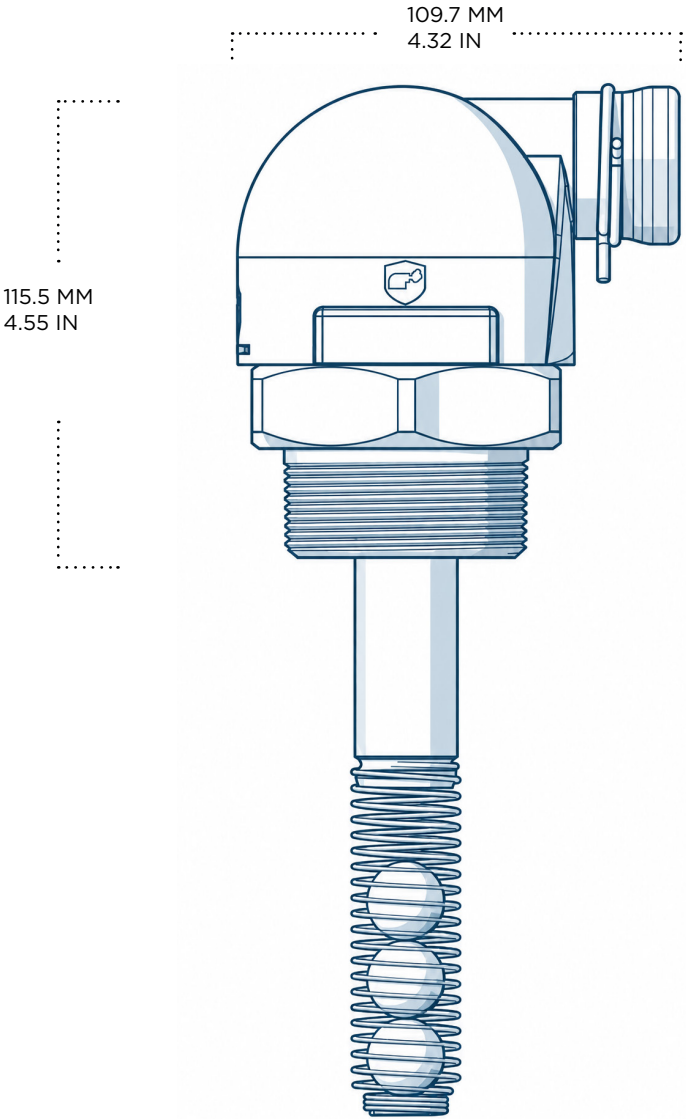

KEY SPECIFICATIONS

Parameter	Value
Model	V150
System Type	Pressurized fast-fill fueling
Primary Function	Tank venting and fill-level control
Standard Stem Length	5 in / 127 mm
Optional Stem Lengths	7 in / 178 mm; 12 in / 305 mm
Shutoff Method	Vent closure enables pressure-based nozzle shutoff



View in room

Scan the QR code below to view this product in room virtually.



Fuel Vent with Bolt-On Flange

Part No. V150B

Fuel vent configuration for tanks without an existing NPT port, using a bolt-on flange for mounting.

Flange Connection	Includes	Bolts
2 in NPT	Flange / nitrile gasket	Not included



Fuel Vent with Half Coupling

Part No. V150A

Fuel vent configuration for retrofit installations requiring a welded threaded connection on the tank.

Coupling Connection	Coupling Material	Mounting
2 in FNPT	Steel	Weld-on coupling



Fuel Vent with Whistle Adapter

Part No. V150W

Provides an audible signal as tank pressure rises during fueling, alerting the operator to the expected nozzle shutoff.

Whistle Range
5-7 PSI / 0.34-0.48 bar



High-Flow Fuel Vent

Part No. V150H

Vent option for installations with higher fuel delivery rates, subject to matching the complete tank and fueling system.

Published Fueling Range
Above 150 to 300 GPM



Safety Relief Fuel Vent

Part No. V150SR

Provides an additional relief function alongside the V150 in installations specified for supplementary tank pressure relief.

Cracking Pressure	Companion Vent
13 PSI / 0.90 bar	V150



Fuel Vent with NPT Adapter

Part No. V150C

Vent configuration with a threaded swivel adapter for connecting a hose at the vent-cap opening.

Adapter Connection	Connection Location
1 in FNPT	Vent-cap opening



Fuel Vent with Anti-Vandalism Flange

Part No. V150D

Protected mounting arrangement designed to help deter unauthorized removal of the vent from the tank.

Mounting	Bolts
Locking flange arrangement	Not included

COMPLETE SYSTEM

PRESSURELESS SYSTEMS



INSTALLED CONFIGURATION

Controlled filling. Less tank stress.

Bring the fill connection, level control and tank venting together in one coordinated fueling system. Fast Fill Systems pressureless technology uses a hydraulic signal to close the inlet shutoff valve at the selected fuel level, without relying on tank pressurization to trigger shutoff. An adjustable level control sets the fill point, while a matched filter vent lets the tank breathe. In the two-part level-control and shutoff-valve arrangement, the receiver can be replaced without draining the tank.

ADJUSTABLE FILL LEVEL

Set the shutoff point to suit the tank installation.

FLEXIBLE INSTALLATION

Position the fill connection and level control to suit the equipment.

SIMPLER RECEIVER SERVICE

Replace the matched receiver without draining the tank.

CONFIGURED AROUND YOUR TANK

Each component has a clear role. Fuel enters through the receiver and shutoff valve while displaced air exits through the vent. When fuel reaches the selected level, the level control sends a hydraulic signal that closes the inlet valve and stops filling.

The shutoff signal stays within the control circuit, so the tank does not need to be pressurized to stop fuel delivery.

FILL	DETECT	STOP
Fuel enters.	The level control	The hydraulic signal
Displaced	responds at the	closes the inlet
air leaves.	selected fill level.	shutoff valve.

R150CVRc-J

Provides the nozzle connection at the inlet shutoff-valve assembly.

FFV150-PL

Allows displaced air to escape during filling and filters incoming air as the tank breathes.

PLA-M VLCE


Detects the selected fuel level and initiates the hydraulic shutoff signal.

PLA-M SV

Allows fuel into the tank during filling and closes when it receives the shutoff signal.

PL-P-6

Carries the hydraulic signal from the level control to the inlet shutoff valve.

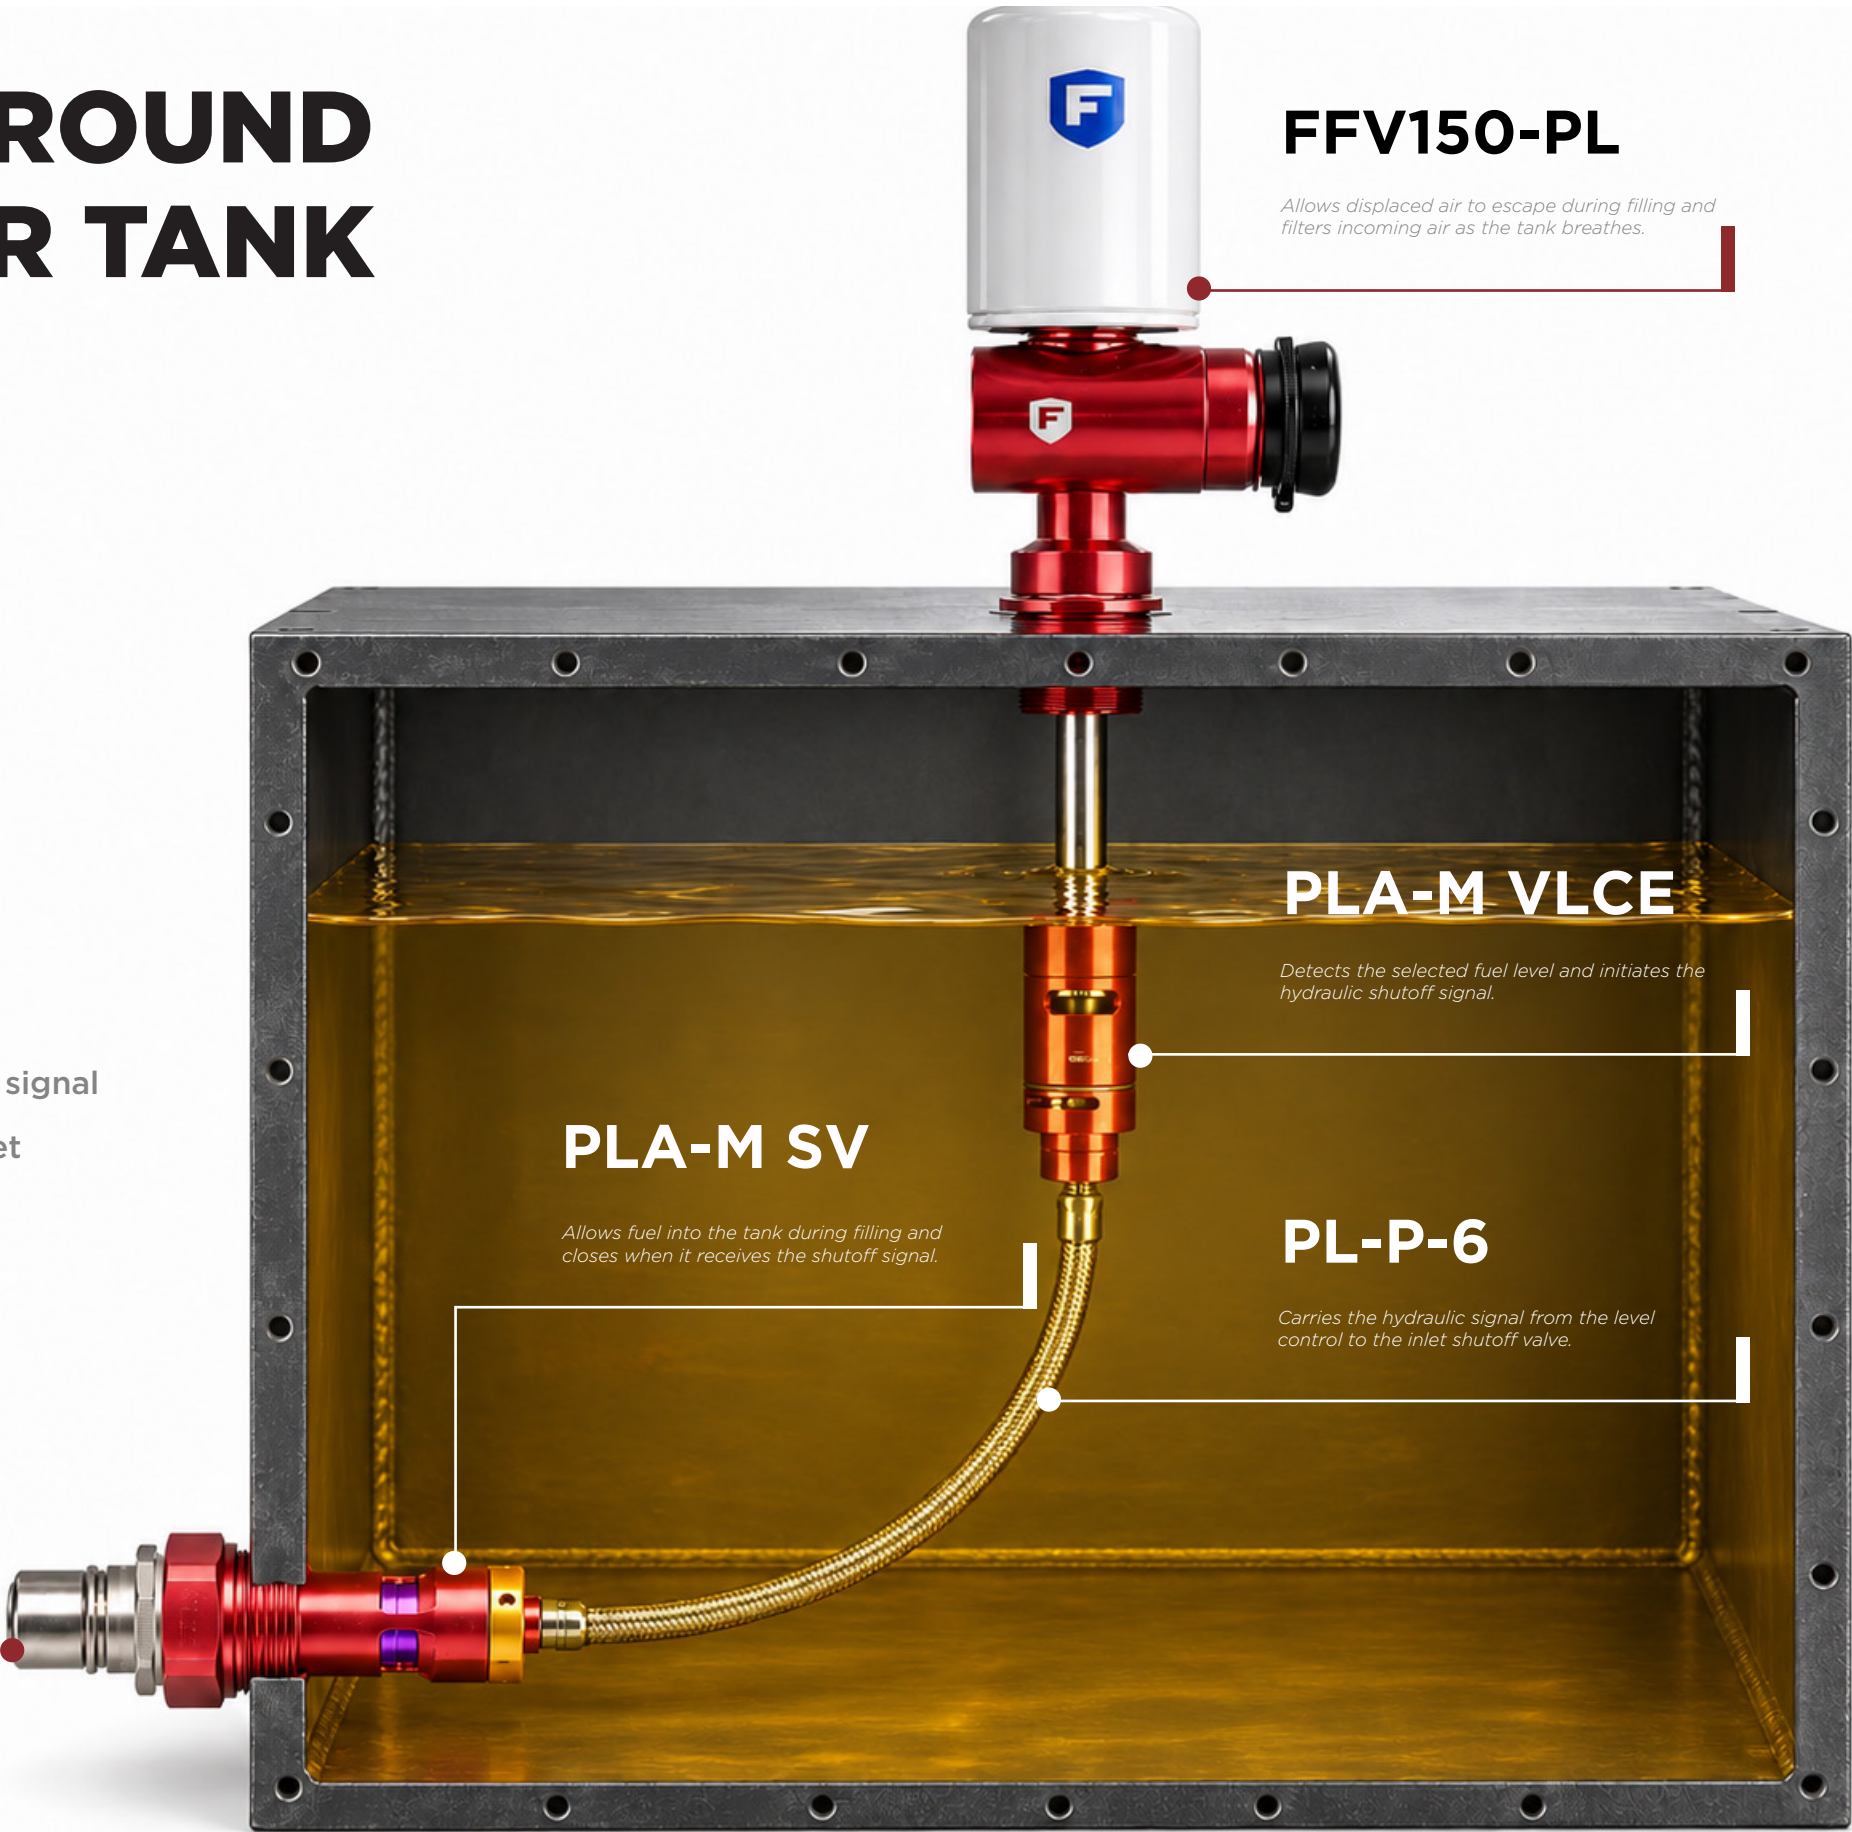

FFV150-LP


Allows displaced air to escape during filling and filters incoming air as the tank breathes.

COMPACT SYSTEM.
CONTROLLED FILLING.

Fuel travels from the receiver through the fill pipe to the PLA80 assembly. As the tank fills, displaced air leaves through the vent connection and FFV150-LP filter vent.

When fuel reaches the selected level, the integrated control stops incoming flow. Filling and venting share the same tank opening, simplifying the tank layout.

Typical installation shown. Receiver, piping and mounting hardware must be matched to the application.

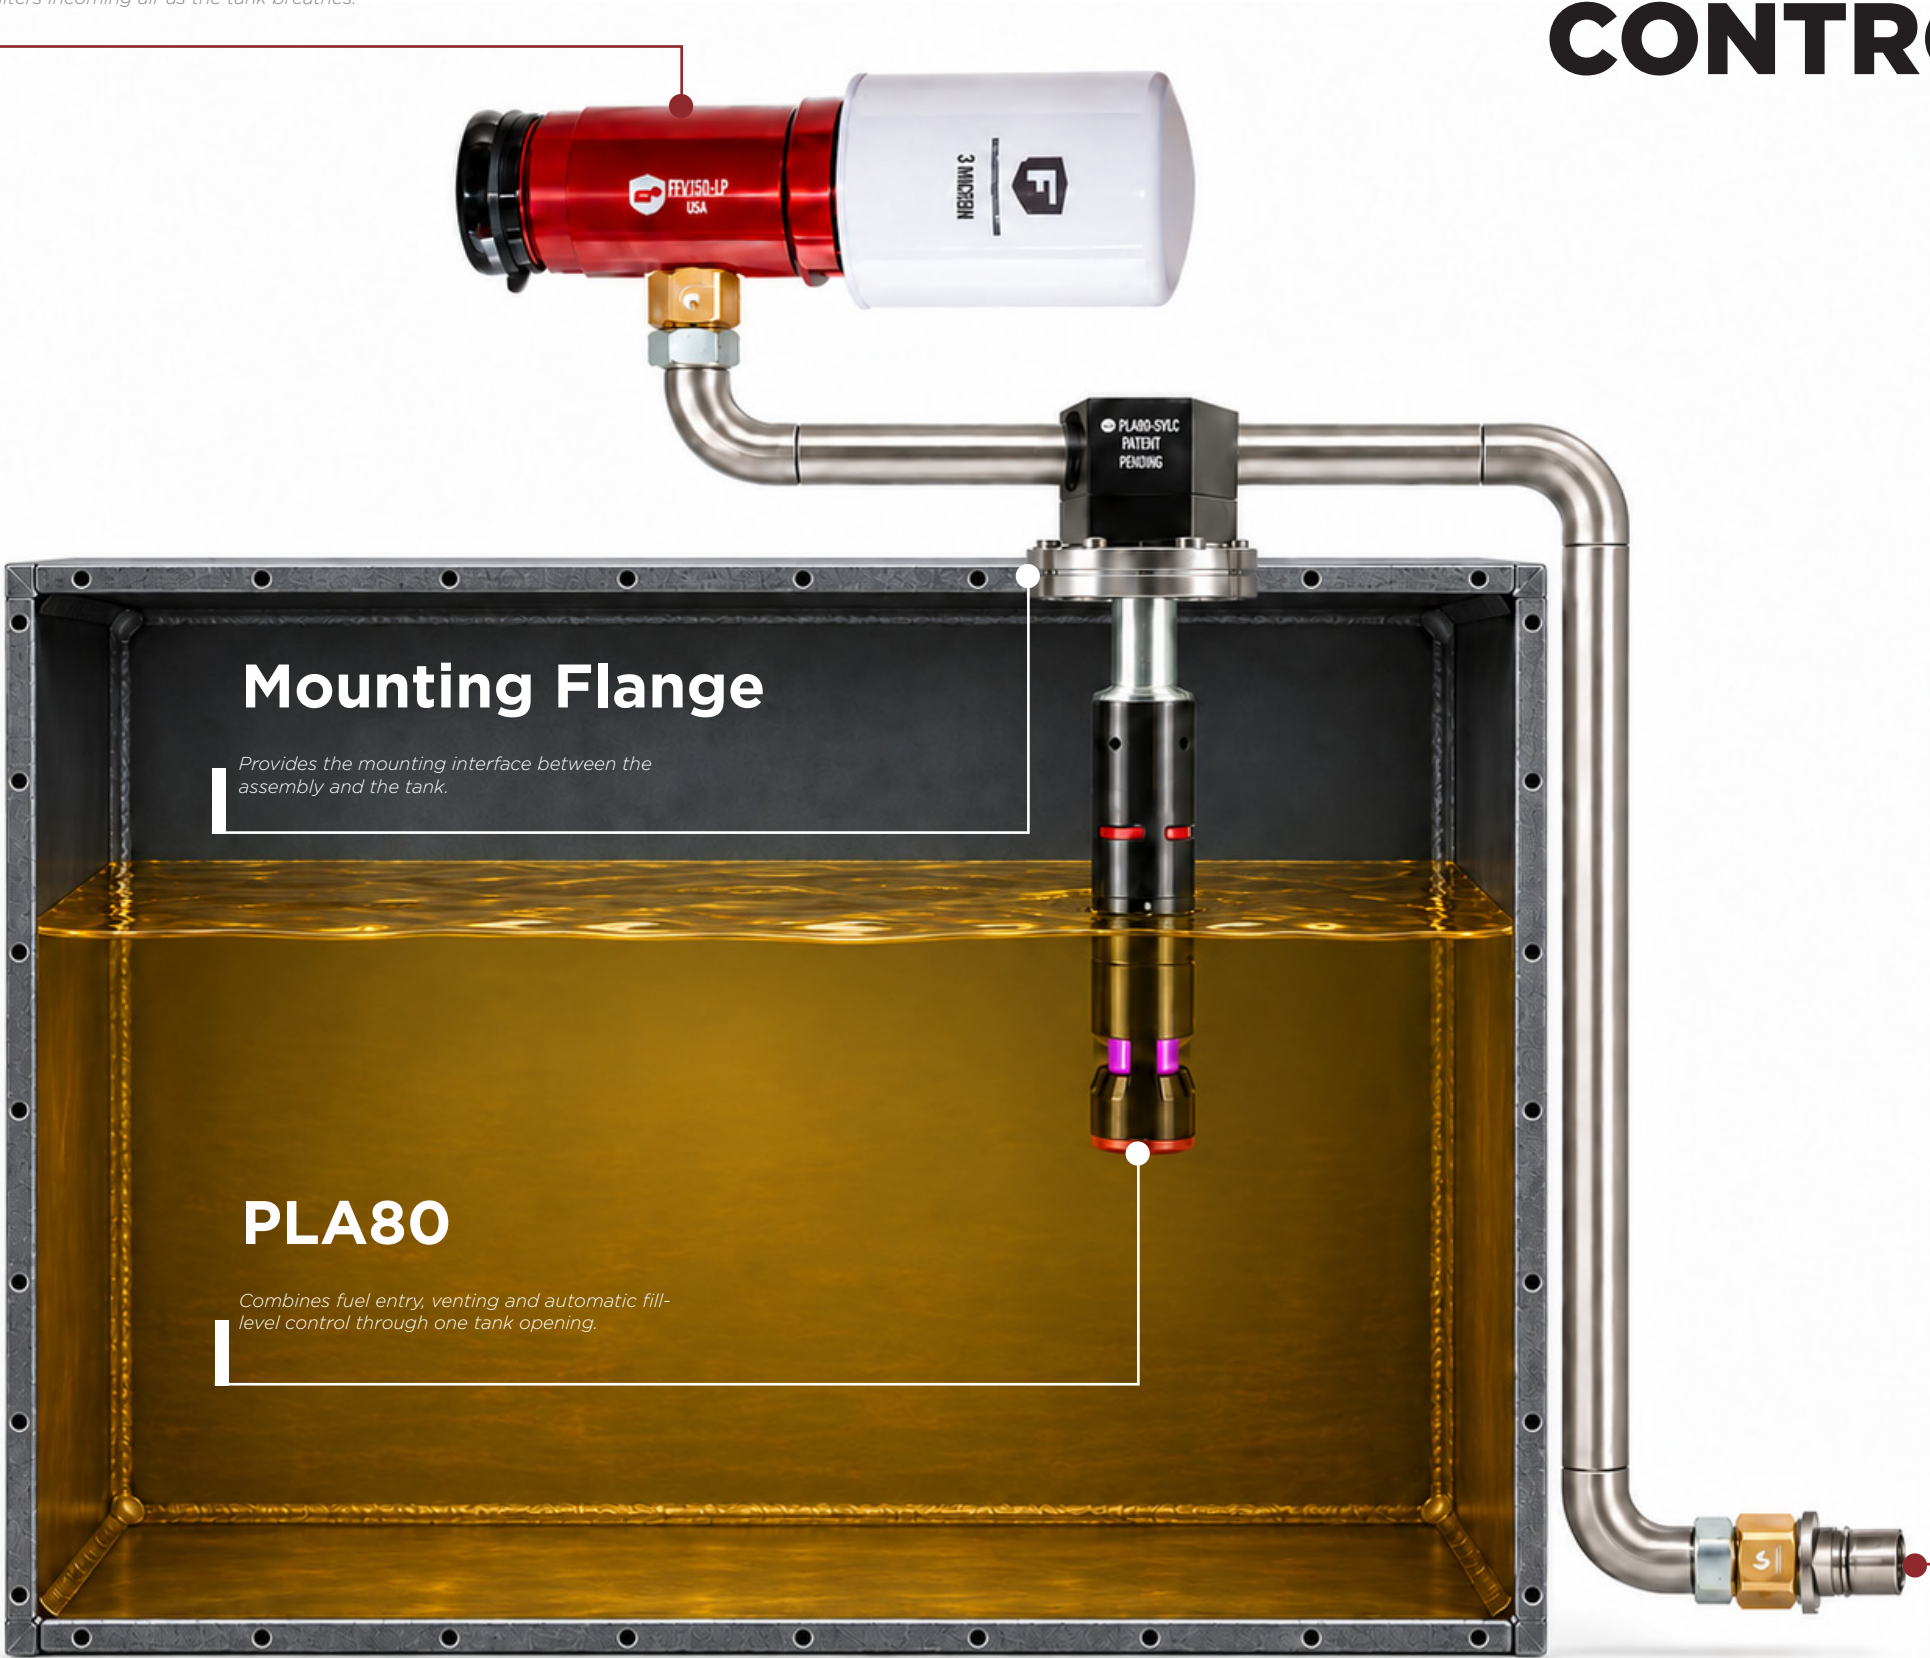

Mounting Flange

Provides the mounting interface between the assembly and the tank.

PLA80


Combines fuel entry, venting and automatic fill-level control through one tank opening.

Fuel Receiver

Provides the connection point for the matched fueling nozzle.



COUPLERS

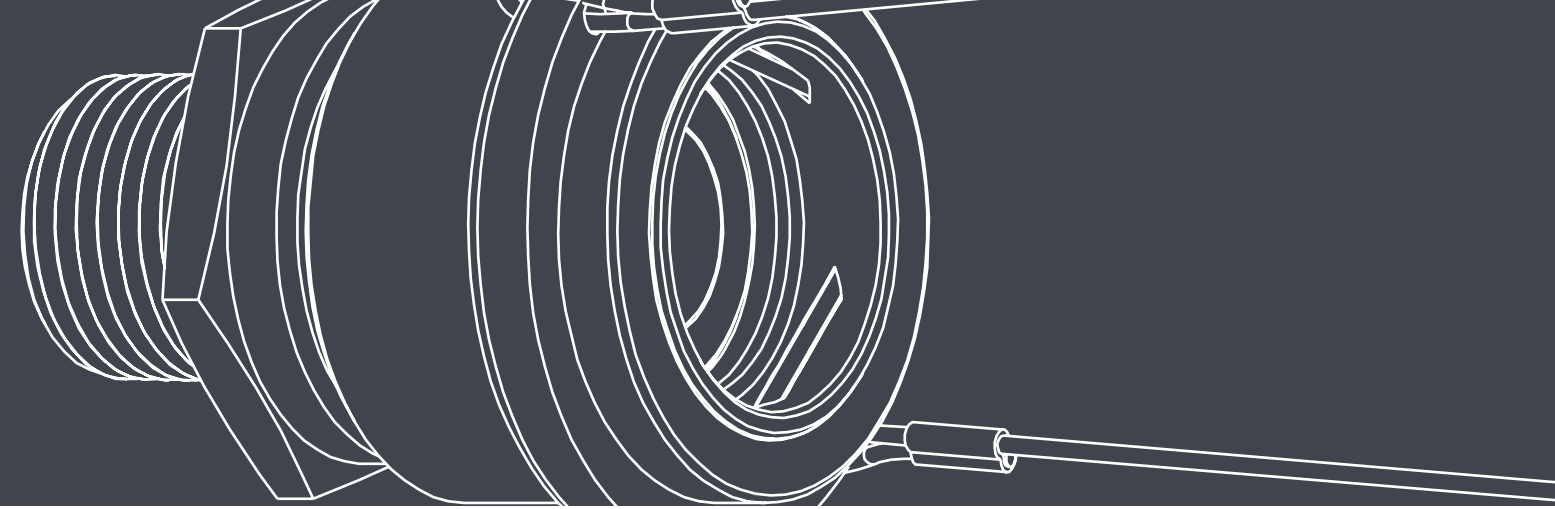

The right fluid. The right connection.

Four widely used couplers have been the primary means for fluid transfer of crankcase oils, coolant, hydraulic oils, and transmission oils. These couplers continue to provide a sturdy option and have been refined to be more reliable than ever. Options exist for remote bulkhead mounting, multiple thread options, and various latching mechanisms.

STANDARD CRANKCASE



Standard Crankcase Nozzles

Part No. N100p

Service nozzle for crankcase fluid transfer, designed to connect to the matched receiver in the Standard series.

Connection

3/4 in MNPT



Standard Crankcase Receiver

Part No. R100c

Tank-side receiver providing the connection point for the matched Standard crankcase service nozzle.

Connection

3/4 in MNPT



Standard Crankcase JIC Receiver

Part No. R100Jc

Extended receiver for bulkhead mounting, allowing a female JIC hose connection on the opposite side of the panel.

Connection Type	Mounting
JIC	Bulkhead

Shared series specifications

Max. Operating Pressure	Flow Area	Latching Mechanism
500 PSI / 34.5 bar	0.305 in ²	Pin latching

STANDARD COOLANT



Standard Coolant Nozzles

Part No. N200p

Service nozzle for coolant fluid transfer, designed to connect to the matched receiver in the Standard series.

Connection

1/2 in MNPT



Standard Coolant Receiver

Part No. R200c

Tank-side receiver providing the connection point for the matched Standard coolant service nozzle.

Connection

1/2 in MNPT



Standard Colant JIC Receiver

Part No. R200Jc

Extended receiver for bulkhead mounting, allowing a female JIC hose connection on the opposite side of the panel.

Connection Type	Mounting
JIC	Bulkhead

Shared series specifications

Max. Operating Pressure	Flow Area	Latching Mechanism
500 PSI / 34.5 bar	0.112 in ²	Pin latching

STANDARD HYDRAULIC



Standard Hydraulic Nozzles

Part No. N300p

Service nozzle for hydraulic fluid transfer, designed to connect to the matched receiver in the Standard series.

Connection

3/4 in FNPT



Standard Hydraulic Receiver

Part No. R300c

Tank-side receiver providing the connection point for the matched Standard hydraulic service nozzle.

Connection

3/4 in MNPT



Standard Hydraulic JIC Receiver

Part No. R300Jc

Extended receiver for bulkhead mounting, allowing a female JIC hose connection on the opposite side of the panel.

Connection Type

JIC

Mounting

Bulkhead

Shared series specifications

Max. Operating Pressure	Flow Area	Latching Mechanism
500 PSI / 34.5 bar	0.221 in ²	Dog teeth

STANDARD TRANSMISSION



Standard Transmission Nozzles

Part No. N400p

Service nozzle for transmission fluid transfer, designed to connect to the matched receiver in the Standard series.

Connection

1/2 in MNPT



Standard Transmission Receiver

Part No. R400c

Tank-side receiver providing the connection point for the matched Standard transmission service nozzle.

Connection

1/2 in MNPT



Standard Transmission JIC Receiver

Part No. R400Jc

Extended receiver for bulkhead mounting, allowing a female JIC hose connection on the opposite side of the panel.

Connection Type

JIC

Mounting

Bulkhead

Shared series specifications

Max. Operating Pressure	Flow Area	Latching Mechanism
500 PSI / 34.5 bar	0.114 in ²	Dog teeth

R SERIES CRANKCASE



R Series Crankcase Nozzle

Part No. N100Rp

Ball-latching service nozzle for crankcase fluid transfer with the matched R Series receiver.

Connection

3/4 in FNPT



R Series Crankcase Receiver

Part No. R100Rc

Receiver for the matched R Series crankcase nozzle, with internal and external threads for the specified installation.

External Thread	Internal Thread	Port Reference
1-5/8 in - 12 TPI	1-5/16 in - 12 TPI	-16 ORB



Receiver Jam Nut

Part No. JN100

Jam nut for securing the corresponding R Series receiver in the specified mounting arrangement.

Associated Receiver

R100Rc

Shared series specifications

Max. Operating Pressure	Flow Area	Latching Mechanism
500 PSI / 34.5 bar	0.364 in ²	Ball latching

R SERIES COOLANT



R Series Coolant Nozzle

Part No. N200Rp

Ball-latching service nozzle for coolant fluid transfer with the matched R Series receiver.

Connection

1/2 in FNPT



R Series Coolant Receiver

Part No. R200Rc

Receiver for the matched R Series coolant nozzle, with internal and external threads for the specified installation.

External Thread	Internal Thread	Port Reference
1-3/16 in - 12 TPI	7/8 in - 14 TPI	-10 ORB



Receiver Jam Nut

Part No. JN200

Jam nut for securing the corresponding R Series receiver in the specified mounting arrangement.

Associated Receiver

R200Rc

Shared series specifications

Max. Operating Pressure	Flow Area	Latching Mechanism
500 PSI / 34.5 bar	0.136 in ²	Ball latching

R SERIES HYDRAULIC



R Series Hydraulic Nozzle

Part No. N300Rp

Ball-latching service nozzle for hydraulic fluid transfer with the matched R Series receiver.

Connection

1 in FNPT



R Series Hydraulic Receiver

Part No. R300Rc

Receiver for the matched R Series hydraulic nozzle, with internal and external threads for the specified installation.

External Thread	Internal Thread	Port Reference
1-7/8 in - 12 TPI	1-5/8 in - 12 TPI	-20 ORB



Receiver Jam Nut

Part No. JN300

Jam nut for securing the corresponding R Series receiver in the specified mounting arrangement.

Associated Receiver

R300Rc

Shared series specifications

Max. Operating Pressure	Flow Area	Latching Mechanism
500 PSI / 34.5 bar	0.421 in ²	Ball latching

R SERIES TRANSMISSION



R Series Transmission Nozzle

Part No. N200Rp

Ball-latching service nozzle for transmission fluid transfer with the matched R Series receiver.

Connection

3/4 in FNPT



R Series Transmission Receiver

Part No. R200Rc

Receiver for the matched R Series transmission nozzle, with internal and external threads for the specified installation.

External Thread	Internal Thread	Port Reference
1-5/16 in - 12 TPI	1-1/16 in - 12 TPI	-12 ORB



Receiver Jam Nut

Part No. JN200

Jam nut for securing the corresponding R Series receiver in the specified mounting arrangement.

Associated Receiver

R400Rc


Shared series specifications

Max. Operating Pressure	Flow Area	Latching Mechanism
500 PSI / 34.5 bar	0.229 in ²	Ball latching

STANDARD HYDRAULIC

STANDARD TRANSMISSION

COUPLERS



Universal Crankcase Nozzle

Part No. N100U

Ball-latching nozzle for crankcase fluid servicing. Select the receiver connection according to the approved compatibility specification.

Connection	Max. Operating Pressure	Flow Area
3/4 in MNPT	500 PSI / 34.5 bar	0.421 in ²



Universal Coolant Nozzle

Part No. N200U

Ball-latching nozzle for coolant fluid servicing. Select the receiver connection according to the approved compatibility specification.

Connection	Max. Operating Pressure	Flow Area
1/2 in FNPT	500 PSI / 34.5 bar	0.229 in ²




MATRIX



74

Fast Fill Systems

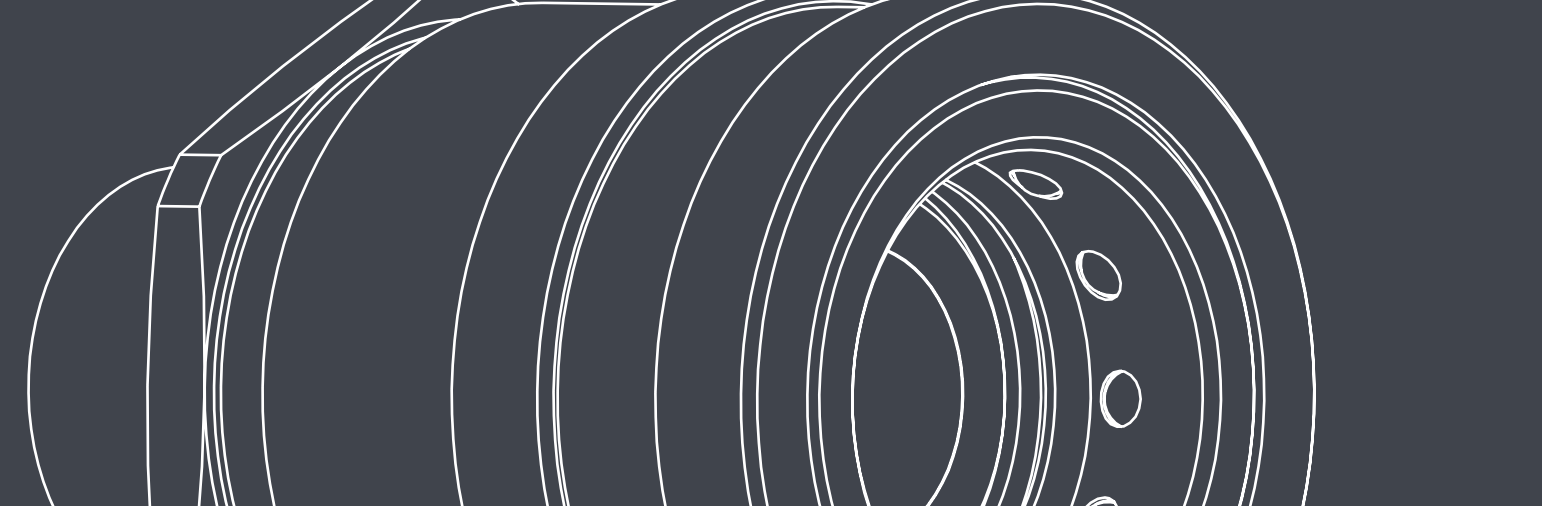

No guesswork. No mix-up.

The Matrix line is a sleek and cohesive collection of quick couplers designed to eliminate the problem of cross-contamination of fluids. The entire series is color-coordinated between nozzle and receiver, and each can only be coupled to its matching piece. Many sites utilize more fluids than can be uniquely assigned to the standard industry couplers.


Twelve unique colors and sizes are available for even the most complex fueling or maintenance stations. There are multiple flow rates and threading configurations to meet your unique fluid transfer needs. The Matrix Series boasts an evac tool that fits, like a master key, to all of the receivers for easy tank drain.

Keep Fueling

75

FLAT FLACE MATRIX

Flat Face Matrix couplers make cleaning before connection straightforward. The flat coupling surface wipes clean easily, while 12 color-coded, mechanically matched nozzle-receiver pairs help prevent incorrect connections and reduce cross-contamination during fluid transfer.

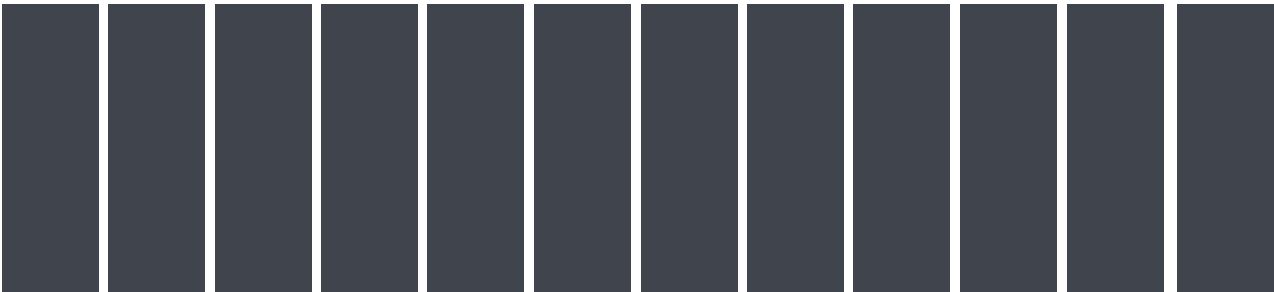

Nozzles	FFN210	FFN220	FFN230	FFN240	FFN250	FFN255	FFN260	FFN265	FFN270	FFN275	FFN280	FFN285
Receiver	FFR210c	FFR220c	FFR230c	FFR240c	FFR250c	FFR255c	FFR260c	FFR265c	FFR270c	FFR275c	FFR280c	FFR285c

MATRIX 300 SERIES

Matrix 300 Series couplers help keep fluid connections correctly matched across multi-fluid service operations. Ten color-coded nozzle-receiver pairs use mechanically matched interfaces to help prevent incorrect connections, with additional thread options available for different installations.



Nozzles	N305p	N307p	N310p	N320p	N330p	N340p	N350p	N360p	N370p	N380p
Receiver	R305c	R307c	R310c	R320c	R330c	R340c	R350c	R360c	R370c	R380c

Shared series specifications

Operating Pressure	Nozzle Thread	Receiver Thread	Latching Mechanism
103 bar / 1,500 PSI	3/4 in FNPT	3/4 in MNPT	Ball latching

Shared series specifications

Operating Pressure	Nozzle Thread	Receiver Thread
103 bar / 1,500 PSI	3/4 in FNPT	3/4 in MNPT

MX HIGH FLOW

MX High Flow dry-break couplers combine durable construction with easy-to-identify fluid connections. Seven color-coded, mechanically keyed nozzle-receiver pairs help prevent incorrect pairing, while grip-enhancing actuating rings and solid aluminum caps and plugs support everyday handling.



Nozzles	MXN1-1p	MXN2-1p	MXN3-1p	MXN4-1p	MXN5-1p	MXN6-1p	MXN7-1p
Receiver	MXR1-1c	MXR2-1c	MXR3-1c	MXR4-1c	MXR5-1c	MXR6-1c	MXR7-1c

HIGH FLOW 3/4” Matrix

High Flow 3/4” Matrix couplers combine color-coded pairing with a single-body receiver designed to reduce potential leak points. Retained caps and plugs help protect connections between uses, while pull cords support easier handling during routine fluid service.



Nozzles	N100U	N102-P	N103-P	N104-P	N105-P
Receiver	R100-C	R102-C	R103-C	R104-C	R105-C

Shared series specifications

Operating Pressure	Nozzle Thread	Receiver Thread	Latching Mechanism
34.5 bar / 500 PSI	1 in FNPT	1 in MNPT	7 matched pairs

Shared series specifications

Operating Pressure	Flow Area	Nozzle Thread	Receiver Thread	Latching Mechanism
34.5 bar / 500 PSI	0.421 in²	3/4 in NPT	1-3/8-18 UNEF	Ball latching

GREASE MATRIX

Grease Matrix flat-face dry-break couplers simplify bulk grease filling with a connection designed to couple and uncouple while maintaining supply pressure. An integrated valve prevents grease transfer until the nozzle and receiver are properly connected.



Nozzles	GN210	GN220
Receiver	GR210	GR220

Shared series specifications

Maximum Deadhead Pressure*	Nozzle Thread	Receiver Thread
345 bar / 5,000 PSI	3/4 in FNPT	3/4 in MNPT

HOW TO REQUEST A QUOTE

**Tell us what you
need. Let's get
started.**

Whether you need a replacement part or a complete fueling system, a few details help us prepare a quote for your application. Share your part numbers, quantities, delivery location, and required date. If you need help selecting products, include your equipment details and photos of the existing connections so we can help identify suitable options.



801.491.3600 //
orders@fastfillsystems.com //
www.fastfillsystems.com //

